

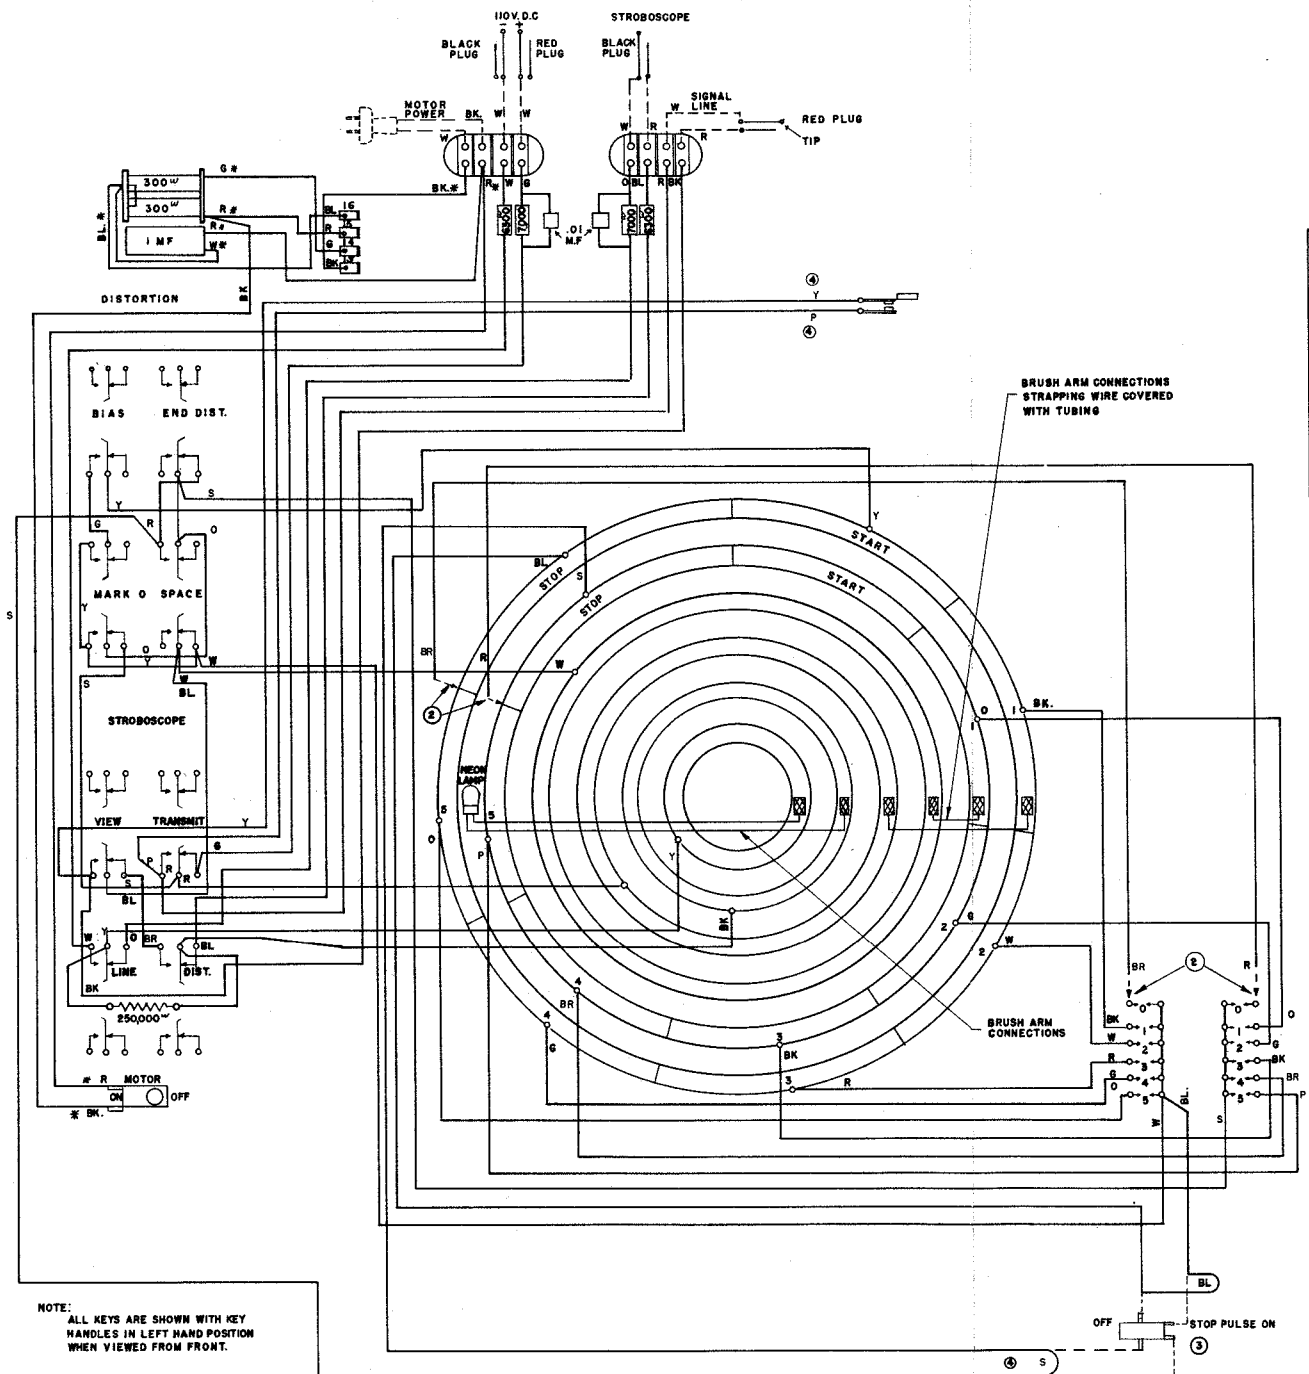


REVISIONS	
Q1	5-22-47 45622
R	1-9-48 45629

RTTY ELECTRONICS  
 TELETYPE=Sales-Service-Parts  
 PO Box 20101 El Sobrante, Ca.  
 94820. (510)222-3102  
 mr\_rtty@pacbell.net

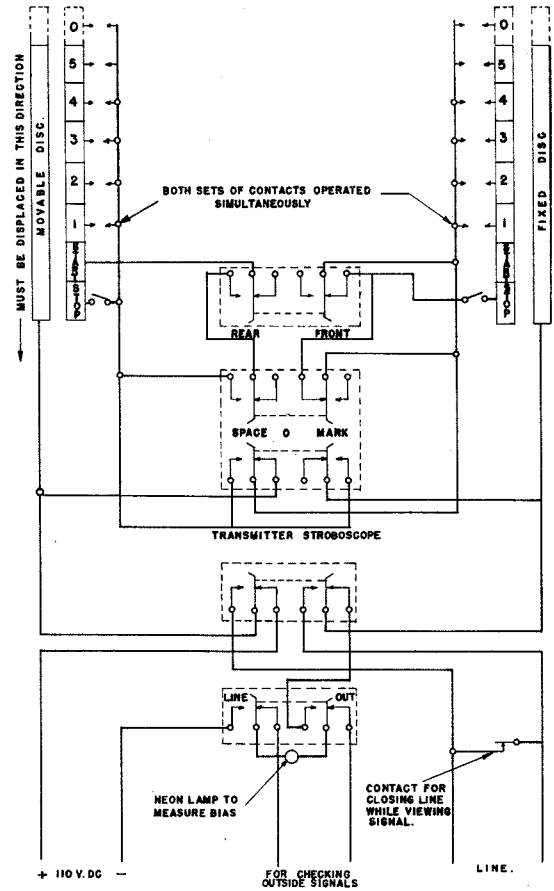

CODE	COLOR	ALTERNATES
S	SLATE	RED BLACK OR RED OR WHITE WITH RED TRACER OR SLATE OR WHITE WITH SLATE TRACER
Y	YELLOW	WHITE BLACK OR WHITE OR WHITE WITH WHITE TRACER OR YELLOW OR WHITE WITH YELLOW TRACER
P	PURPLE	GREEN BLACK OR GREEN OR WHITE WITH GREEN TRACER OR PURPLE OR WHITE WITH PURPLE TRACER
BR	BROWN	ORANGE BROWN OR ORANGE OR WHITE WITH ORANGE TRACER OR BROWN OR WHITE WITH BROWN TRACER
BL	BLUE	WHITE WITH BLUE TRACER
BK	BLACK	" " BLACK "
R	RED	" " RED "
W	WHITE	" " WHITE "
O	ORANGE	" " ORANGE "
G	GREEN	" " GREEN "

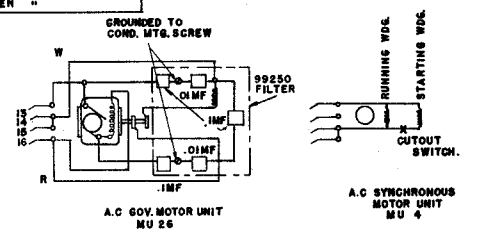

- NOTES:
- 1 ALL MOTOR WIRING \* IS INSULATED WIRE (INDICATED WITH \*) ALL OTHER WIRING \*\* IS INSULATED WIRE UNLESS OTHERWISE SPECIFIED.
  - 2 \*Y\* \*R\* AND \*R\* WIRES ON 5 UNIT MACHINES. ON 6 UNIT MACHINES CONNECT TO "NO O" CONTACTS AND SEGMENTS AS INDICATED BY DOTTED LINES.
  - 3 IF STOP PULSE SWITCH IS SUPPLIED, CUT LOOPS BL & S, TIN ENDS OF WIRE AND CONNECT TO SWITCH PER DOTTED LINES.

TELETYPE CORPORATION  
 WD 1653 - K

WIRING DIAGRAM  
 DISTORTION TEST  
 UNIT  
 OXD-4  
 MU-4, 26

DRAWN E.W.F.H.  
 TRACED W.M.S.  
 APPROVED W.C.E. J.C.T.  
 ENG'D E.W.F.H.