NO.	NOTES
1	REFER TO 5751 WD (SHEET 4) FOR SCHEMATIC
2	ALL SURFACE WIRE 24 GA. GREEN, 31784 RM, UNLESS OTHERWISE SPECIFIED.
3	ALL STRAPPING WIRE 24 GA BARE, 39603 RM. USE SLEEVING WHERE REQUIRED. DO NOT PULL TAUT BETWEEN TERMINALS.

COMP.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.	CONN.
COMP. DESIG.	JB604	JB518B	JB518C	JB618A	JB618B	JB618C	JB610	JB518B	JB518C	JB618A	JB618B	JB618C
ASSOC. ASSEM.	JB614	JB500B	JB500C	JB600A	JB600B	JB600C	JB620	JB500B	JB500C	JB600A	JB600B	JB600C
COMP. NO.	193029	193029	193029	193029	193029	193029	193029	193029	193029	193029	193029	193029

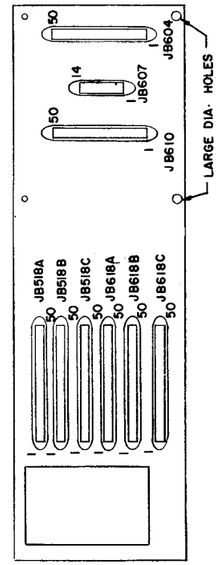

VIEW OF SOLDER SIDE OF CONNECTORS

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

5755 WD

REVISIONS		
ISSUE	DATE	AUTH. NO.
A	12-23-63	79366

ACTUAL WIRING DIAGRAM FOR MOUNTING PLATE

ASSEM. NO. 193195

APPROVALS	
D AND R	E OF M

E-NUMBER

PROD. NO. 5755 WD

DATE 8-10-63

P.D. FILE NO. 33-A25AA

DRAWN CG	CHKD.
ENGD. SP	APPD.

TELETYPE CORPORATION

5755 WD