
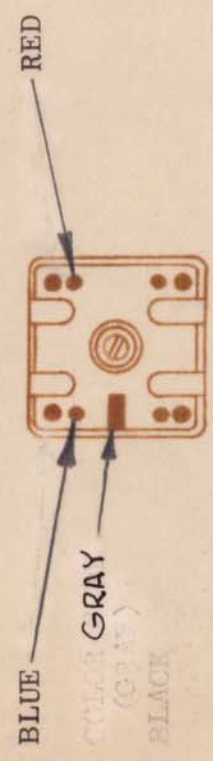



REQ. PER UNIT	USED ON	DATE
3	VLBB-1	3-25-65
	MODEL	ASSY. NO.
	VLBB-1	A 3662


AC177



ELECTRICAL SPECIFICATIONS
 (With slug inserted)
 OPERATING FREQUENCY:
 INDUCTANCE: @ 790 KC
 PRIMARY: 140 μ h \pm 5 μ h
 "Q" (PRIMARY) @ 180 KC: 60 MIN.

MECHANICAL SPECIFICATIONS
 TURNS
 PRIMARY: 100
 COLOR CODE: GRAY
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM.: 4
 MATERIAL:
 CORE & SLUG: POWDERED IRON

SCHEMATIC DIAGRAM



REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
4		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE	COIL, RF, ADJUSTABLE	
	MATERIAL		
	TYPE & TEMPER		
	HEAT TREAT. SPEC		
	FINISH & SPEC. NO.		
	DATE	CHECKER	ENG. APP.
	4-7-65	H.A.	
	3-25-65	H.A.	
	SCALE		
	CODE		
	A		
	TOLERANCES		
	FRACTIONS		
	UNLESS OTHERWISE SPECIFIED		
	DIMENSIONS ARE IN INCHES AND INCLUDE		
	CHEMICALLY APPLIED OR PLATED FINISHES		
	DECIMALS		
	X \pm .05		
	.XX \pm .01		
	.XXX \pm .005		
	ANGLES,		
	\pm 0° 30'		
	2A3797		
		H. Austin	3-29-65
		DRAWN	CHECKED
		008	
			FINAL APPROVAL
			AC177