


REQ. PER. UNIT		USED ON	
2	CHG-1	ASSY. NO.	DATE
2	CHG-2	MF/RF	9-20-60
		MF/RF	

A-1972 A

- SPECIFICATIONS -

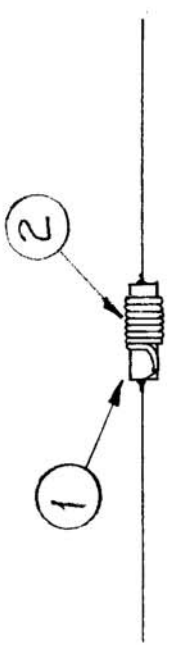

L = .9 why ± .05 why
 Q = 110
 FREQ = 25 MCS

Solenoid Winding, Close Wound.
 WINDING ~ 7-1/2 TURNS (APPROX.)

X	2	WI-107-5	DOUBLE SILK COVER, WIRE	
	1	CI-114	CORE	
REQ. ITEM		PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP.	
			MAMARONECK, NEW YORK	
			CL-241, COIL ASSY	
			.9 why	
			D.M.P.	
			DRAWN	CHECKED
			A.K.F.	
			ELEC. DES. APP.	MECH. DES. APP.
			FINISH & SPEC. NO.	
			TYPE & TEMPER	HEAT TREAT. SPEC.
				FINAL APPROVAL
				A-1972 A

ISSUE ITEM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A 2	3.25.64	11097	JTB	@	8
ON WINDING ADD. (APPROX.)					
ON U/O INF. ADDED (2) (CHG-2) (MKS)					
CHANGED FROM					
TOLERANCES					
DEC. DIM. ±					
FRAC. DIM. ±					
ANGULAR DIM. ±					
SCALE:					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					