


A-32550

REQ. PER UNIT	MODEL	ASSY. NO.	DATE
4	GPT-200K (AX-395)	A-2821	8-13-63
3	GPT-200K (AX-395)	A-2822	8-13-63
3	GPT-200K (AX-395)	A-2823	8-13-63

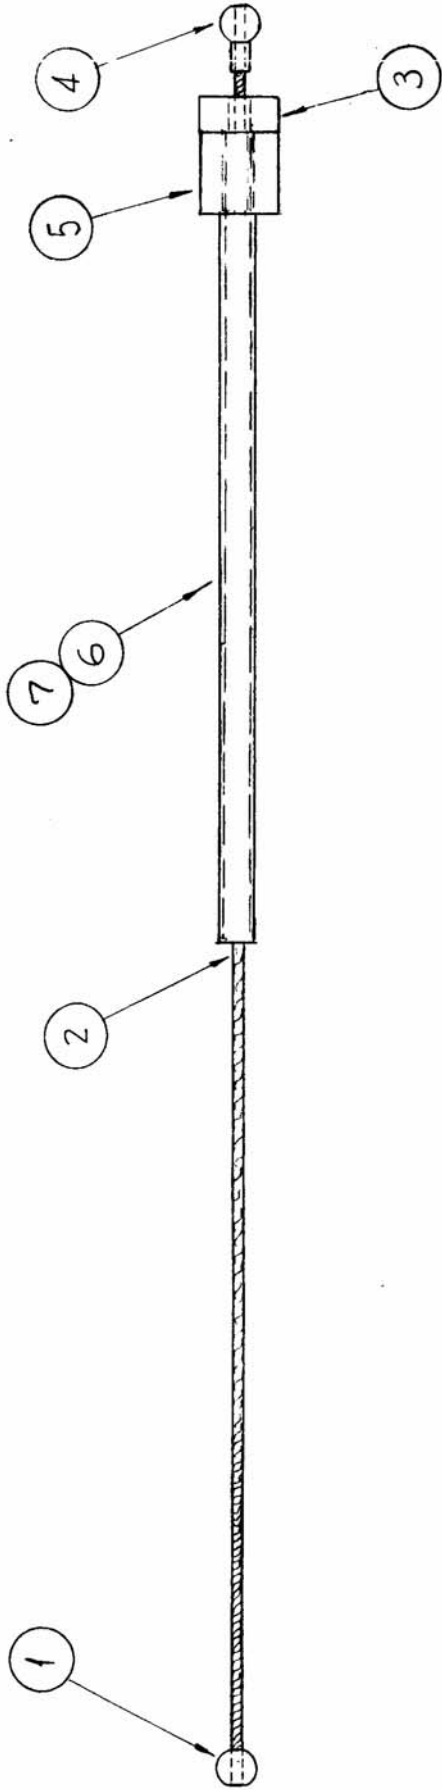

NOTES -

- 1-MAX. BREAKING STRENGTH IN LBS., 360LBS (IN ACCORDANCE WITH MIL-C-18375)
- 2-CABLE SHOULD BE TESTED AT 60% OF MAX. STRENGTH, 216LBS., PRIOR TO SHIPPING.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 7	PK-370-7-7-3.750	INSULATION SLEEVING, TEFLON	NATURAL
X 6	PK-370-11-7-4.250	INSULATION SLEEVING, TEFLON	NATURAL
1 5	TE-176-3	STANDOFF, SILICONE GLASS	
1 4	PO-292	BALL, END WIRE ROPE STOP	
1 3	PM-988	COLLAR, STOP	
1 2	WI-145-1	CABLE, AIRCRAFT	
1 1	PO-291	BALL, END WIRE ROPE STOP	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		F. BUDETTI	
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		WIRE ROPE ASSY	
		SRG	
		DRAWN: <i>SRG</i>	
		CHECKED: <i>SRG</i>	
		DATE: <i>APR 3-30-64</i>	
		FINAL APPROVAL	
		<i>[Signature]</i>	
		ELEC. DES. APP. MECH. DES. APP.	
		FINISH & SPEC. NO.	A-32550

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIGINAL RELEASE FOR PRODUCTION	3-1-64				
		SCALE	1" = 1"			
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				
		FRACTIONS ± 1/64 ANGLES ± 0° 30'				
		TOLERANCES	A			
		CODE	S401-277			