


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

BREAK CONDUCTOR OUT 2" FROM END; CUT OFF 1/2" OF CONDUCTOR. STRIP 1/2" AND TIN.

BREAK CONDUCTOR OUT 2" FROM END. STRIP 1/2" AND TIN. ALSO TIN 1/2" OF SHIELD.

CA-201-A

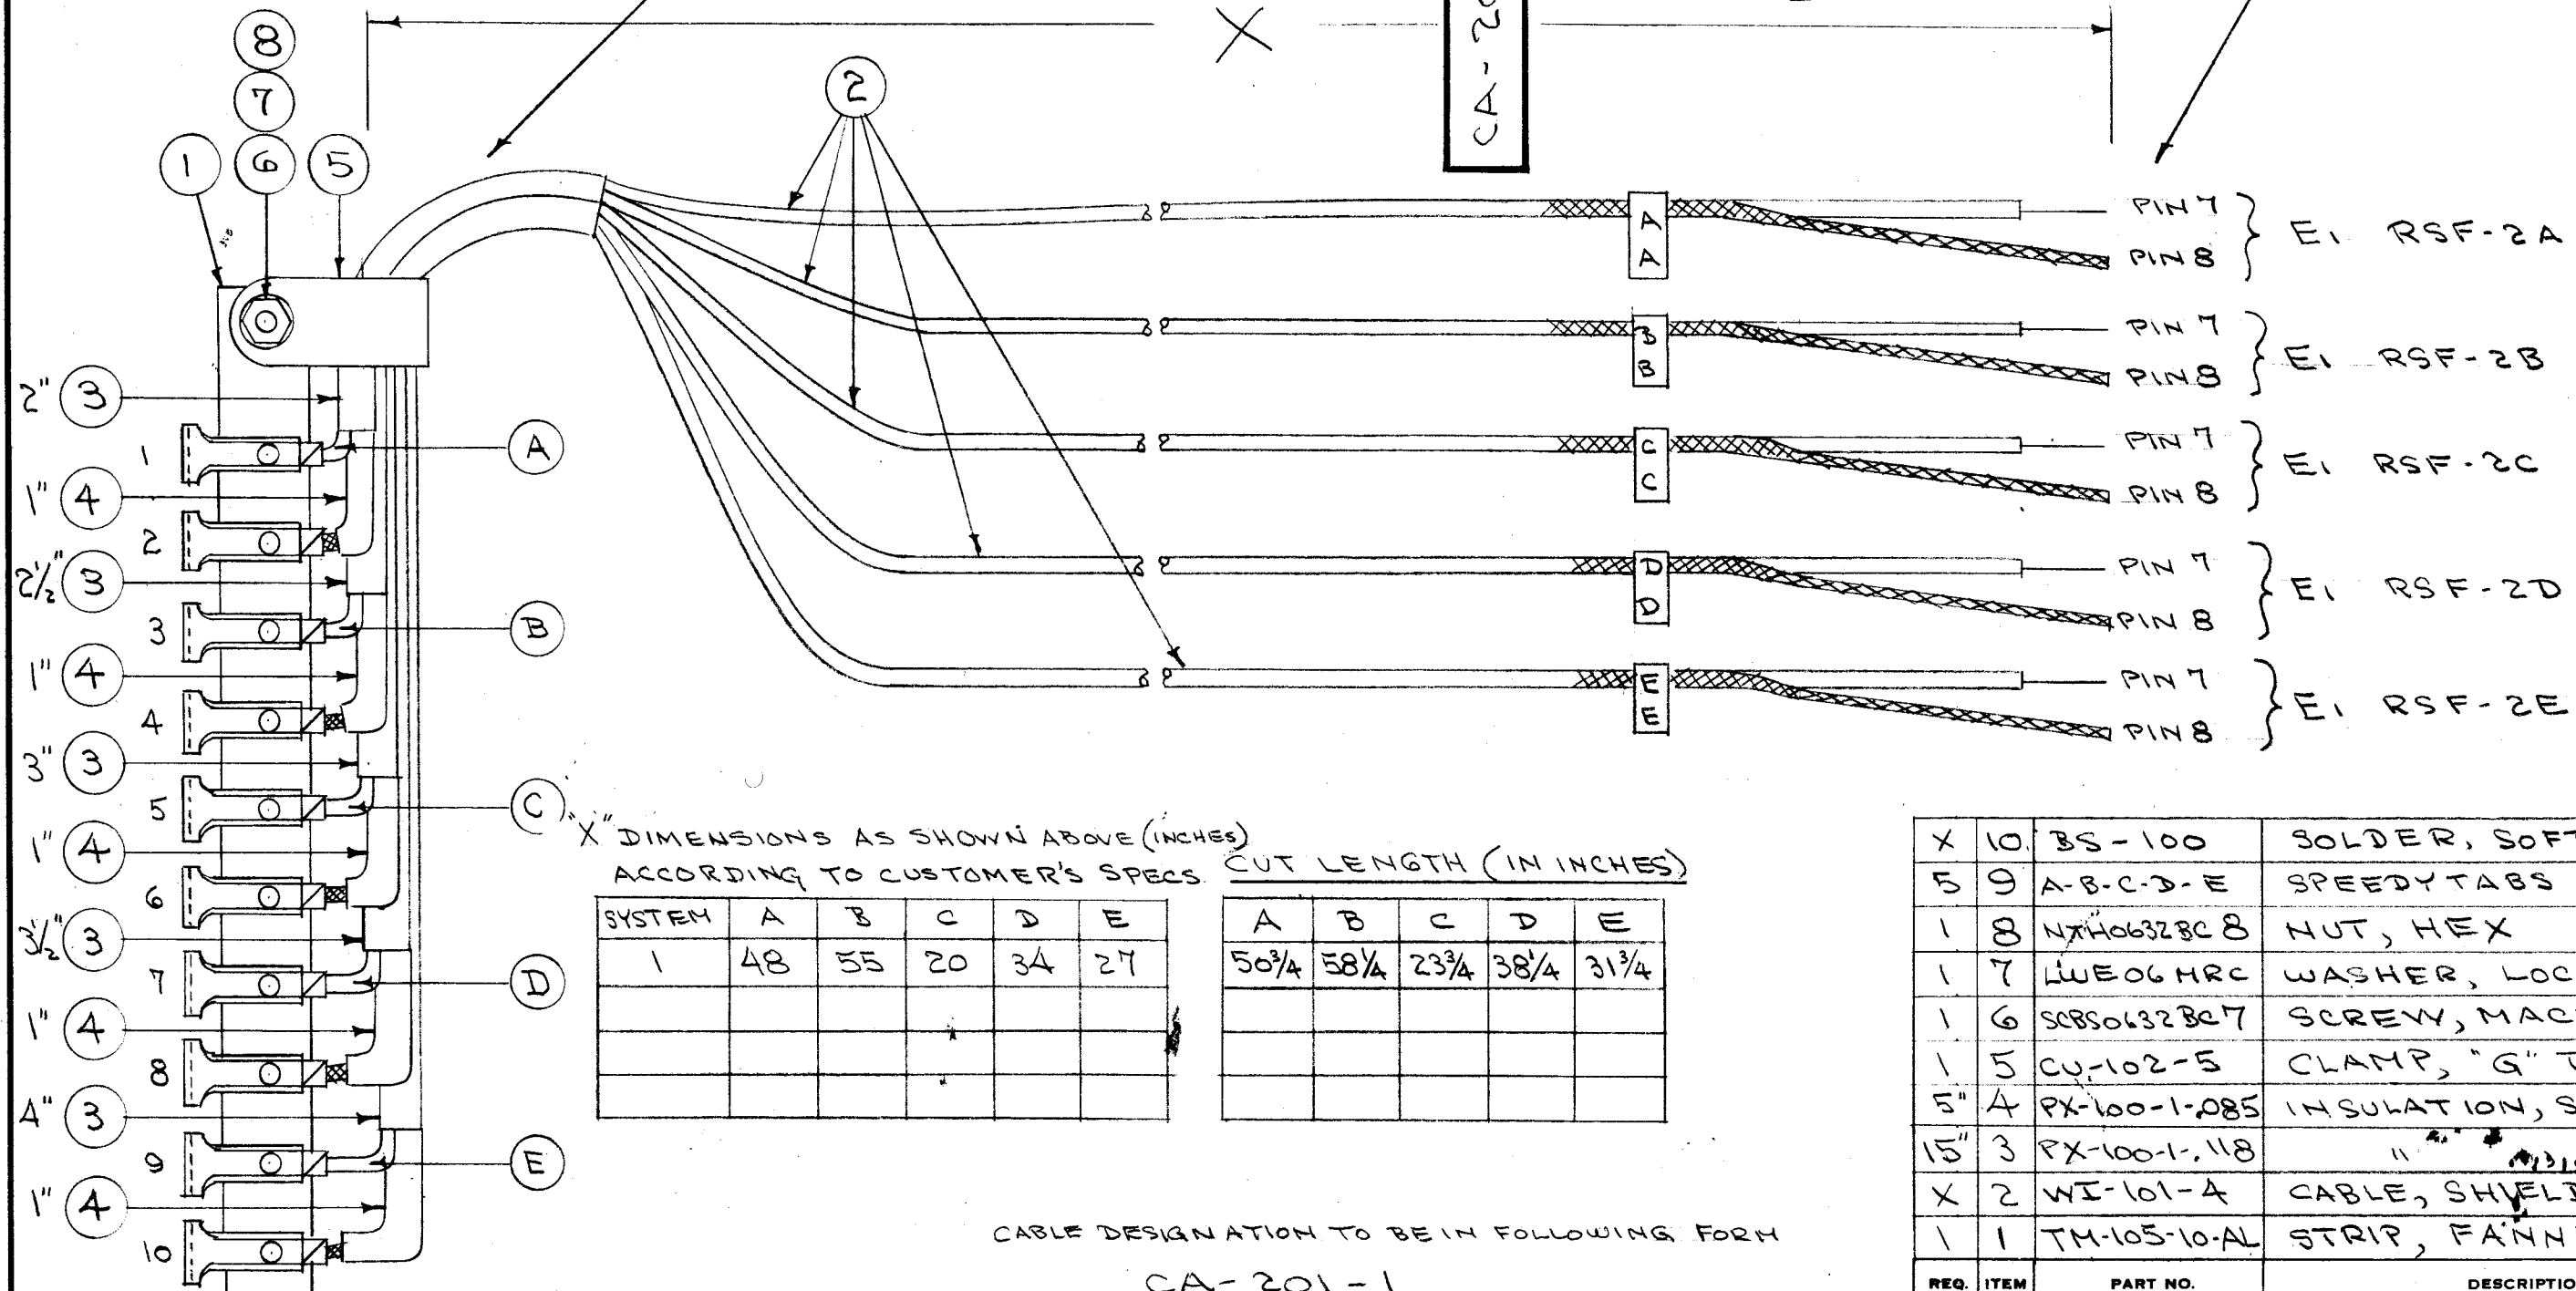

"X" DIMENSIONS AS SHOWN ABOVE (INCHES) ACCORDING TO CUSTOMER'S SPECS. CUT LENGTH (IN INCHES)

SYSTEM	A	B	C	D	E	A	B	C	D	E
1	48	55	20	34	27	50 3/4	58 1/4	23 3/4	38 1/4	31 3/4

CABLE DESIGNATION TO BE IN FOLLOWING FORM

CA-201-1
 SYMBOL NUMBER SYSTEM

X	10	BS-100	SOLDER, SOFT	
5	9	A-B-C-D-E	SPEEDY TABS	
1	8	NTH06328C8	NUT, HEX	
1	7	LWEO6MRC	WASHER, LOCK	
1	6	SCBS06328C7	SCREW, MACHINE	
1	5	CU-102-5	CLAMP, "G" TYPE	
5"	4	PX-100-1-085	INSULATION, SLEEVING	
15"	3	PX-100-1-118	"	
X	2	WI-101-A	CABLE, SHIELDED	
1	1	TM-105-10-AL	STRIP, FANNING	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		CABLE, INTERCONNECT (RSM-RSF) RCR SYSTEM	
		C.D.D. 12-14-54	P.L.K. 12-16-54
		DRAWN	ELEC. DES. APP. MECH. DES. APP.
		CHECKED FINAL APPROVAL	
		CA-201 A	

A	1	COMPLETE REVISION	12/14/54	1	CSB	JAD	AMS
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE:				
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±		DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.				
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE	USED ON		