


UNLESS OTHERWISE SPECIFIED  
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE  
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS


SPACES LACING APPROXIMATELY 3/4" APART.



SYMBOLS

- ~ INDICATES ITEM NO.
- ▽ ~ INDICATES PIN NO.

RTMU-1

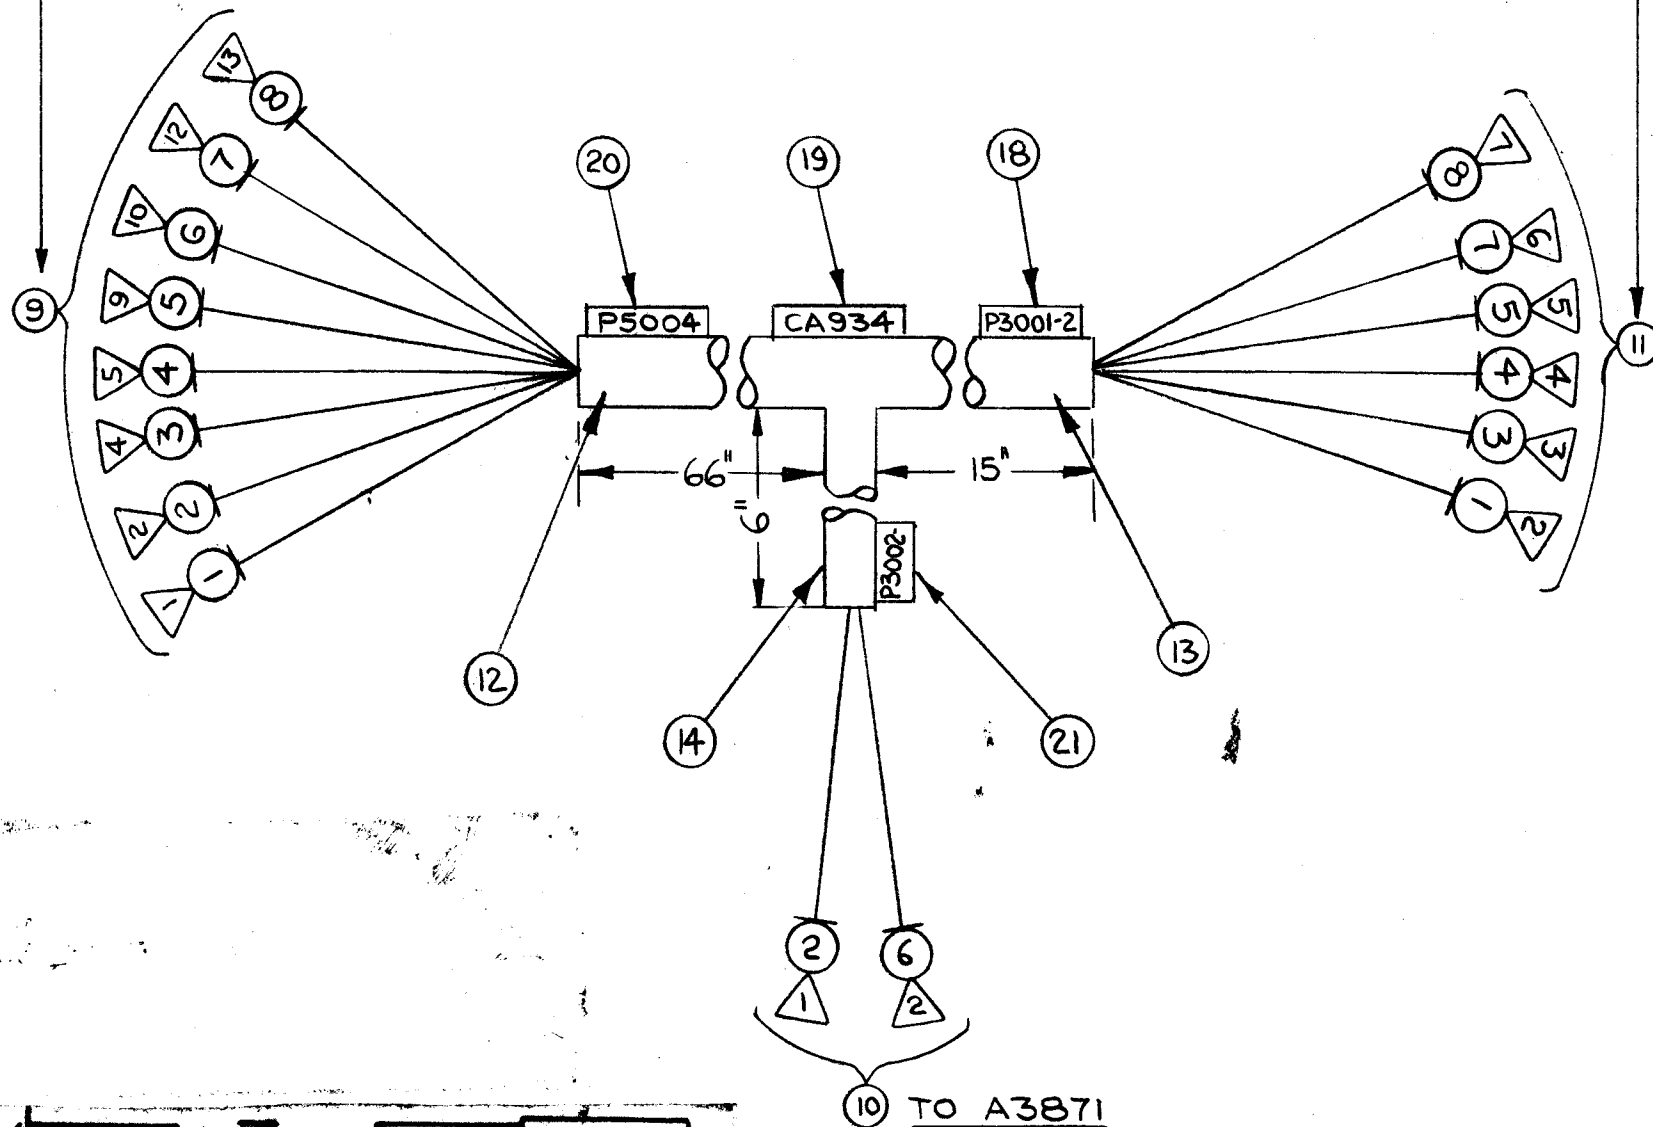

B  
CA934

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	10.21.64	X	hbs		
X <sub>1</sub>	ITEM 10 & 11 REVERSED	1-27-65	X <sub>1</sub>			
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-19-65	Ø	JK		
A	IT. 10 WAS PL116-1; IT. 11 WAS PL106-1; IT. 18 WAS LA107-18-479; IT. 19 WAS LA107-18-415; IT. 20 WAS LA107-20-421; IT. 21 WAS LA107-109; IT. 22 ADD; IT. 17 THRU 21: "I" ADD. TO QTY; IT. 9 WAS JJ313-2H.	4-29-65	13964	SL		
B	IT 17. WAS MS3420-10	7/23/65	14494	WLV		

REQ'D.	ITEM	PART NUMBER	FROM (DESCRIPTION)	TO	SYMBOL
X	22	B5100			SOLDER, TIN ALLOY
I	21	LA107-7-P3002			SLEEVE, MARKER, CABLE-SPLIT
I	20	LA107-20-P5004			SLEEVE, MARKER, CABLE-SPLIT
I	19	LA107-18-CA934			SLEEVE, MARKER, CABLE-SPLIT
I	18	LA107-18-P3001-2			SLEEVE, MARKER, CABLE-SPLIT
I	17	MS3420-10A			BUSHING, RUBBER
	16	TA100-1			INSULATION TAPE, ELECTRICAL-PLASTIC
	15	CD101-1MW			CORD, NYLON, LACING
	14	PX100-1-095			INSULATION SLEEVING-SZ 11
	13	PX100-1-133			INSULATION SLEEVING-SZ 8
	12	PX100-1-186			INSULATION SLEEVING-SZ 5
	11	PL116-1			CONNECTOR, PLUG, ML-8/C
	10	PL106-1			CONNECTOR, PLUG, ML-4/C
	9	JJ313-1H			CONNECTOR, RECEPTACLE, MALE 25/C
	8	MWC22 (7) U8	P5004 PIN 13	P3001-2 PIN 7	
	7		7	12	P3001-2 PIN 6
	6		6	10	P3002 PIN 2
	5		5	9	P3001-2 PIN 5
	4		4	5	P3001-2 PIN 4
	3		3	4	P3001-2 PIN 3
	2		2	2	P3002 PIN 1
	1	MWC22 (7) U1	P5004 PIN 1	P3001-2 PIN 2	

F. EATON		LIST OF MATERIAL			
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		CABLE, HARNESS, BRANCHED			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL	DATE
		hbs	10.21.64	[Signature]	4/19/65
		CHECKED	DATE		
		ELECT. DES.	DATE	CA934	B
		MECH. DES.	DATE		
				SHEET	REV. LTR.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

1	RAK-102-2	DDRR-5B
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
	A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		