


| | | | | |
|---------------|---------|-----------|-----------|---------|
| REQ. PER UNIT | USED ON | MODEL | ASSY. NO. | DATE |
| 1 | | GPT-10KLF | AX569 | 2-28-66 |
| | | CA993 Ø | | |

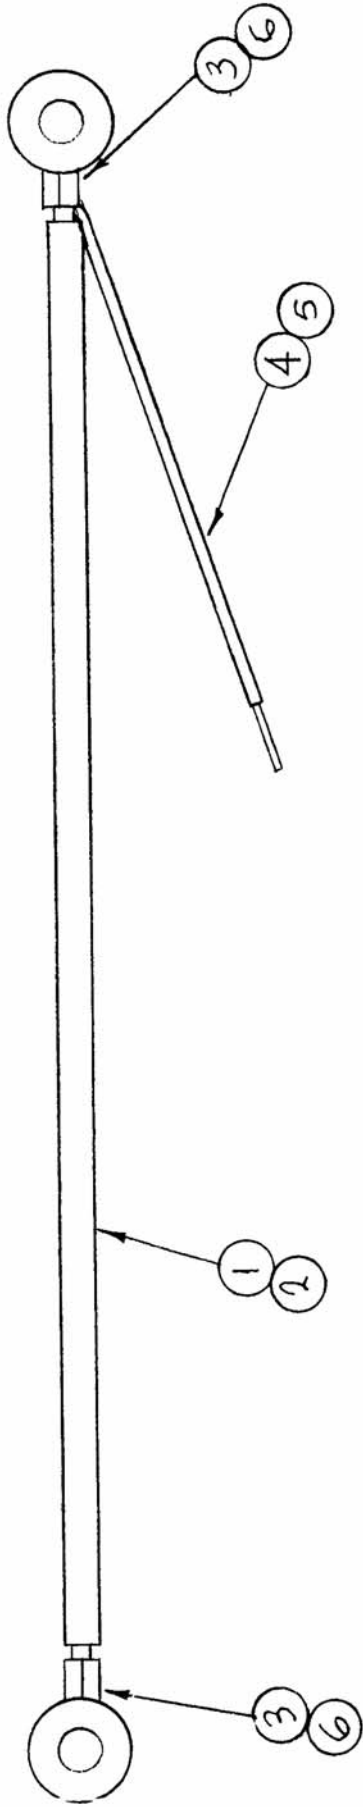

| REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL |
|-----------|-----------------|---|---------------------------|
| X 6 | BS100 | SOLDER, TIN ALLOY | |
| X 5 | PX 370-16-7-25 | INS. SLVG ELECT. | |
| X 4 | WL100-6 | WIRE, ELECT. BUSS | |
| 2 3 | TE 141-4 | TERM LUG, 1/4-20 | |
| X 2 | PX 370-12-7-7.5 | INS. SLVG ELECT | |
| X 1 | WL100-2 | WIRE, ELECT, BUSS | |
| | | F. BUDETTI DESCRIPTION | |
| | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | |
| | | CABLE, INTERCONNECT | |
| | | SWR COUPLER | |
| | | DRAWN <i>JCB</i> | CHECKED <i>JCB</i> |
| | | DATE 3-1-66 | SCALE 1:1 |
| | | CHECKER <i>JCB</i> | ENG. APP. <i>HDe</i> |
| | | DRAFTS <i>Je</i> | |
| | | CH. NO. <i>M</i> | |
| | | DATE 3-1-66 | |
| | | DESCRIPTION ORIGINAL RELEASE FOR PRODUCTION | |
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | |
| | | FRACTIONS ± 1/64 ANGLES ± 0°-30' | |
| | | TOLERANCES DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | |
| | | FINISH & SPEC. NO. | |
| | | ELEC. DES. APP. <i>MD</i> | MECH. DES. APP. <i>MD</i> |
| | | FINAL APPROVAL <i>M/May</i> | |
| | | CA993 Ø | |