


| | | | |
|--------------------|-----------------|------------|------|
| REQ. PER UNIT 1 | USED ON | | |
| | MODEL HFSR-1 | ASS'Y. NO. | DATE |

LD1611 A

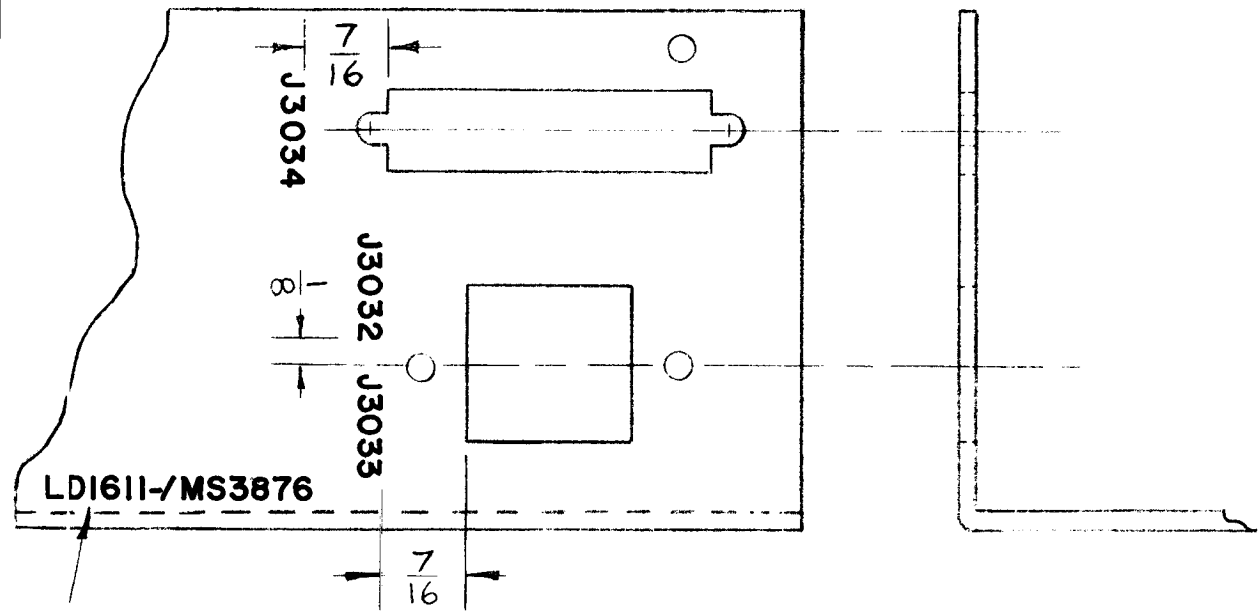

LD1611-MS3876

MARK TMC PART NO. WITH LATEST REV. LETTER

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.
 LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

REF: MS3876

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM | PART NO. | EATON | DESCRIPTION | SYMBOL | |
|-----|---|---|-----------|--------|---------|-----------|-----------|--------------------|-------------------|--|---------------------------|------------------------|
| A | CLERICAL CHANGE | 11-4-64 | | J.L. | | | | | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | MARKING, MOUNTING BRACKET | |
| Ø | PRODUCTION RELEASE FOR PRODUCTION | 9-25-64 | Ø | J.L. | | | | STOCK SIZE | | | | |
| X | EXPERIMENTAL RELEASE | 9-23-64 | # | J.L. | | J.M. | | | | | | |
| | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | SCALE | | | | | | | | | | |
| | DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | FRACTIONS ± 1/64 ANGLES ± 0° 30' | CODE A | | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN J.L. | CHECKED J.L. | FINAL APPROVAL J.L. |
| | TOLERANCES | | | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP. J.L. | MECH. DES. APP. J.L. | LD1611 A |