| REQ. PER UNIT | USED ON MODEL | ASS'Y. NO. | DATE | LD1860 | Ø |
|---|---|---|---|---|---|
| 1 | RFTA-1 | | 4.22.1965 | | |

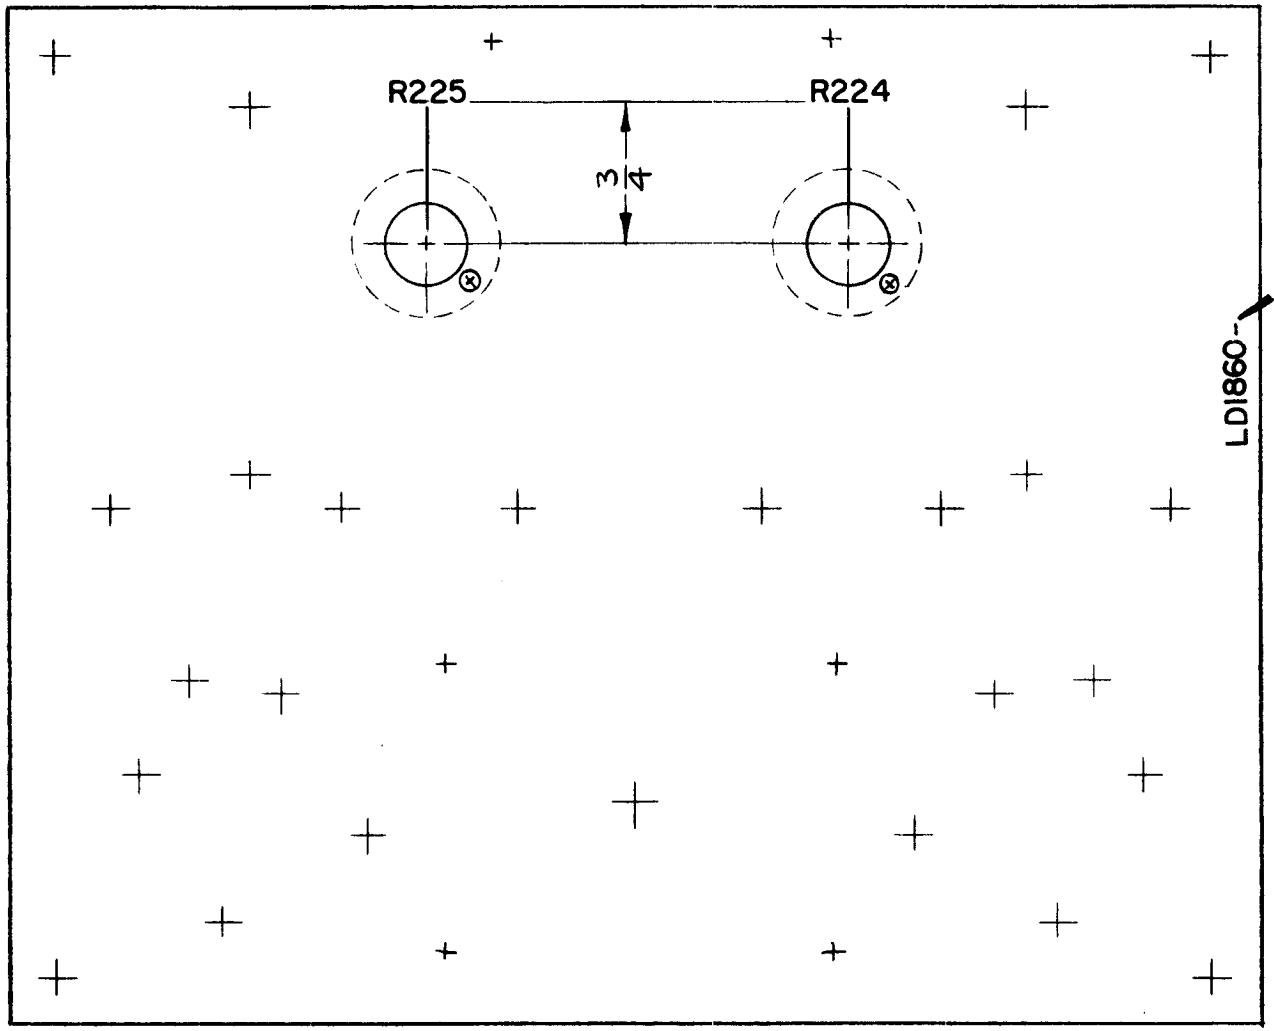


MARK TMC P/N, WITH LATEST REVISION LETTER

MARKING PROCESS:
AS PER TMC SPEC. S-727

LETTERING:
1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN

REF: PM1193

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|
| Ø | ORIGINAL RELEASE FOR PRODUCTION | 5/20/66 | Ø | CV | | |
| X1 | PIN HOLES RELOCATED | 6-9-65 | X1 | | | |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | | RBUDETTI | |

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

MARKING, PLATE, GEAR, FRONT

MARKING PROCESS: TMC S-727

| DRAWN | CHECKED | FINAL APPROVAL |
|---|---|---|
| NB | JCB | DB |

| ELEC. DES. APP. | MECH. DES. APP. | LD1860 | Ø |
|---|---|---|---|
| 5/19/66 | | | |

5/20/66

TMC FORM 108-A

REPROVEL NO. 440H 23845