


REQ. PER UNIT	USED ON			MS-1943	A
	MODEL	ASS'Y. NO.	DATE		
1	AX-212	GPT-40K	1/13/60		

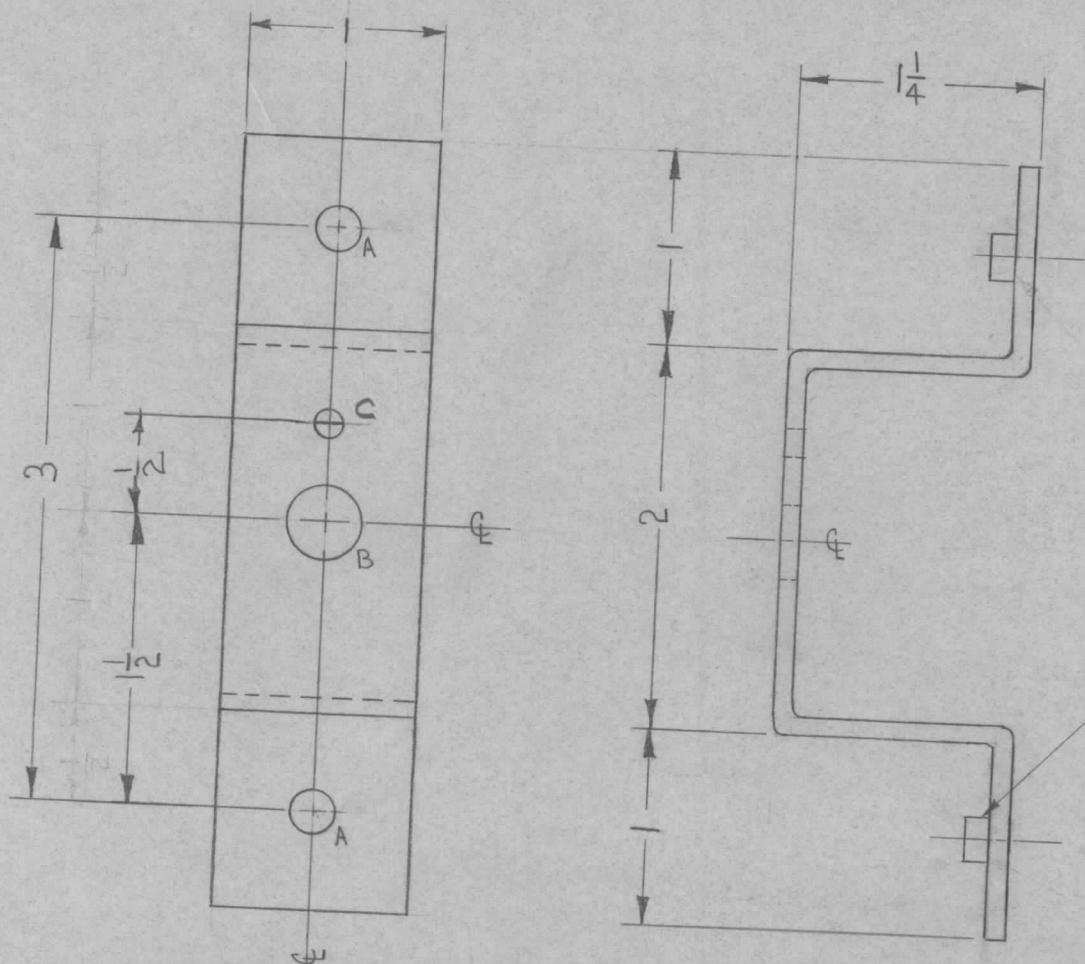

A - $\frac{221}{224}$ D. (FOR NT-129-832-4) 2 REQ.
 B - $3/8$ (.375) D. 1 REQ.
 C - $9/64$ (.140) D. 1 REQ.

MOUNT NT-129-832-4 IN "A" HOLES AS SHOWN

A 1		ONE "C" HOLE ($9/64$) D. ADDED	2-1-60	1827	W.F.	J.D.	RLN	2	1	NT-129-832-4	NUT, ROUND, SWAGE TYPE	
ISSUE ITEM		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
TOLERANCES		SCALE: FULL						.081 THICK		STOCK SIZE		
DEC. DIM. \pm		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES						ALUMINUM		THE TECHNICAL MATERIEL CORP.		
FRAC. DIM. $\pm 1/64$								5052-H32		HEAT TREAT. SPEC.		BRACKET, POTENTIOMETER MTG.,
ANGULAR DIM. \pm		S404 YEL. IRIDITE		FINISH & SPEC. NO.		(CROWBAR DRAWER)			MAMARONECK, NEW YORK			
		DRAWN		CHECKED		FINAL APPROVAL			W.F.			
		Em		RLN		MS-1943			A			
		ELEC. DES. APP.		MECH. DES. APP.								