

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES


| DECIMALS | TOLERANCES | FRACTIONS |
|-------------|------------|-----------------|
| .X ± .05 | | ± 1/64 |
| .XX ± .01 | | ANGLES ± 0° 30' |
| .XXX ± .005 | | |

CUT HERE
GUARANTEED
R2-66
REQ.
PER
UNIT

MS-267 A

USED ON

| MODEL | PROJECT NO. | ASS'Y. NO. | DATE |
|-------|-------------|------------|---------|
| CFA | | | 8-15-55 |

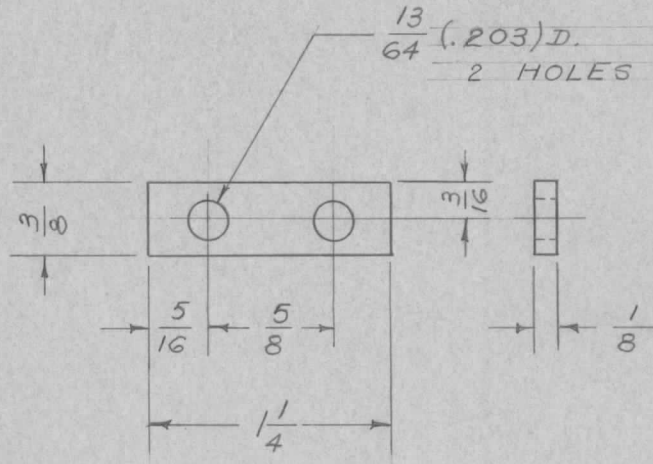

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|------|------|--------------------|-------------------------------|---------------------------------|
| | | | THE TECHNICAL MATERIEL CORP. | |
| | | | MAMARONECK. NEW YORK | |
| | | STOCK SIZE | | |
| | | ALUMINUM | SUB CHASSIS SHIM FS CONVERTER | |
| | | MATERIAL | WEIGHT PER PC. | |
| | | 52 S-H 32 | CFA | |
| | | TYPE & TEMPER | PA 8-15-55 | |
| | | | WDC | |
| | | HEAT TREAT. SPEC. | DRAWN | ELEC. DES. APP. MECH. DES. APP. |
| | | | JAD | AJT |
| | | | CHECKED | FINAL APPROVAL |
| | | S404-IRIDITE | | MS-267 A |
| | | FINISH & SPEC. NO. | | |

| | | | | | | | |
|------------|--|--------------------------------------|---|---------|--------|---------|-----------|
| A | 1 | S404 IRIDITE WAS S101 CAUSTIC DIP | 12-7 59 | 1001 | VP | JAD | EMN |
| + | + | REDRAWN NO CHANGE | 8-15-55 | | 16 | JAD | WDC |
| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. |
| TOLERANCES | | | SCALE | | | | |
| ALL OTHERS | DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ± | | DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. | | | | |