


MS-Z447 A

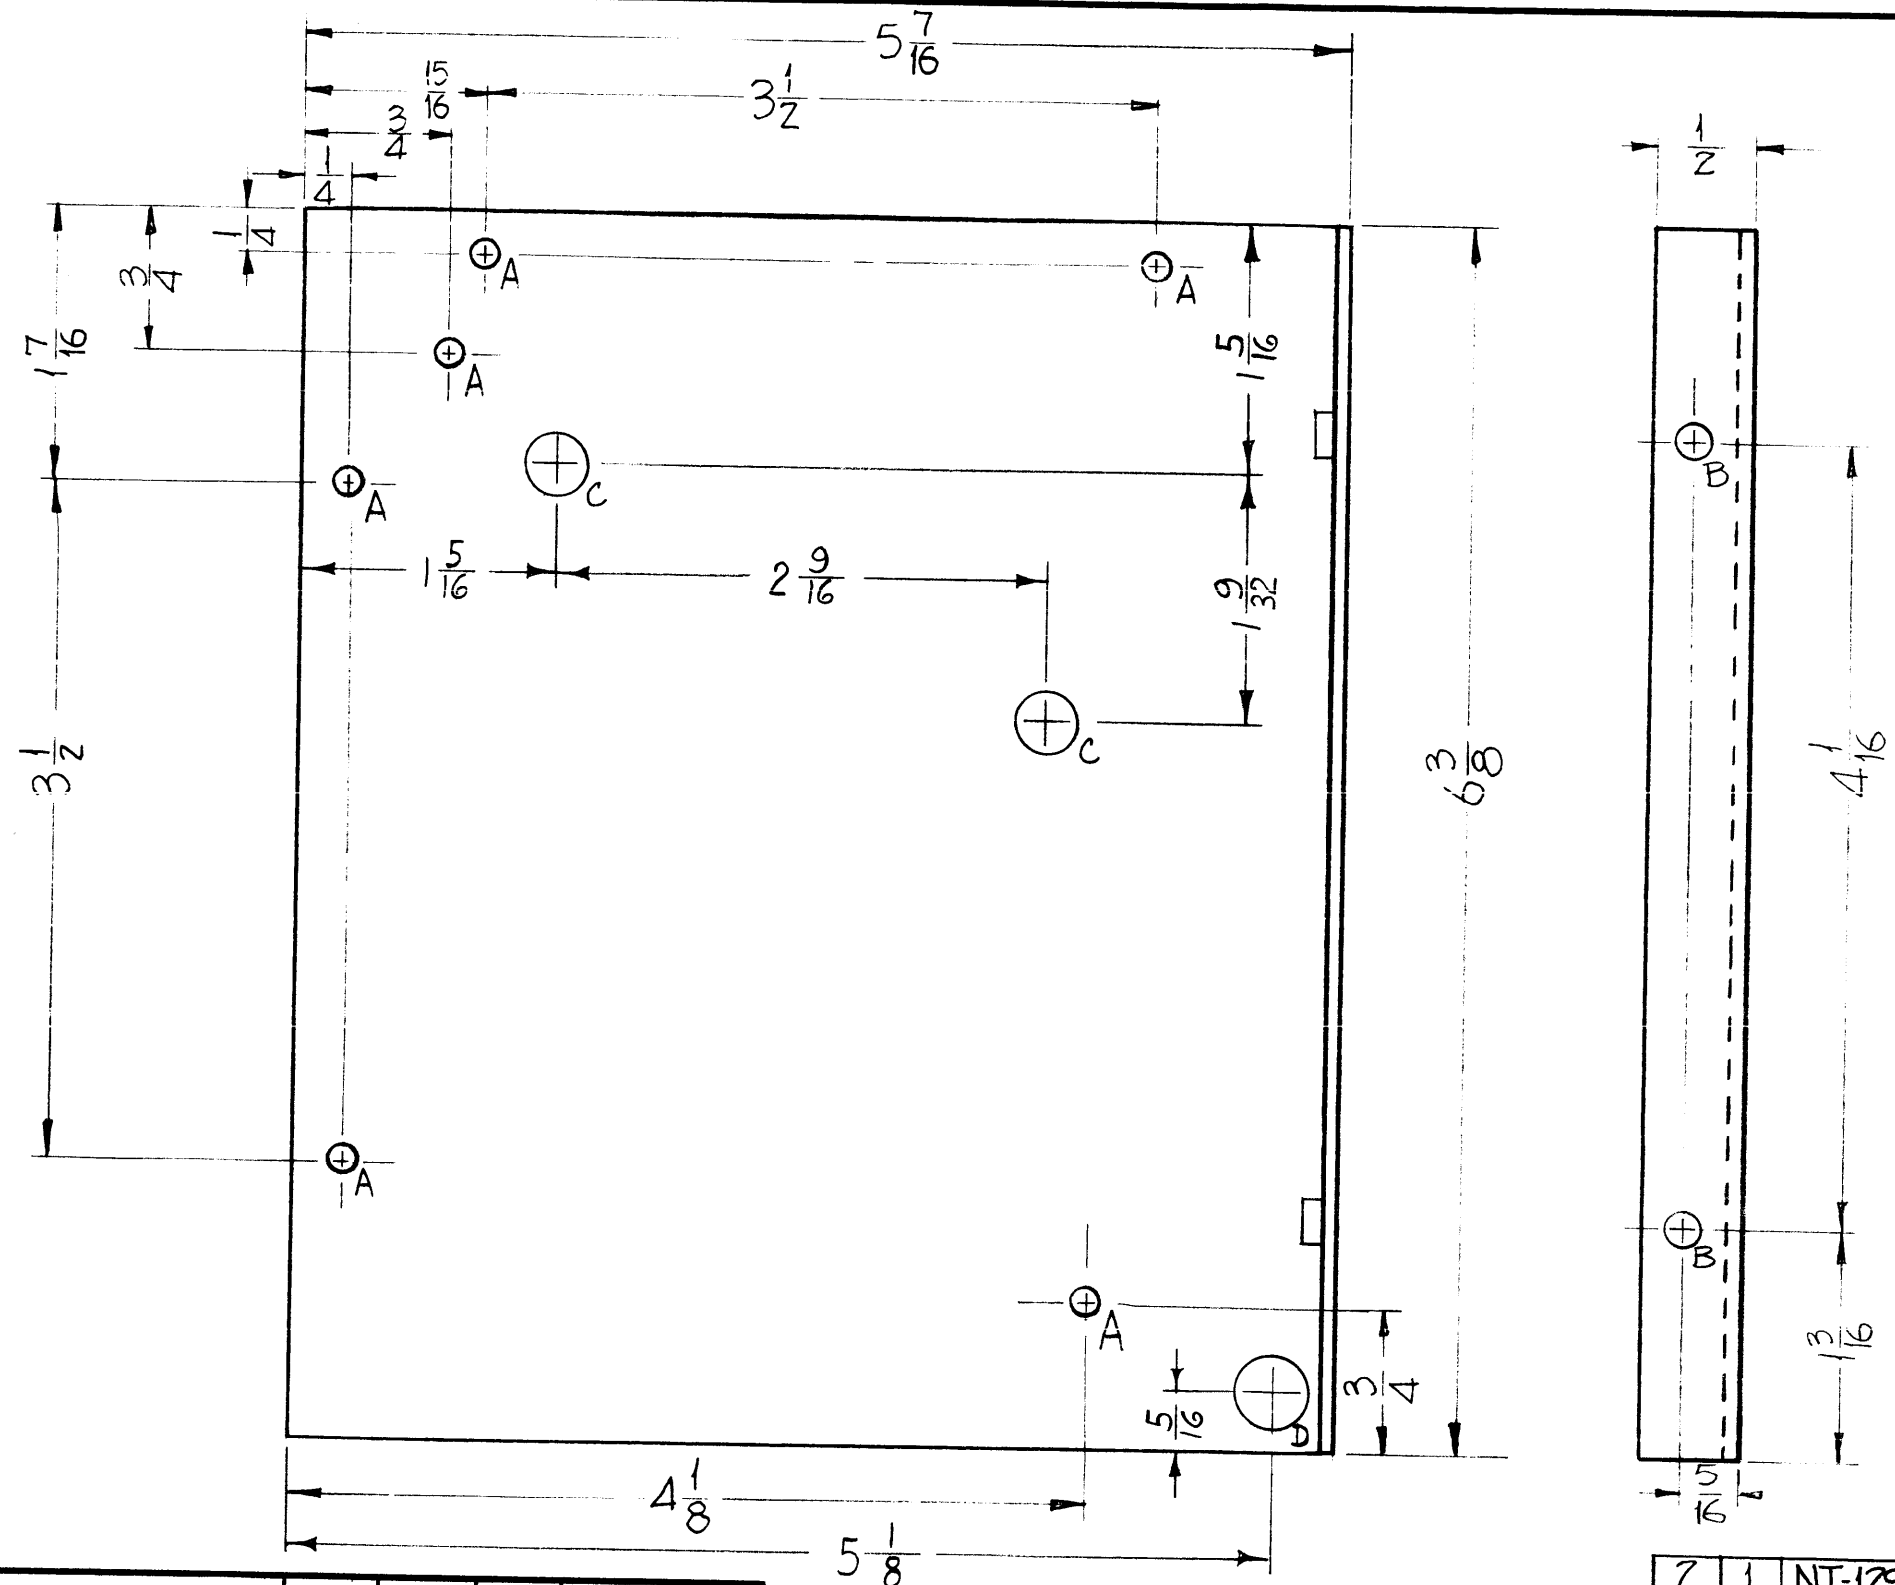

HOLE	REQ
A - 5/32 DIA.	6
B - .191 (for NT-129-632-4)	2
C - 5/16 DIA.	2
D - 3/8 DIA.	1

NOTES -  
 1) Mount Inserts AFTER finishing.  
 2) Use material thickness for Max. Radius ON bend, unless otherwise specified.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	TWO "C" & ONE "D" HOLES ADDED	11-8-60	3433	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE:  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	CHG	OVEN	OVEN/OSC	10/14/60

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT-129-632-4	NUT, SWAGE	
		.064	STOCK SIZE	
		ALUMINUM	MATERIAL	
		5082-H37	TYPE & TEMPER	
		S-404 yellow Iridite	HEAT TREAT. SPEC.	
			FINISH & SPEC. NO.	
			DRAWN	CHECKER
			<i>[Signature]</i>	<i>[Signature]</i>
			FINAL APPROVAL	
			<i>[Signature]</i>	
			MS-Z447 A	