


REQ. PER. UNIT	USED ON			MS-2476	A
	MODEL	ASS'Y. NO.	DATE		
1	GPT-40K	AX-209	11-14-60		

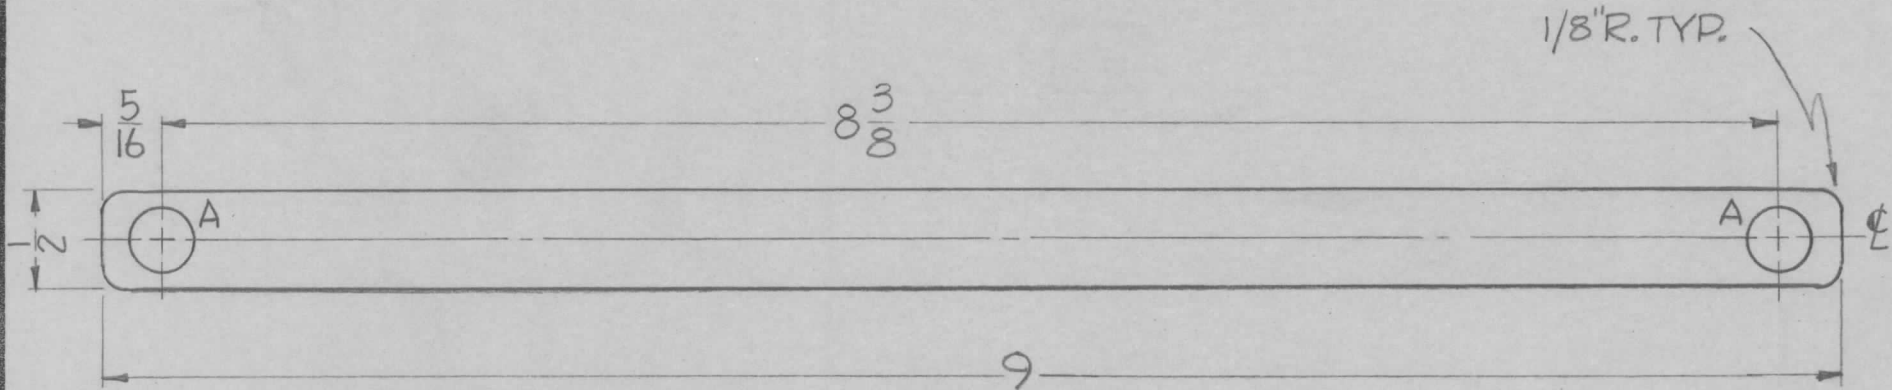

A ~ $\frac{5}{16}$ DIA. 2 REQ.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		
DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE
GUARANTEED
2-66

							REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
									.031 THK	THE TECHNICAL MATERIEL CORP.		
									STOCK SIZE	MAMARONECK, NEW YORK		
									COPPER	STRAP, DIRECTIONAL COUPLER INPUT		
									MATERIAL			
A	2	FINISH WAS GOLD PLATED	5-8-61	4853	WLF	JCS			DDM	a.g.	QJ	
	1	"A" DIA. ADDED										
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
TOLERANCES			SCALE:									
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE				TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
FRAC. DIM. ±			BEEN DETERMINED AND ANY DEVIATIONS				SILVER PLATE &				MS-2476	
ANGULAR DIM. ±			WILL BE CAUSE FOR REJECTION.				CLEAR IRIDITE				A	
			REMOVE ALL BURRS AND SHARP EDGES				FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP		