


REQ. PER. UNIT	USED ON			MS-2493
	MODEL	ASS'Y. NO.	DATE	
1	RAK-9	A-1773	12-15-60	

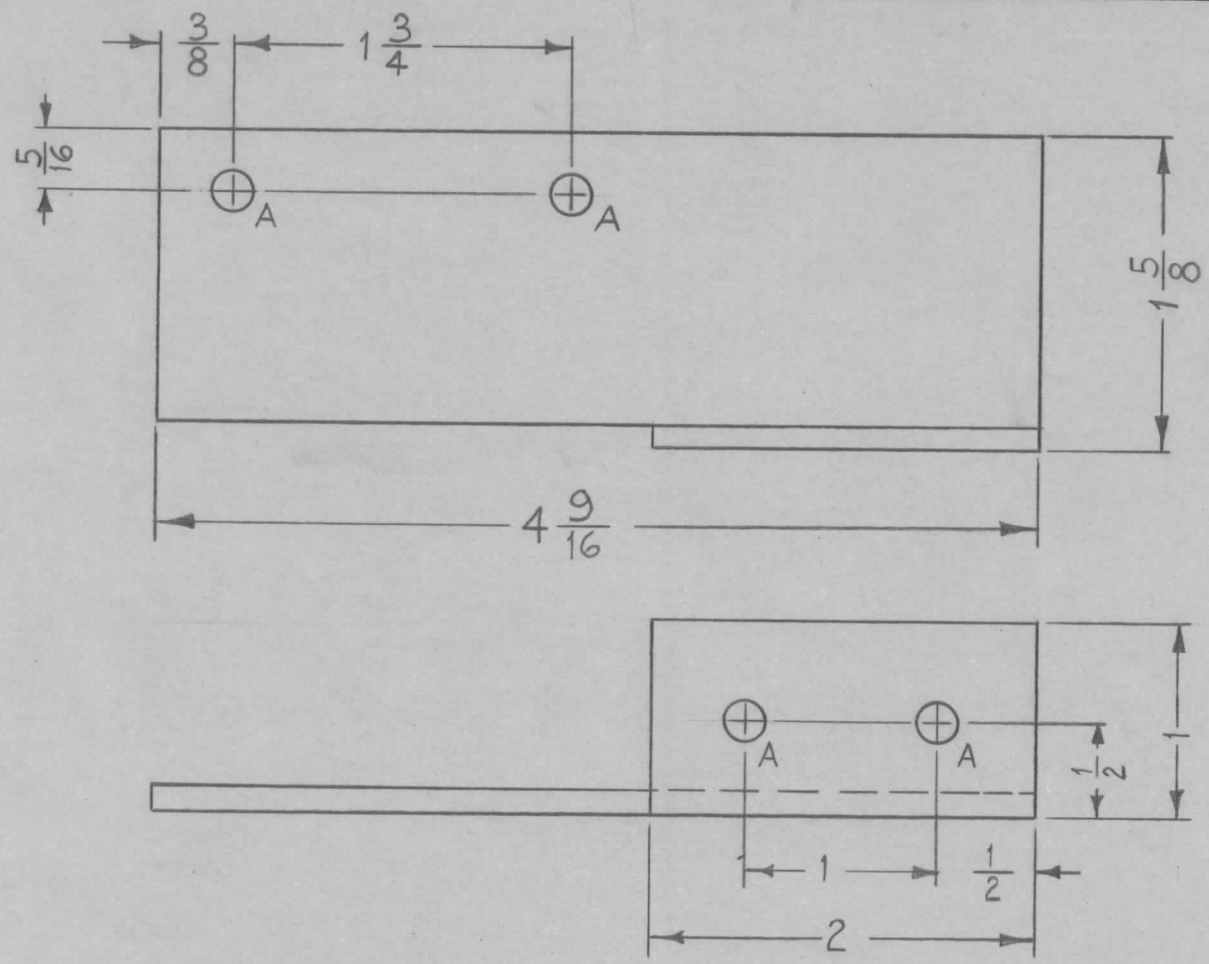

A ~ $\frac{13}{64}$ DIA. 4 REQ.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
								1/8		THE TECHNICAL MATERIEL CORP.	
								STOCK SIZE		MAMARONECK, NEW YORK	
								ALUMINUM		MTG. BRACKET, SPRING MOTOR	
								MATERIAL			
								5052-H32		<i>M.A.F.</i>	<i>J.D.</i>
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
								S404 YELL. IRIDITE		<i>RK</i>	<i>SFM</i>
								FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP
											MS-2493

DEC. DIM. ±
 FRAC. DIM. ± $\frac{1}{64}$
 ANGULAR DIM. ±

SCALE:
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES