


HOLES — A - .253 MAX., .250 MIN. DIA's. FOR MTG. NT 129 1032-6 — 4 REQ.

MS-3062

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
0	ORIGINAL RELEASE FOR PRODUCTION	3-2-64		A.M.		

METAL STAMP TMC PART NO.  
1/8 HIGH GOTHIC.

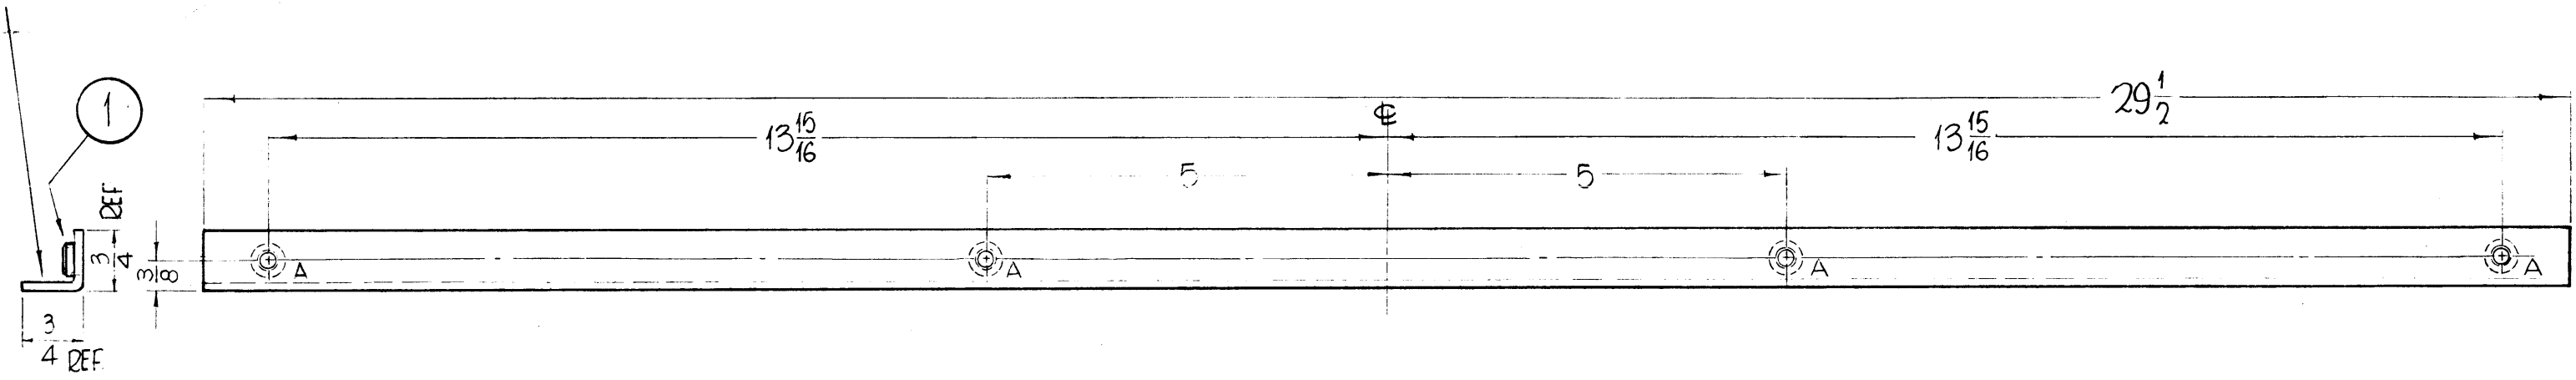

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

NOTES

1	GPT-200K	AP-110
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
	A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

4	1	NT 129 1032-6	NUT, ROUND, SWAGE TYPE	
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. BUDETTI		LIST OF MATERIAL		
MATERIAL		3/4 X 3/4 X 1/8 THICK EXTRUDED ALUMINUM 4		
FINISH		S404 IRIDITE		
TITLE		STIFFNED, FRONT PANEL		
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN John C. Biele DATE 6/25/62		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED [Signature] DATE 11/26/63		
FRACTIONS ± 1/64 ANGLES ± 0° 30'		FINAL APPROVAL [Signature] DATE 2/7/64		
TOLERANCES		MECH. DES [Signature] DATE 2/7/64		
		MS-3062		
		SHEET		
		REV. LTR.		