
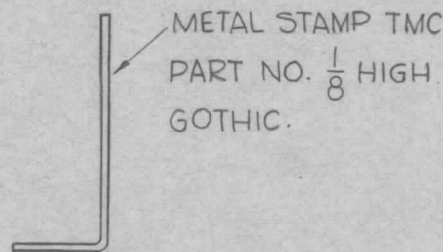
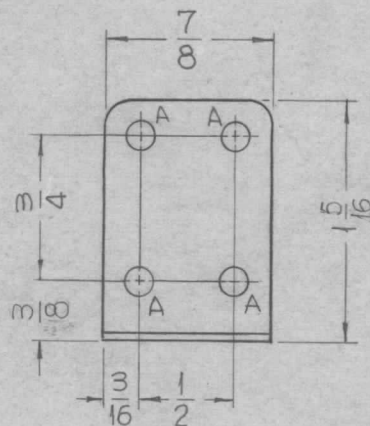


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
7	TER-100K	A-2702	1-8-62
4	GPT-200K	A-2701	4-16-63
2	GPT-200K	A-2703	5-31-63
1	GPT-200K	A-3180	5-31-63
1	GPT10K	HVRB-1	3-12-65
1	GPT10K	HVRC-1	3-12-65

MS-3135 A

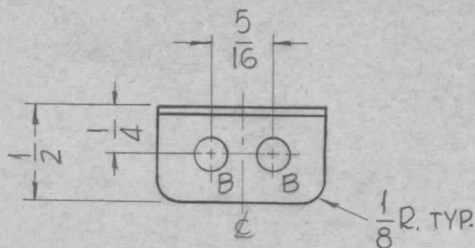

HOLES:

- A - 1/8 DIA. - 4 REQ.
- B - 5/32 DIA. - 2 REQ.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
A	CLERICAL CHANGE (HVRB-1 & HVRC-1 RFF ADDED)	3-12-65		JR	JCS			.051 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, SWITCH MTG.	
0	ORIGINAL RELEASE	5-16-64		JB			ALUMINUM				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE					5052	H-32	SRG	QA	RJC
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	TOLERANCES						S404 YELLOW IRIDITE		JCS	1/2/64	MS-3135 A
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	