THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE		
1	GPT-200K	AX-395	4-24-63	MS-3231	0

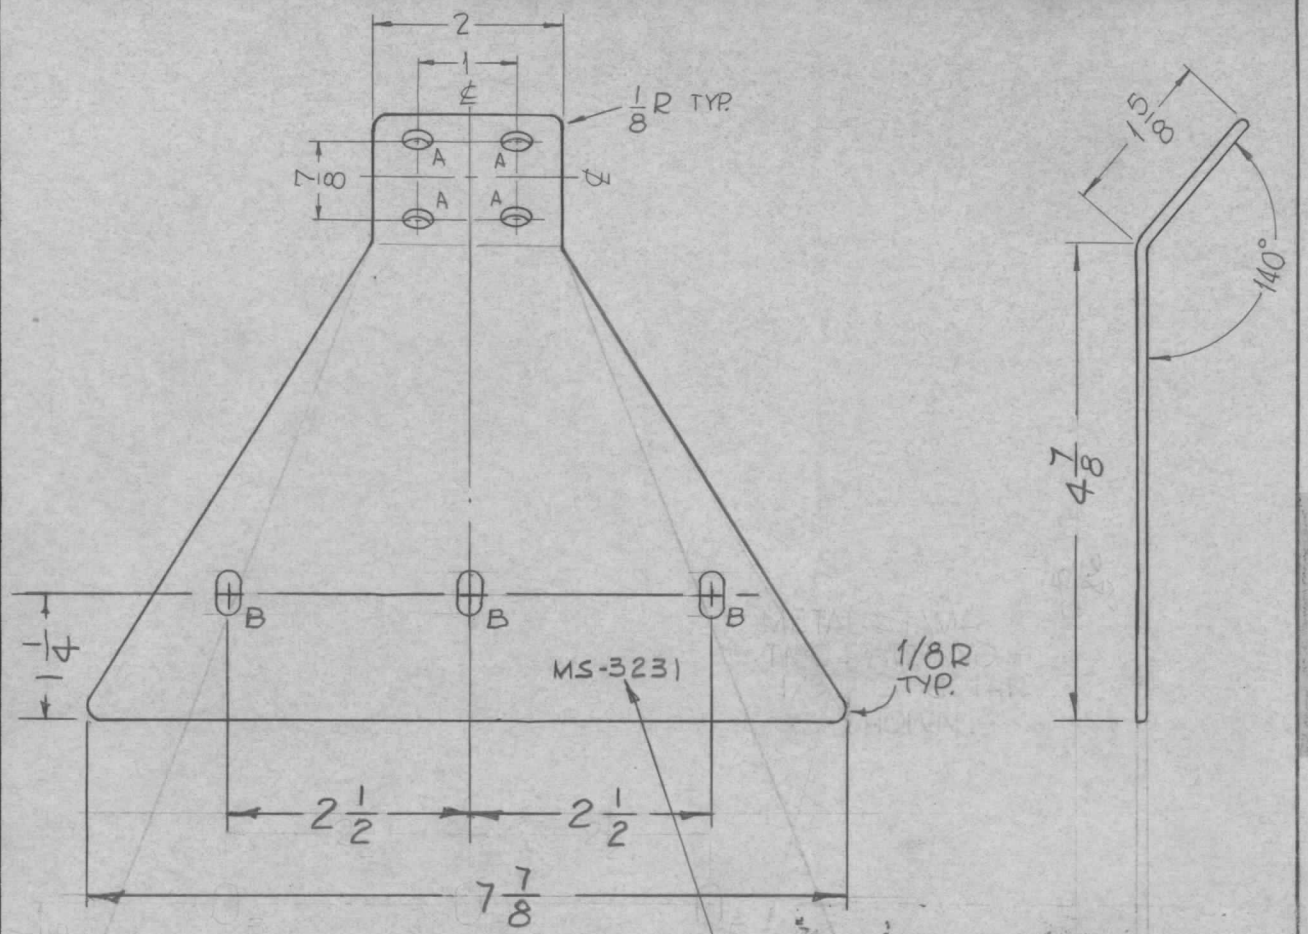

A ~ 15/64 DIA. (4 REQ.)



B-DETAIL (3 REQ.)

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. ROUND ALL EDGES 1/16R
5. POLISH BEFORE PLATING

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIGINAL RELEASE	5.16.64		JB		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30′

SCALE

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

1/8 THICK
STOCK SIZE

H. R. COPPER
MATERIAL

TYPE & TEMPER: S-245 SILVER PLATE, BRIGHT
HEAT TREAT. SPEC.
FINISH & SPEC. NO.

F. BUDETTI

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

PLATE, CONDUCTOR

DRAWN	CHECKED	FINAL APPROVAL
SRG	aa	RDC
ELEC. DES. APP.	MECH. DES. APP.	MS-3231 0
	2/1/64	