


REQ. PER UNIT	USED ON			MS-3295	0
	MODEL	ASS'Y. NO.	DATE		
1	GPT-200K	AR-137	4-16-64		
1	GPT-200K	AR-138	4-16-64		

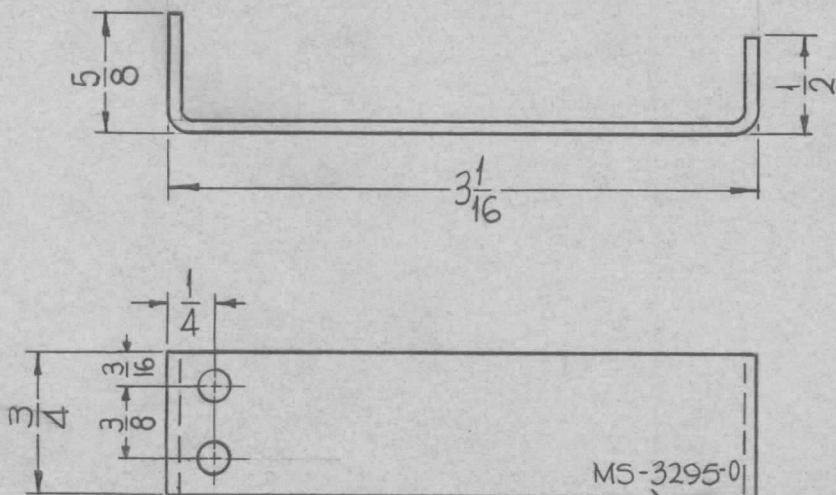

HOLES:  
5/32 DIA. ——— 2REQ.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90°.
  3. REMOVE ALL BURRS AND SHARP EDGES.

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL		
0	ORIGINAL RELEASE FOR PROD.	4-23-64		SRG			.081 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK.				
X2	3/4 WAS 7/8	4-17-64					ALUMINUM		BRACKET, INTERLOCK STOP				
							MATERIAL						
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1"=1"				5052-H32		SRG	aa	Rox		
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A				S-404 YELLOW IRIDITE		<i>[Signature]</i>	4/20/64	MS-3295	0
	TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.			