


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	GPT-200K(A-X-392)	A-3159	7-1-63

MS-3298 0

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC.

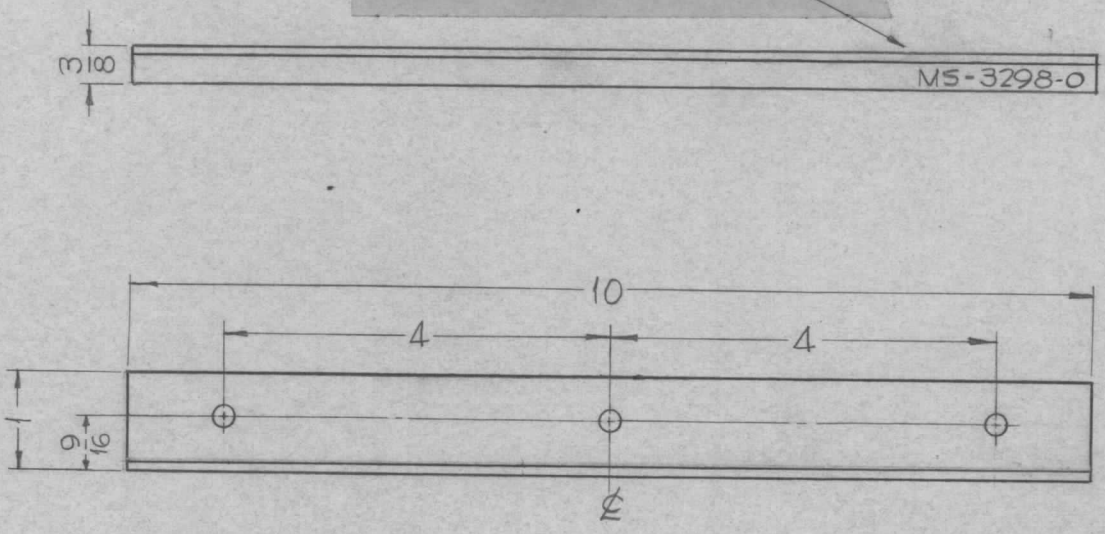

HOLES:  
13/64 DIA. (3REQ.)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90°.
  3. REMOVE ALL BURRS AND SHARP EDGES.

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
	.081 THICK		THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE		MAMARONECK, NEW YORK	
	ALUMINUM		BRACKET, XFMR SUPPORT	
	MATERIAL			
	5052-H32	SRG	aa 803 RJC	4-7-64
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
	S-404 YELLOW IRIDITE		DRB	MS-3298 0
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1/2

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005

FRACTIONS: ± 1/64, ANGLES: ± 0° 30'

TOLERANCES

CODE A