


REQ. PER UNIT	USED ON			MS5019	Q
	MODEL	ASS'Y. NO.	DATE		
2	RAK110-2	BMA156	7-27-66		

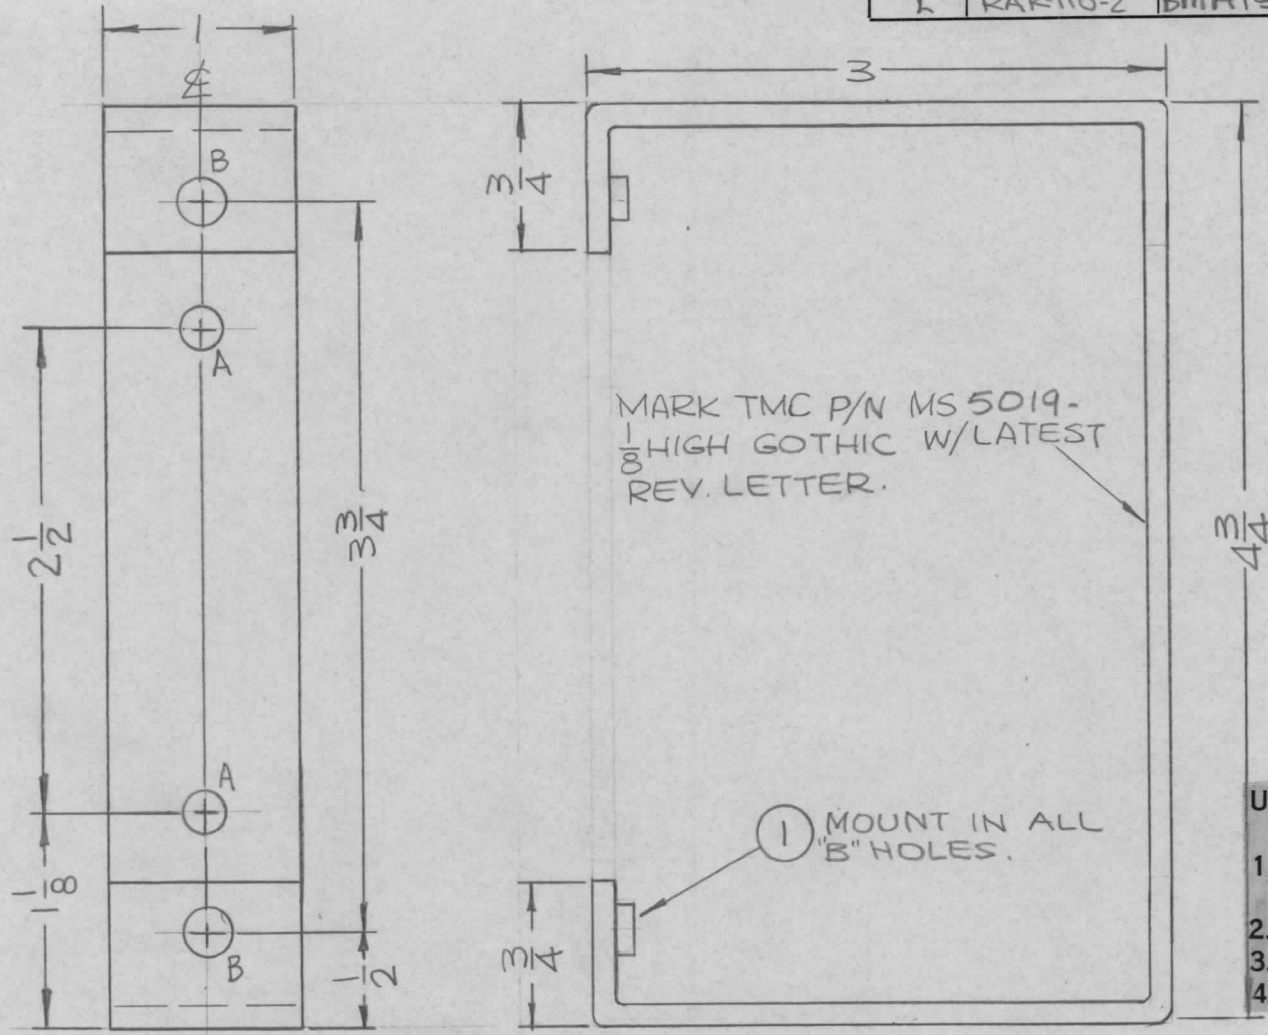

HOLES:
 A - 15/64 DIA. (2 REQ.)
 B - .250-.253 DIA. (2 REQ.)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

ORIGINAL RELEASE FOR PRODUCTION		12.1.66	11-19-66	WAD			2	1	NT129-1032-6	NUT, PLAIN, SPLINE	B	
X1	"B" HOLES WERE .251-.254	11-19-66	VAM	Jc					1/8 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		
X	EXP. RELEASE	7-27-66	X						ALUMINUM	BRACKET MTG. TERMINAL BOX		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			5052-H32			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1							TYPE & TEMPER	HEAT TREAT. SPEC.	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A			S404 YEL. IRIDITE			
									FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS5019 Q