
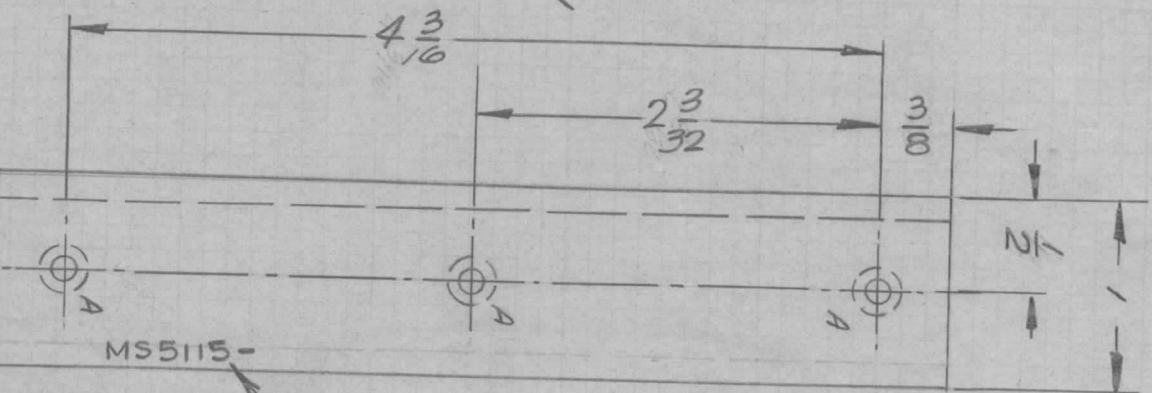


- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

NOTES

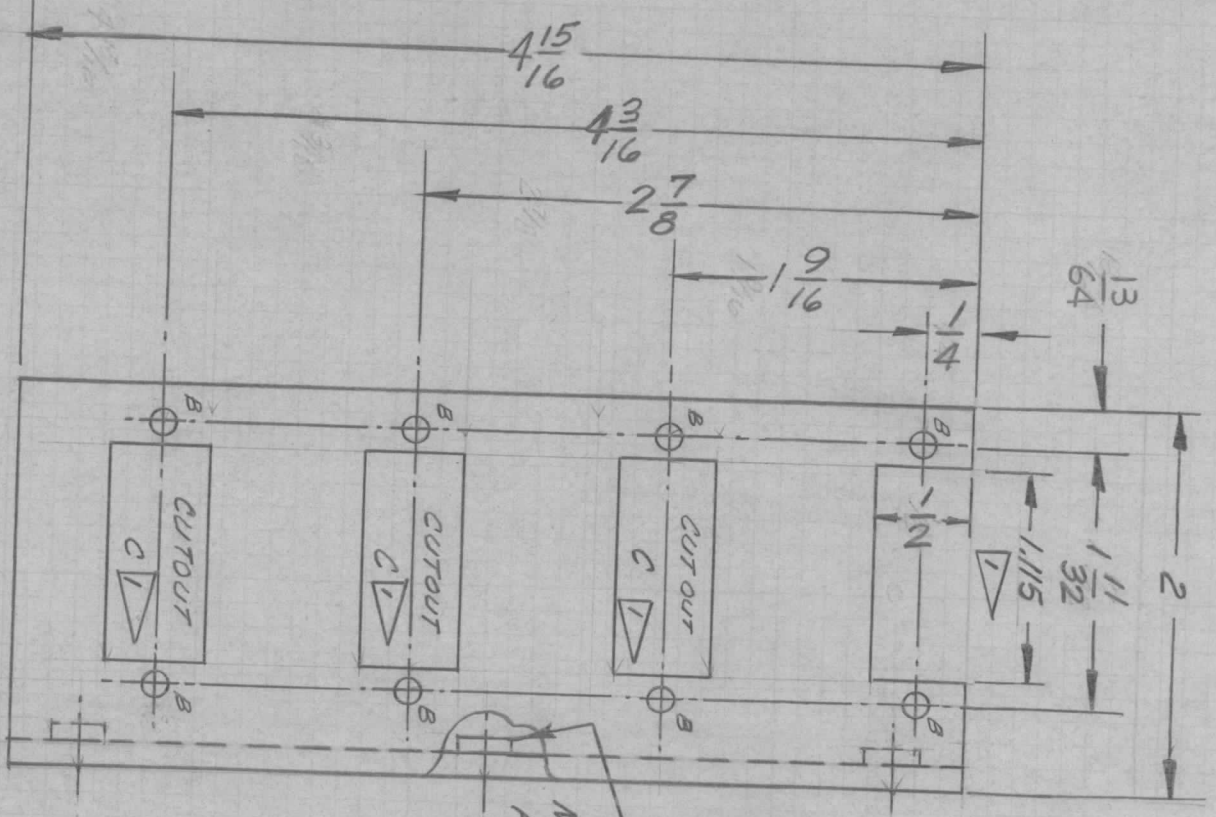

MS5115

REVISIONS		DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL Release	5/11/67	7	W	W	W
Ø	ORIGINAL RELEASE FOR PROD	8/4/67	Ø	Ø	Ø	Ø

HOLE	DESCRIPTION	REQ
A	.191 - .194 DIA.	3
B	9/64 DIA.	8
C	1.115 x 1/2 RECT. CUTOUT	3

POSITION CUTOUT ON CENTERLINE OF RESPECTIVE HOLES

MARK TMC PT. NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER

REF: LD 2234

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
3	1	NT129-G32-G	NUT, PLAIN, SPLINE	A
A. MARTINENGO				

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

PLATE, CONNECTOR

UNLESS OTHERWISE SPECIFIED	DECIMALS	TOLERANCES	FRACTIONS	MECH. DES.	DATE	FINAL APPROVAL	DATE
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	.X ± .05 .XX ± .01 .XXX ± .005		± 1/64 ANGLES ± 0° 30'	EDL	8-4-67	WPM	
UNLESS OTHERWISE SPECIFIED				MECH. DES.	DATE		
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							

QTY./UNIT	MODEL USED ON	ASSY. NO.
1	WRC-1	5401-451
SCALE		
FULL	A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.