


| MC P/N | A | B | C | D | E | F | G | H | J | K | L | MATERIAL |
|----------|---------|-------|-------|---|--------|-------|-------|-------|--------|--------------|-----------|--------------------|
| MSS148-1 | 3 | 1 | 1 | — | 15/16 | 1/4 | 7/16 | 11/16 | 1-1/2 | 11/64 | 11/64 | 1/8 ALUM 5052-H32 |
| -2 | 4 | 3-5/8 | 1-1/2 | — | 3-1/2 | 11/16 | 2-1/8 | 1-1/8 | 1-3/4 | 13/64 | 13/64 | 1/8 ALUM 5052-H32 |
| -3 | 2-1/2 | 3-1/4 | 1 | — | 1-1/2 | 5/16 | 13/16 | 5/8 | 1-3/16 | 5/16 x 1/2 | 1/4 x 1/2 | .081 ALUM 5052-H32 |
| -4 | 1 | 19/32 | 1/2 | — | 6-1/4 | 1-1/8 | 4 | 5/16 | — | NT129-0632-4 | — | 1/8 ALUM 5052-H32 |
| -5 | 1-11/16 | 4-3/4 | 1 | — | 3-3/4 | 3/8 | 3 | 9/16 | 5/16 | 15/64 | 15/64 | .064 ALUM 5052-H32 |
| -6 | 1 | 5/8 | 1/2 | — | 14-3/4 | 3/8 | 14 | — | 1/4 | 11/64 | — | .064 ALUM 5052-H32 |
| -7 | 1 | 5/8 | 1/2 | — | 15-3/4 | 3/8 | 15 | — | 1/4 | 11/64 | — | .064 ALUM 5052-H32 |

| REVISIONS | DESCRIPTION | DATE | E.M.N.NO | DRAFT | CHKD | APPD |
|-----------|------------------------------------|---------|----------|-------|------|------|
| X1 | (REDRAWN FROM SIZE)-2ADD | 9-22-67 | | H.G. | | |
| Ø | ORIG. RELEASE FOR PROD | 9-22-67 | | RG. | | |
| A | ADDED, DASH-345 | 5-21-69 | 10442 | GE | | FB |
| B | MSS148-6, -7 ADDED | 10/1/70 | 20149 | CV | | PK |
| C | MSS148-5, H WAS 7/8, C WAS 7/8 | 7/19/72 | 20805 | EK | | EG |
| D | MSS148-5, A WAS 1-11/16, J WAS 316 | 2/3/78 | 21623 | DEB | | K.P. |

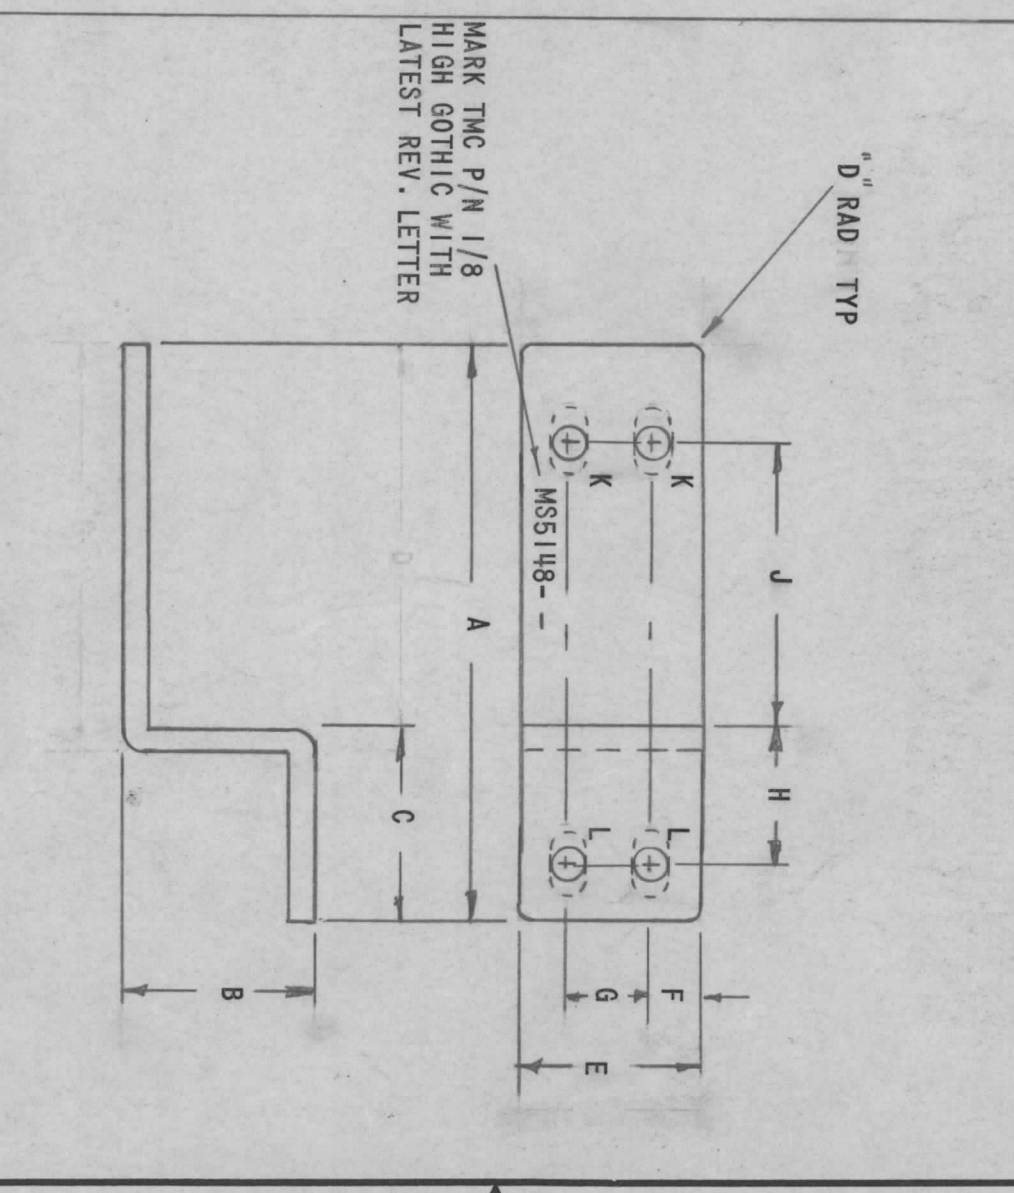

| | | | |
|----------------|-------------|------------------------------|-----------------|
| REQ'D ITEM | PART NUMBER | DESCRIPTION | SYM. |
| F. BUDETTI | | BRACKET, MOUNTING | |
| FINAL APPROVAL | DATE | LIST OF MATERIAL | |
| MECH. DES. | DATE | THE TECHNICAL MATERIEL CORP. | |
| ELECT. DES. | DATE | MAMARONECK, NEW YORK | |
| CHECKED | DATE | BRACKET, MOUNTING | |
| DRAWN | DATE | SIZE | CODE IDENT. NO. |
| H.G. | 9-22-67 | B | 82679 |
| | 5-22-67 | SCALE | DWG NO. |
| | | | MS 5148 |
| | | SHEET | ISSUE |
| | | OF | D |

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

| | | |
|------------|---------------|-----------|
| QTY / UNIT | MODEL USED ON | ASS'Y NO. |
| | STANDARD | |
| | APPLICATION | |
| | CODE | S401-451 |

| | |
|-------------|-----------|
| DECIMALS | FRACTIONS |
| .X ± .05 | 1/64 |
| .XX ± .01 | ANGLES |
| .XXX ± .005 | 90°-30' |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SEE CHART