


REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X1	EXP. RELEASE	1/9/68	-	Exp	MS	MS
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/1/68	Ø	MS	MS	MS

MS5160 Ø	
----------	--

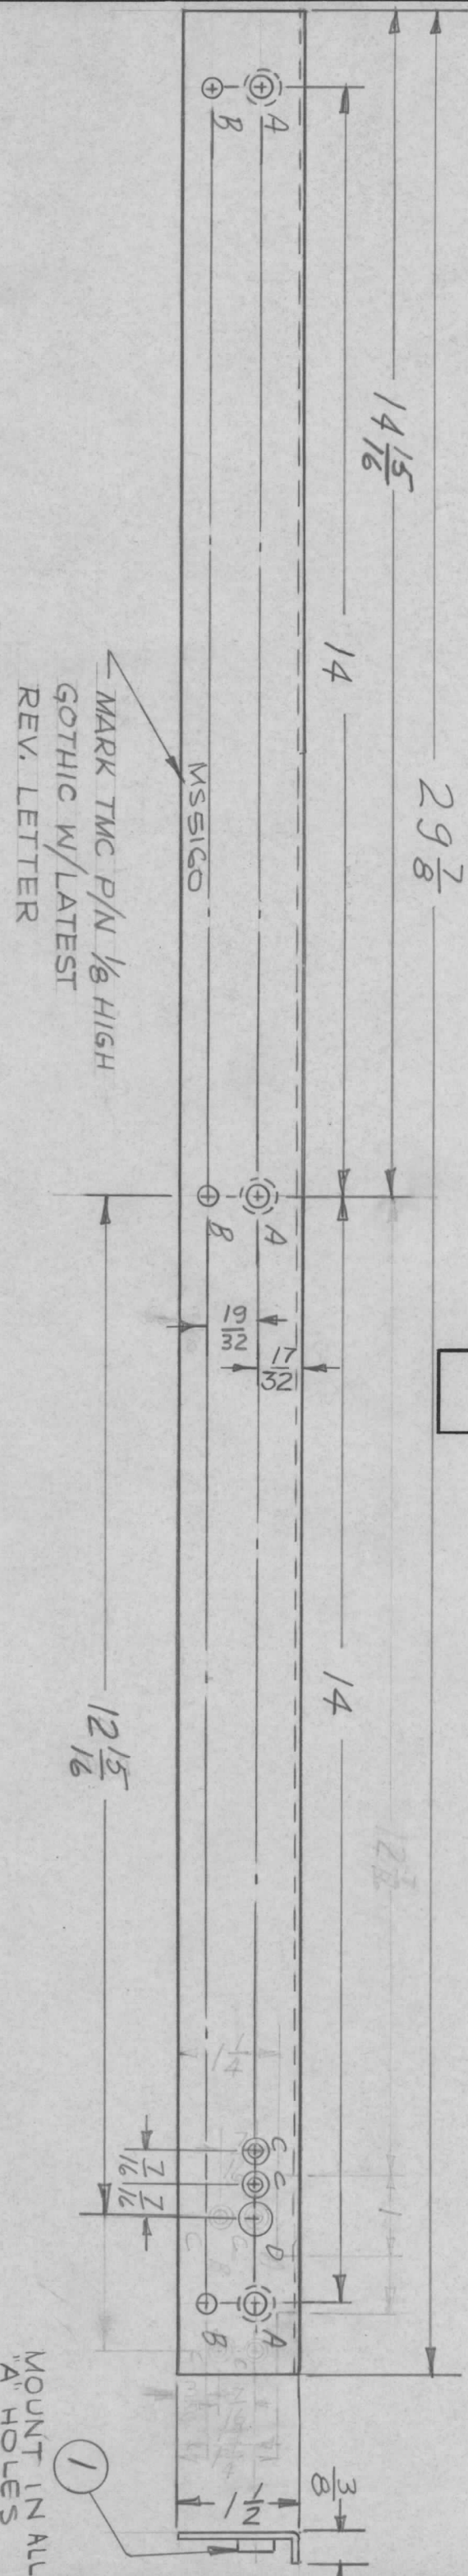

HOLE	DESCRIPTION	REQ.
A	.221 - 224 DIA.	3
B	13/64 DIA.	3
C	.144 DIA. SINK 82° TO .284	2
D	3/8 DIA.	1

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

QTY./UNIT	1	MODEL USED ON	BCT10KA	ASS'Y. NO.	
SCALE		CODE	A	S401-451	

REQ'D.	3	ITEM	1	PART NUMBER	NT129-Ø32-4	DESCRIPTION	NUT, PLAIN SPLINE	SYMBOL	A
MATERIAL .081 ALUMINUM									
FINISH S404 YELLOW IRIDIUM									
TITLE BRACKET, SHIM									
LIST OF MATERIAL MS3290 - MS1006									
THE TECHNICAL MATERIEL CORP.									
MAMARONECK, NEW YORK									
DRAWN	DATE	CHECKED	DATE	ELECT. DES.	DATE	MECH. DES.	DATE	FINAL APPROVAL	DATE
	3/26/67		4-1-68				4-2-68	MS5160	4-3-68
									REV. LTR.