

APPLICATION

QTY	MODEL USED ON	ASSY NO.	LTR
2	BMA 455	AX 5125	Ø


DESCRIPTION
ORIGINAL RELEASE

REVISIONS

DATE	E.M.N.NO	DRAFT	CHKD	APPD
3/15/71		CU.		GEA

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

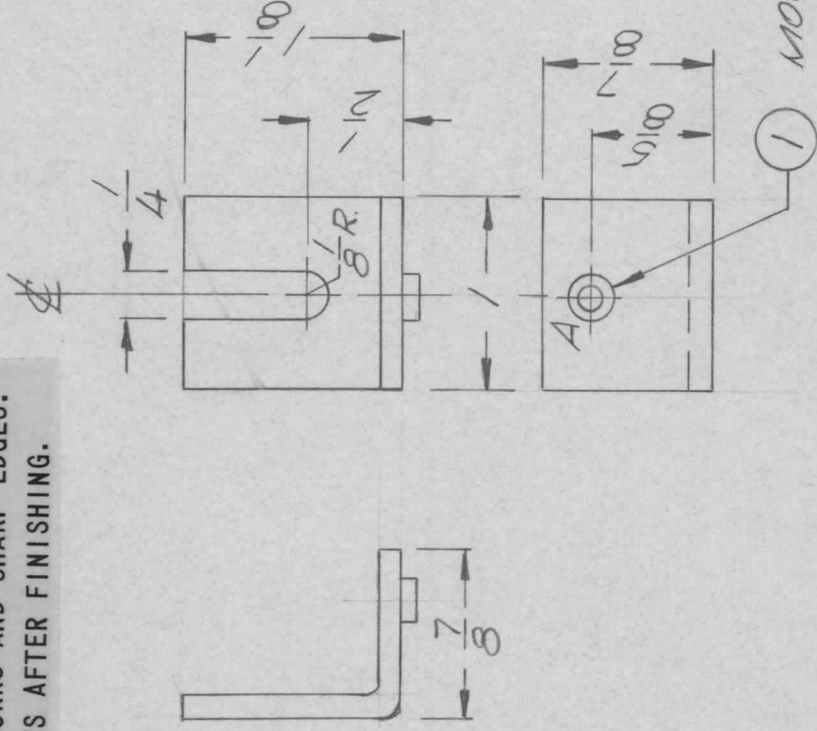

HOLE A - .250 - .254 DIA. - 1 REQ.

1	1	NT129-1032-4	NUT PLW SWAGE	SYM.
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
BRKT, COV MTG				
SIZE A				
CODE IDENT. NO. MS5957				
DWG NO. MS5957				
SCALE 1:1				
SHEET				OF

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES
DECIMALS .X ± .05
XX ± .01
.XXX ± .005
FRACTIONS 1/64
TOLS. ANGLES 0° - 30'
MATERIAL .081 ALUM
5052 H32
FINISH S404
YEL. IRIDITE

REQ'D ITEM	PART NUMBER	DESCRIPTION
F.B.		
FINAL APPROVAL	DATE	
Mech. DES.	10/15/71	
ELECT. DES.	3/10/71	
CHECKED	DATE	
DRAWN	DATE	
GE	3/9/71	

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.