
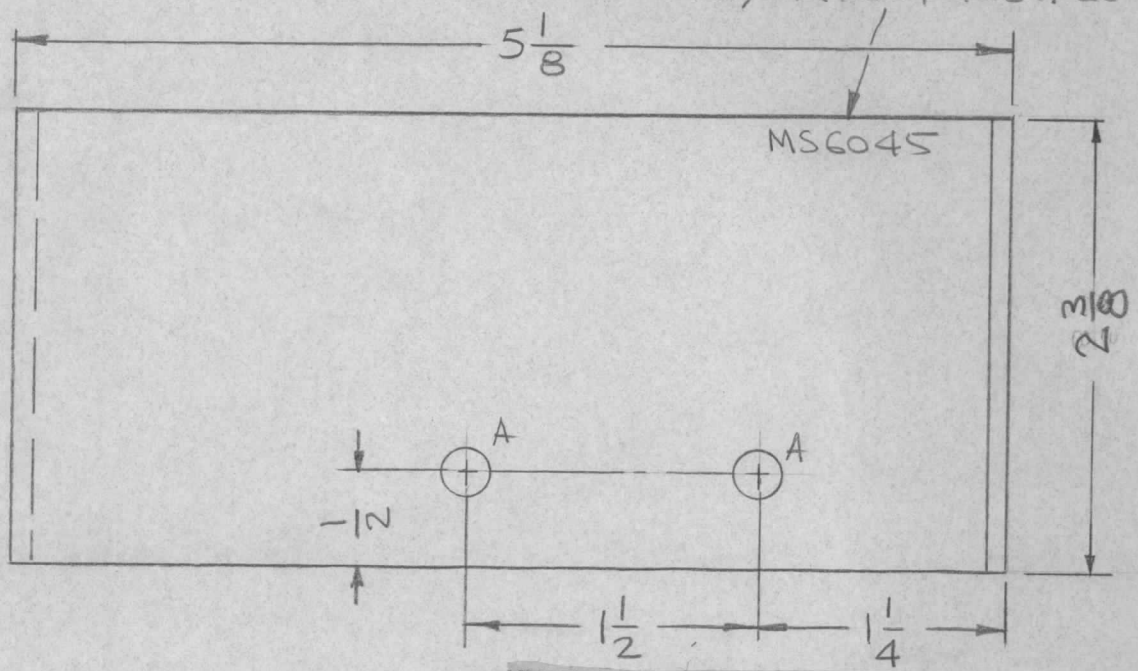


REQ. PER UNIT	USED ON		MSG045 A
	MODEL	DATE	
2	RAK-110-2	12-5-66	

HOLES:  
A - 15/64 DIA. (2 REQ.)

MARK TMC PN  
1/8" HIGH GOTHIC  
W/LATEST REV. LETTER.

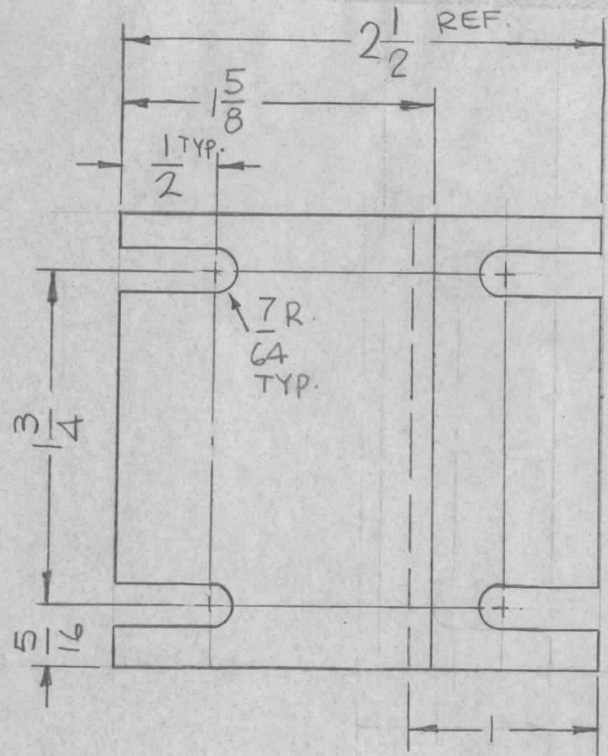

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES

A	ADD DIM 2 3/8	2-6-69	19244	GE	JDe	FB	1/8 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK BRACKET, MTG PLATE
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-1-67		WHD			STOCK SIZE	
X	EXP. RELEASE	12-5-66					ALUMINUM	
							MATERIAL	
TOLERANCES		SCALE: 1:1		5052-H32		TYPE & TEMPER		DRAWN: JDe 2/28/67 CHECKED: [Signature] FINAL APPROVAL: [Signature]
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		S404 YEL IRIDITE		HEAT TREAT. SPEC.		
				FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.		MSG045 A