

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRDUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT  
1

MODEL  
TTG-2


USED ON

ASS'Y. NO.

DATE

5-3-62

NP-458 B

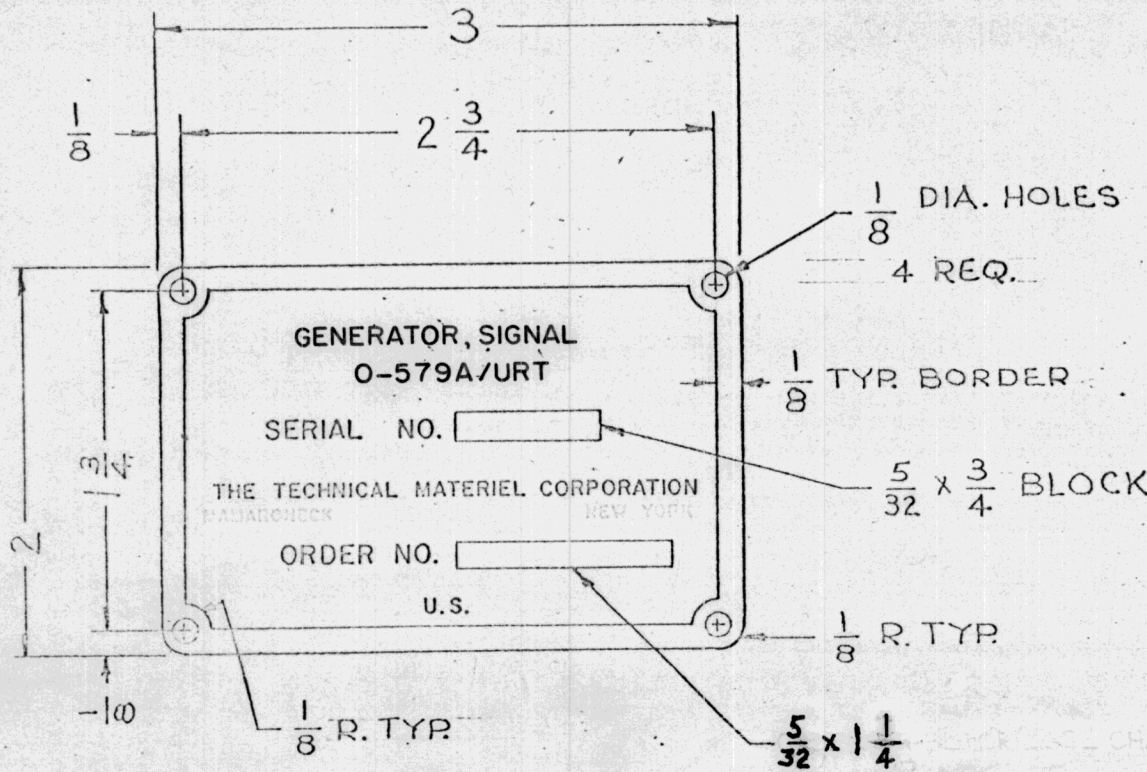

FINISH:  
REVERSE ETCH, ANODIZE ON LUSTERLESS  
BLACK BACKGROUND (TYPE 37038 )  
PER FED. STD. NO. 595  
COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER  
WILL BE STEEL STAMPED BY T M C.

IF THE ORDERING REQUIREMENT IS  
SUFFICIENTLY LARGE, CROSS REFERENCE  
SHALL BE STAMPED BY VENDOR IN LINE  
OF ORDER NUMBER BLOCK (SEE CHART  
FOR PROPER NUMBER).

NAMEPLATE TO BE IN ACCORDANCE WITH  
MIL-STD-130 AND MIL-M-13231A & AMENDS  
(REF: SIGNAL CORPS)

ORDER NO.	12-3-64	13034	82	82	COO
ORDER NO.	72864	11955	82	@	COO

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
B		.032	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
		STOCK SIZE				
A		ALUMINUM	NAMEPLATE, IDENTIFICATION			
		MATERIAL	MODEL TTG-2			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°	SCALE:	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
		5052-H32			P.S	file
		TYPE & TEMPER	HEATTREAT.SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		SEE NOTE			46	NP-458 B
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		