


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	AX-263	GPT-401K	5-3-62

NP-471A

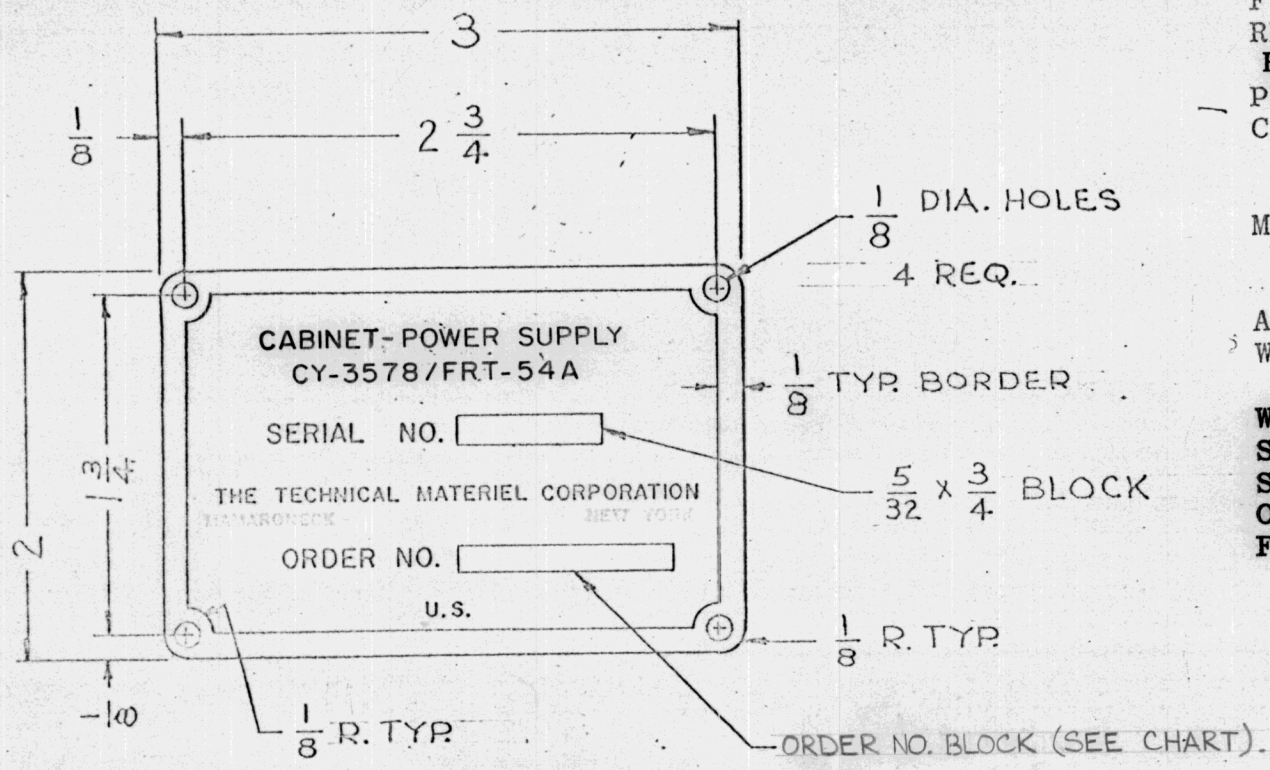

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS
BLACK BACKGROUND (TYPE 37038)
 PER FED. STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER
 WILL BE STEEL STAMPED BY T M C.

OR
 WHERE PURCHASING REQUIREMENT IS
 SUFFICIENTLY LARGE, ORDER NUMBER
 SHALL BE ETCHED BY VENDOR IN LIEU
 OF ORDER NUMBER BLOCK (SEE CHART
 FOR PROPER NUMBER).

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-471-1	5/32 X 1-1/8 Block	No Order Number
NP-471-2	No Block	18002-PP-62

NAMEPLATE TO BE IN ACCORDANCE WITH
 MIL-STD-130 AND MIL-M-13231A
 (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.032	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE		
A	MAMIK, N.Y. DELETED ON PICTORIAL	72862 11955	ALUMINUM	NAMEPLATE, IDENTIFICATION
			MATERIAL	MODEL AX-263
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS
			CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE:		
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		
TOLERANCES ON				
FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°				
		250	φ.S	
		TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN
		SEE NOTE		CHECKED
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
				NP-471A