


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT 1	MODEL	USED ON	DATE
	AP-105	GPT-40K	5-3-62

NP-476 | A

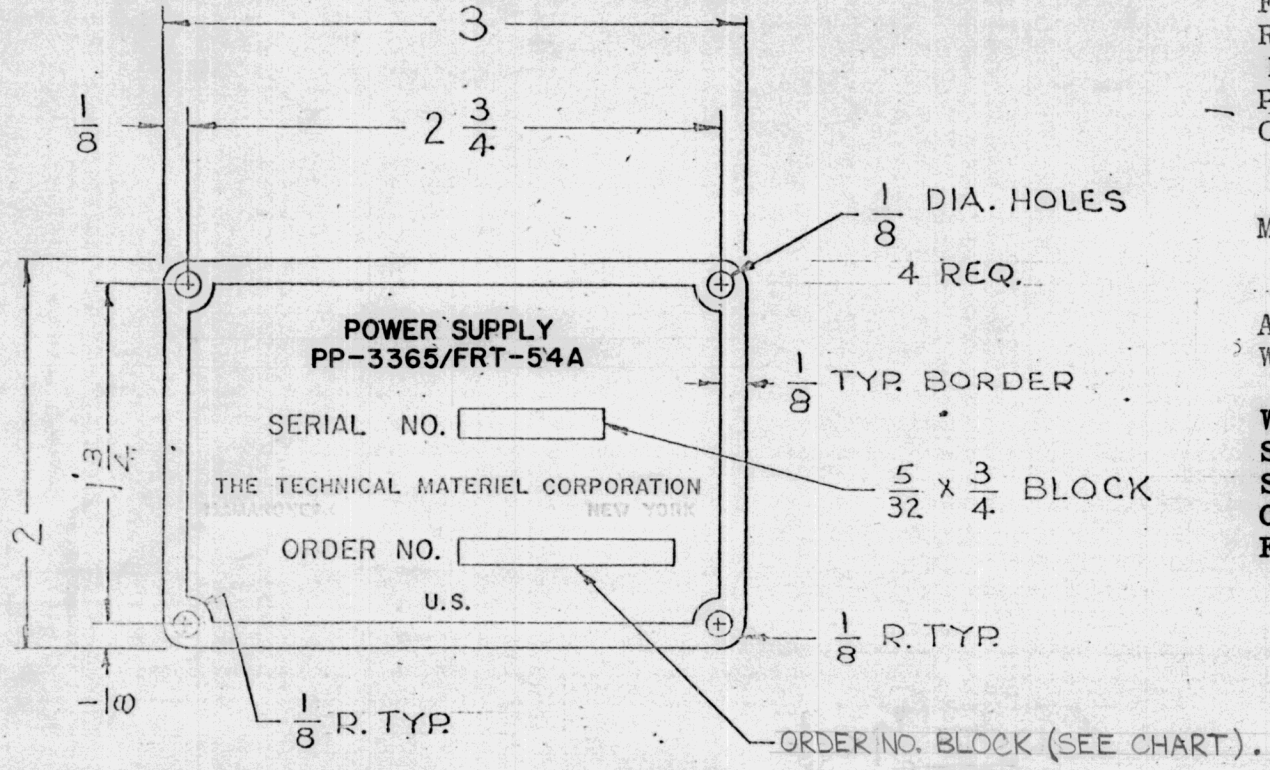

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS
BLACK BACKGROUND (TYPE 37038)
 PER FED. STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER
 WILL BE STEEL STAMPED BY T M C.

OR
 WHERE PURCHASING REQUIREMENT IS
 SUFFICIENTLY LARGE, ORDER NUMBER
 SHALL BE ETCHED BY VENDOR IN LIEU
 OF ORDER NUMBER BLOCK (SEE CHART
 FOR PROPER NUMBER).

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-476-1	5/32 X 1-1/8 Block	No Order Number
NP-476-2	No Block	18002-PP-62

NAMEPLATE TO BE IN ACCORDANCE WITH
 MIL-STD-130 AND MIL-M-13231A
 (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
		.032	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
		ALUMINUM	NAMEPLATE, IDENTIFICATION		
		MATERIAL	MODEL AP-105		
A	MAM'K, N.Y. DELETED ON PICTORIAL	728-64 11955	P.S.	FILE	
SYM	DESCRIPTION	DATE CH. NO. DRAFTS CHECKER ENG. APP.	DRAWN	CHECKED	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. ± 1/64 DEC. ± .003 ANGLES ± 1/2°		SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES	TYPE & TEMPER	HEATTREAT. SPEC.	FINAL APPROVAL
		2SO	SEE NOTE	46	NP-476 A
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	