


|               |         |            |         |       |   |
|---------------|---------|------------|---------|-------|---|
| REQ. PER UNIT | USED ON |            |         | NP723 | Ø |
|               | MODEL   | ASS'Y. NO. | DATE    |       |   |
| 1             | VLRA-1  |            | 12-4-64 |       |   |

FINISH -  
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK  
 BACKGROUND. (TYPE 37038) PER-FED-STD-595.  
 COLORLESS VARNISH PER MIL-V-6894.

MIN LETTER HEIGHT 3/64".

ORDER & SERIAL NUMBERS TO BE STEEL  
 STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH  
 MIL-STD-130 & MIL-M-13231 & AMENDS.

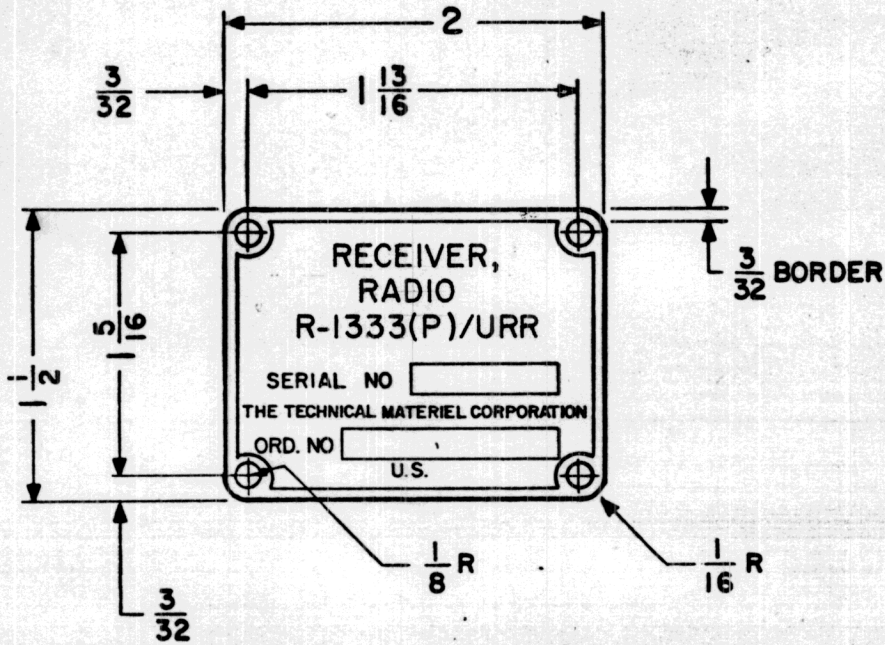

4 HOLES - 1/8 DIA.  
 SERIAL BLOCK - 5/32. x 3/4  
 ORDER BLOCK - 5/32 x 1-1/8

| REQ.  | ITEM                            | PART NO.           | DESCRIPTION                  |   |                    |                    | SYMBOL |
|---|---------------------------------|--------------------|------------------------------|---|--------------------|--------------------|--------|
|   |                                 | .032 THK.          | THE TECHNICAL MATERIEL CORP. |   |                    |                    |        |
|   |                                 | STOCK SIZE         | MAMARONECK, NEW YORK         |   |                    |                    |        |
| Ø   | ORIGINAL RELEASE FOR PRODUCTION | 12-7-64            | Ø                            | g.l.                                      |                    |                    |        |
| X   | EXPER. RELEASE                  | 12-4-64            | X                            | <i>[Signature]</i>                        |                    |                    |        |
| SYM   | DESCRIPTION                     | DATE               | CH. NO.                      | DRAFTS                                    | CHECKER            | ENG. APP.          |        |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES |                                 | SCALE              | 1:1                          |   |                    |                    |        |
|   |                                 | 5052-H32           | <i>[Signature]</i>           | <i>[Signature]</i>                        | <i>[Signature]</i> | <i>[Signature]</i> |        |
|   |                                 | TYPE & TEMPER      | HEAT TREAT. SPEC.            | DRAWN                                     | CHECKED            | FINAL APPROVAL     |        |
| DECIMALS<br>.X ± .05<br>.XX ± .01<br>.XXX ± .005  |                                 | TOLERANCES         |                              | FRACTIONS<br>± 1/64<br>ANGLES<br>± 0° 30' | CODE<br>A          |                    |        |
|   |                                 | SEE NOTE           |                              |   |                    |                    |        |
|   |                                 | FINISH & SPEC. NO. | EC. DES. APP.                | MECH. DES. APP.                           |                    |                    |        |
|   |                                 |                    |                              |   |                    | NP723              |        |