


TMC PT. NO.	STYLE	USE WITH METER CHARACTERISTICS			REQ. PER UNIT	USED ON		
		METER R	METER I	METER E		MODEL	ASS'Y. NO.	DATE
					1	GPT-10K	A4236	NW126 Ø
NW126-1	H	1000 Ω	200 μA	.200 V				
NW126-2	L	46 Ω	1 mA	.046 V				

- SPECIFICATIONS -

OPERATING TEMP. RANGE: -65° TO +100°C  
 RESPONSE TIME: 3 NANOSECOND MAX.  
 RECOVERY TIME: 3 NANOSECOND MAX.  
 INTERNAL RESISTOR: 0.6 % METER RES. MAX.  
 POLARITY: NONE  
 CASE: PLASTIC, EPOXY SEAL  
 TERMINAL: INSULATED, TINNED STRANDED COPPER

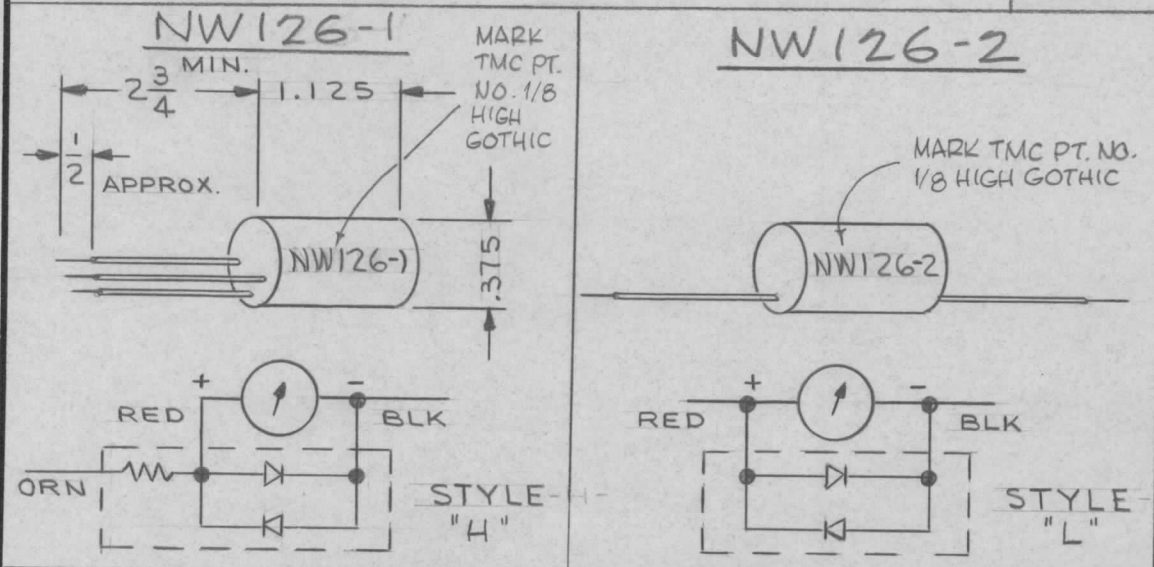

FOR MTG: CU102-5

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL								
			<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK, NEW YORK									
			NETWORK, METER PROTECTIVE VOLTAGE SENSITIVE									
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/19/65	JL									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE								J.L. 4/15/65	JCB	M. R. H. 4/20/65
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	S401-373 (MP-9000)						FRD 4-20-65	4/20/65	NW126 Ø
	TOLERANCES						FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.	