REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	NW 127	Ø
1	SBE-2A		4-14-65		

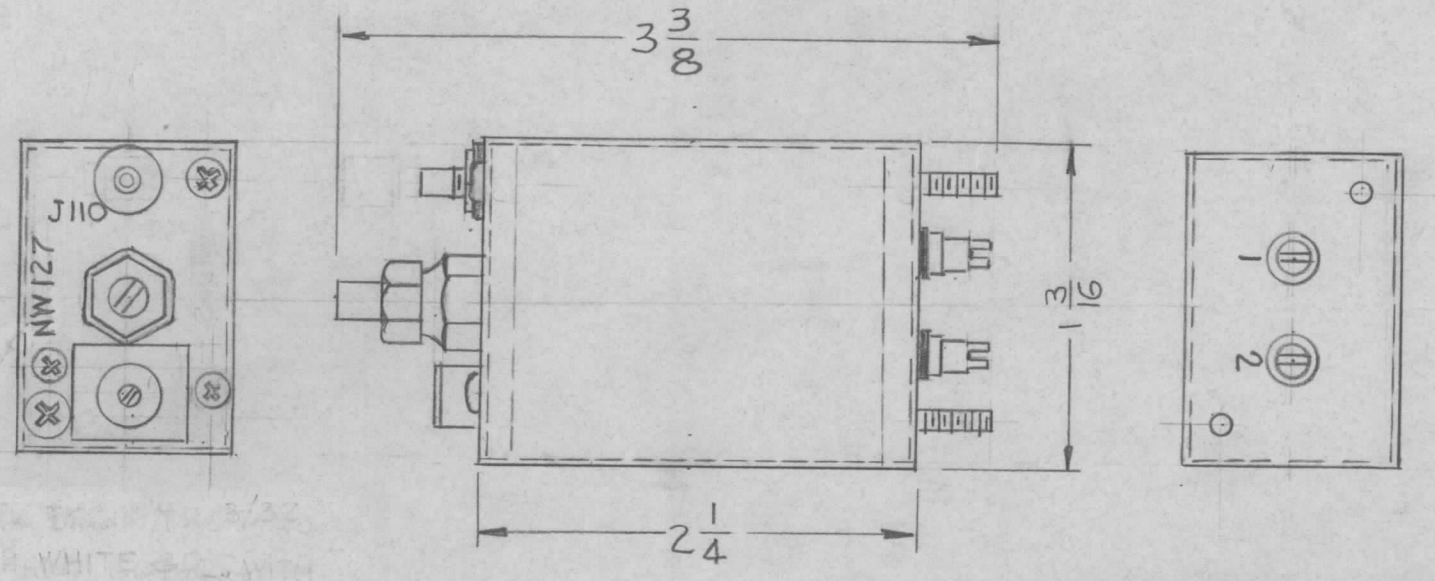

— ELEC. SPECIFICATIONS —

INCOMING FREQ. = 8-34 MC / 2-4 MC

RESULTANT FREQ. = 2-32 MC

INPUT INPEDANCE = 50 Ω NOMINAL

OUTPUT INPEDANCE = 50 Ω NOMINAL

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05 .XX ±.01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30′

SCALE 1:1

CODE A4230 (4)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

HF MODULATOR

DRAWN	CHECKED	FINAL APPROVAL
G.D.L		

ELEC. DES. APP. | MECH. DES. APP.

NW 127 Ø

TMC FORM 108-A

REPROVEL NO. 440H 23845