


REQ. PER UNIT	USED ON			NW128 A
	MODEL	ASS'Y. NO.	DATE	
	GPT-10K		4-19-65	
	KIT 213			

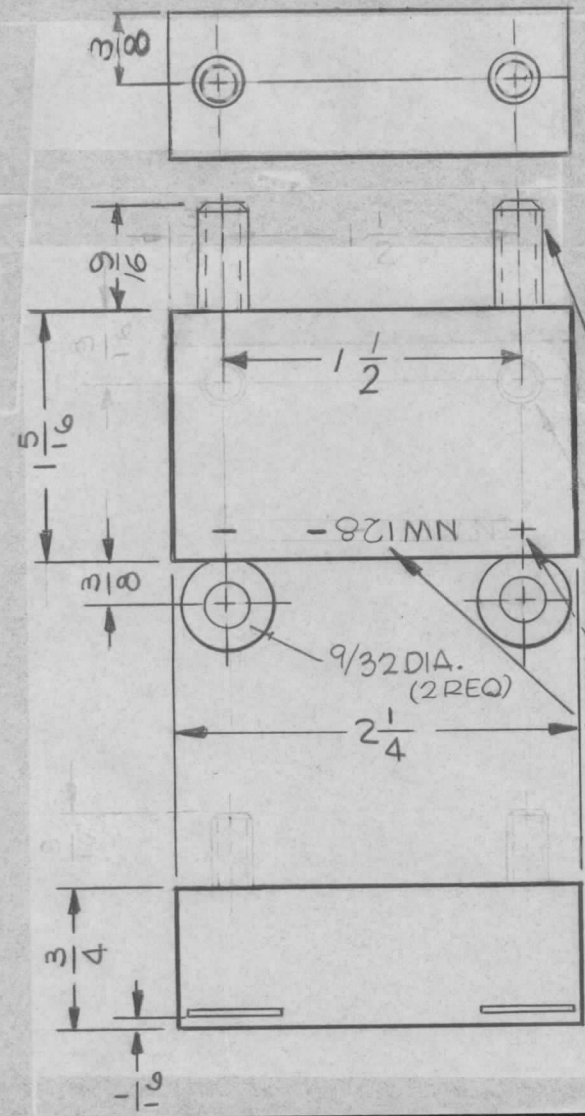

TMC PT. NO.	USE WITH METER CHARACTERISTICS		
	METER "R"	METER "I"	METER "E"
NW128-1	1000 Ω	200 μA	.200V
NW128-2	46 Ω	1 mA	.046V

(2) 1/4-20 NC-2A TERMINALS  
(SUPPLIED WITH MTG HDW)

MARK IN 1/8 HIGH GOTHIC, WHITE  
TMC PT. NO. & POLARITY  
SYMBOLS.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
			STOCK SIZE					
A	1/4 X 20 STUDS RELOCATED	14988	PLASTIC				NETWORK, METER PROTECTIVE, VOLTAGE SENSITIVE	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/20/65	MATERIAL					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE						
DECIMALS	TOLERANCES	FRACTIONS	CODE					
.X ± .05 .XX ± .01 .XXX ± .005		± 1/64 ANGLES ± 0° 30'	2A-4236					
				GL106		J.L. 4/15/65	J.C.B. 4/20/65	
				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
						F.R.D. 4-20-65	J.L. 4/20/65	NW128 A
				FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	