
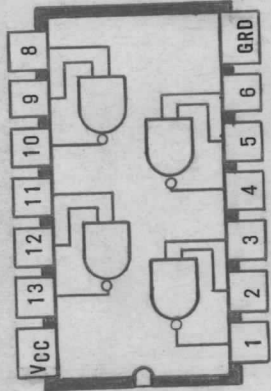


REVISIONS

APPLICATION		DESCRIPTION		E.M.N.NO		DRAFT		CHKD		APPD	
QTY	MODEL USED ON	ASS'Y NO.	LTR	EXPERIMENTAL RELEASE	DATE						
	HFSR-4		X	EXPERIMENTAL RELEASE	3/12/68			C.V.			Mde
			Ø	ORIG. RELEASE FOR PROD.	10-22-68	Ø		R.G.			JAB
			A	DIM. OUTLINE ADDED	3/24/69	19352		JA			JO

NOTES: A. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within ± 0.010 of its true longitudinal position relative to pin ① and ⑭.

B. All dimensions in inches unless otherwise noted.

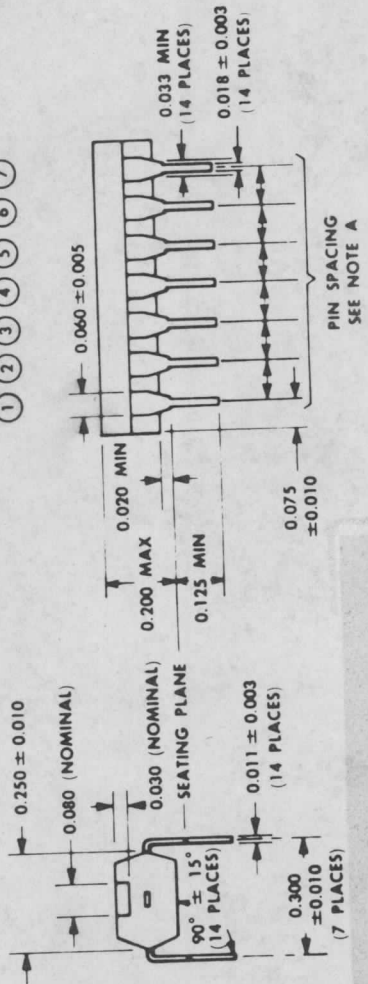

PROPAGATION DELAY: 35 nsec

POWER DISSIPATION: 88 mW TOTAL FOR FOUR GATES (22 mW PER GATE)

ELECTRICAL CHARACTERISTICS

TA = 0°C TO 70°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS	HOGAN			
.X ± .05	FINAL APPROVAL	DATE	LIST OF MATERIAL	
.XX ± .01	MECH. DES.	DATE	THE TECHNICAL MATERIEL CORP.	
.XXX ± .005	ELECT. DES.	DATE	MAMARONECK, NEW YORK	
1/64	CHECKED	DATE	NETWORK, QUADRUPLE 2-INPUT NANDGATE	
ANGLES	DRAWN	DATE	WITH OPEN COLLECTOR OUTPUT	
0°-30°	FINISH			
MATERIAL			ISSUE	
FINISH			SIZE	A
MATERIAL			CODE IDENT. NO.	82679
FINISH			DWG NO.	NW 167
MATERIAL			SCALE	SHEET
FINISH			OF	OF

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.