


APPLICATION

REVISIONS

QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RSLI-1		Ø	ORIGINAL RELEASE	12-8-72		EP		

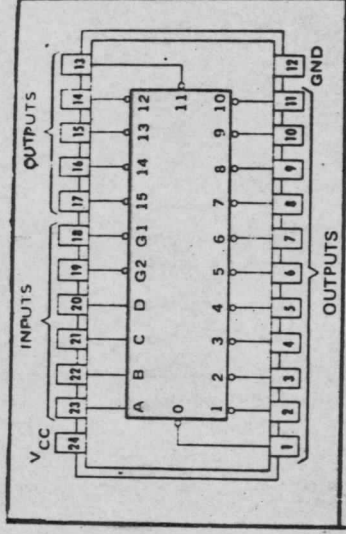


RECOMMENDED OPERATING CONDITIONS:
SUPPLY VOLTAGE V_{CC}: 4.75V TO 5.25V
ELECTRICAL CHARACTERISTICS:
T_A - 0°C TO 70°C

POSITIVE LOGIC

24-PIN N PLASTIC
 DUAL-IN-LINE PACKAGE OUTLINE

NOTES: a. Each pin centerline is located within 0.010 of its true longitudinal position.
 b. All dimensions are in inches unless otherwise noted.

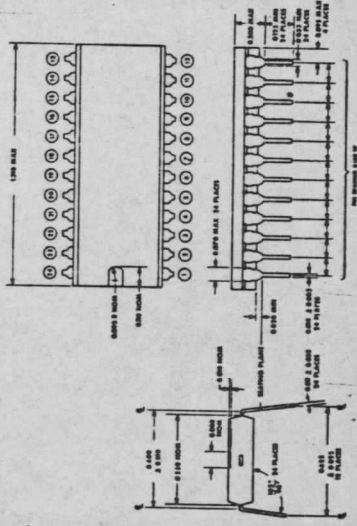

5401-265 (SN 74154N)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005				LIST OF MATERIAL	
FRACTIONS 1/64				THE TECHNICAL MATERIEL CORP.	
TOLS. ANGLES 0° - 30°				MAMARONECK, NEW YORK	
MATERIAL				NETWORK, 4 LINE TO 16 LINE DECODER/DEMULTIPLEXER	
FINISH					
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.				SIZE A	CODE IDENT. NO. 82679
					DWG NO. NW 185
					ISSUE Ø
				SCALE	SHEET OF

O. POSE

FINAL APPROVAL	DATE
MECH. DES.	DATE
ELECT. DES.	DATE
CHECKED	DATE
DRAWN	DATE

GE

12-7-72