



REQ. PER UNIT	USED ON			PM1222	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RFTA-1	A5226	3-8-64		

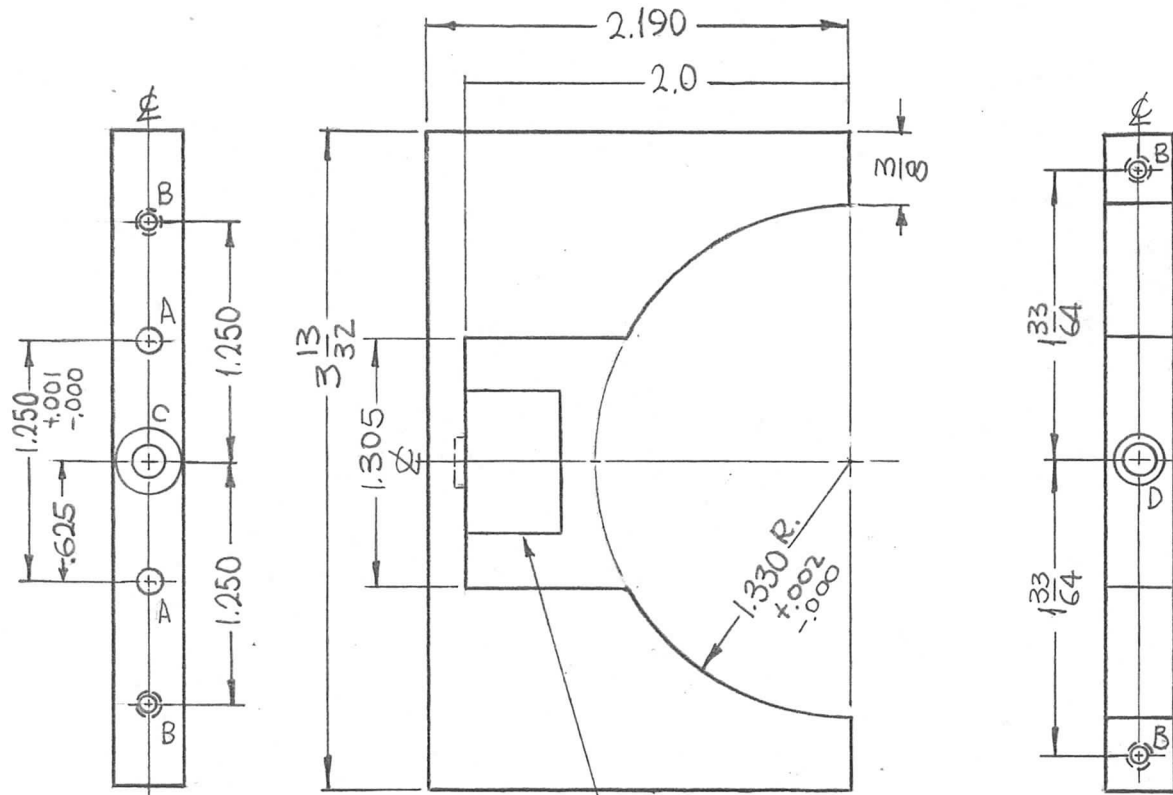

HOLES	DESCRIPTION	REQ.
A	.127 $\pm$ .001 DIA. X 1/8 DP.	2
B	DR. & TAP FOR 8-32 X 1/4 DP.	4
C	DR. .169 DIA. C'SINK 82° X .337 DIA.	1
D	C'BORE .250 DIA. X .062 DP.	1

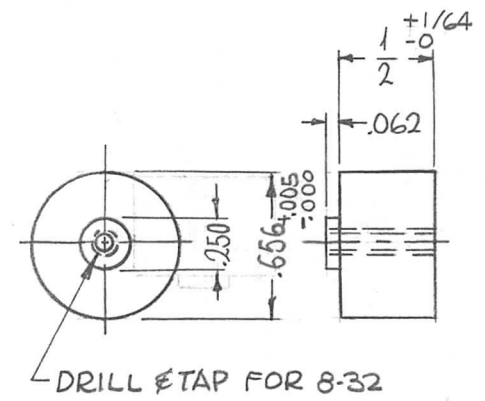

Ø	ORIGINAL RELEASE FOR PRODUCTION	5/20/66	Ø	CIV		<i>Joe</i>
X2	FINISH WAS S404	4-15-65	X2	SRG	OA	
X1	.656 WAS 734	4-14-65	X1	SRG	OA	
X	EXP. RELEASE	3-8-65	X	SRG		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				
DECIMALS .X $\pm$ .05 .XX $\pm$ .01 .XXX $\pm$ .005	TOLERANCES	FRACTIONS $\pm$ 1/64 ANGLES $\pm$ 0° 30'	CODE A			

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
	3/8 THICK		THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE		MAMARONECK.	
	ALUMINUM		NEW YORK	
	MATERIAL		SUPPORT, CAPACITOR	
	2024-T4	SRG	<i>Joe</i>	<i>Joe</i>
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S245 SILVER PLATE		aa 6/19/66	<i>Joe</i>	PM1222
S423 SILVER KOTE				Ø
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		