


PM1240 \emptyset

REVISIONS		DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X1	SLOT ADDED, WAS 3/16 THICK	4-26-65	X1	SRG		
X2	DIM. SLOT 3/16 WAS 3/4	4-30-65	X2	G.D.L		
X3	4"D" HOLES ADDED	5-26-65	X3	G.D.L		
X4	PN116-M-3S WAS PN116-N-3S ORIGINAL RELEASE FOR PRODUCTION	5-25-65	X4	SRG	DA	
\emptyset		4-26-67	\emptyset	CV		

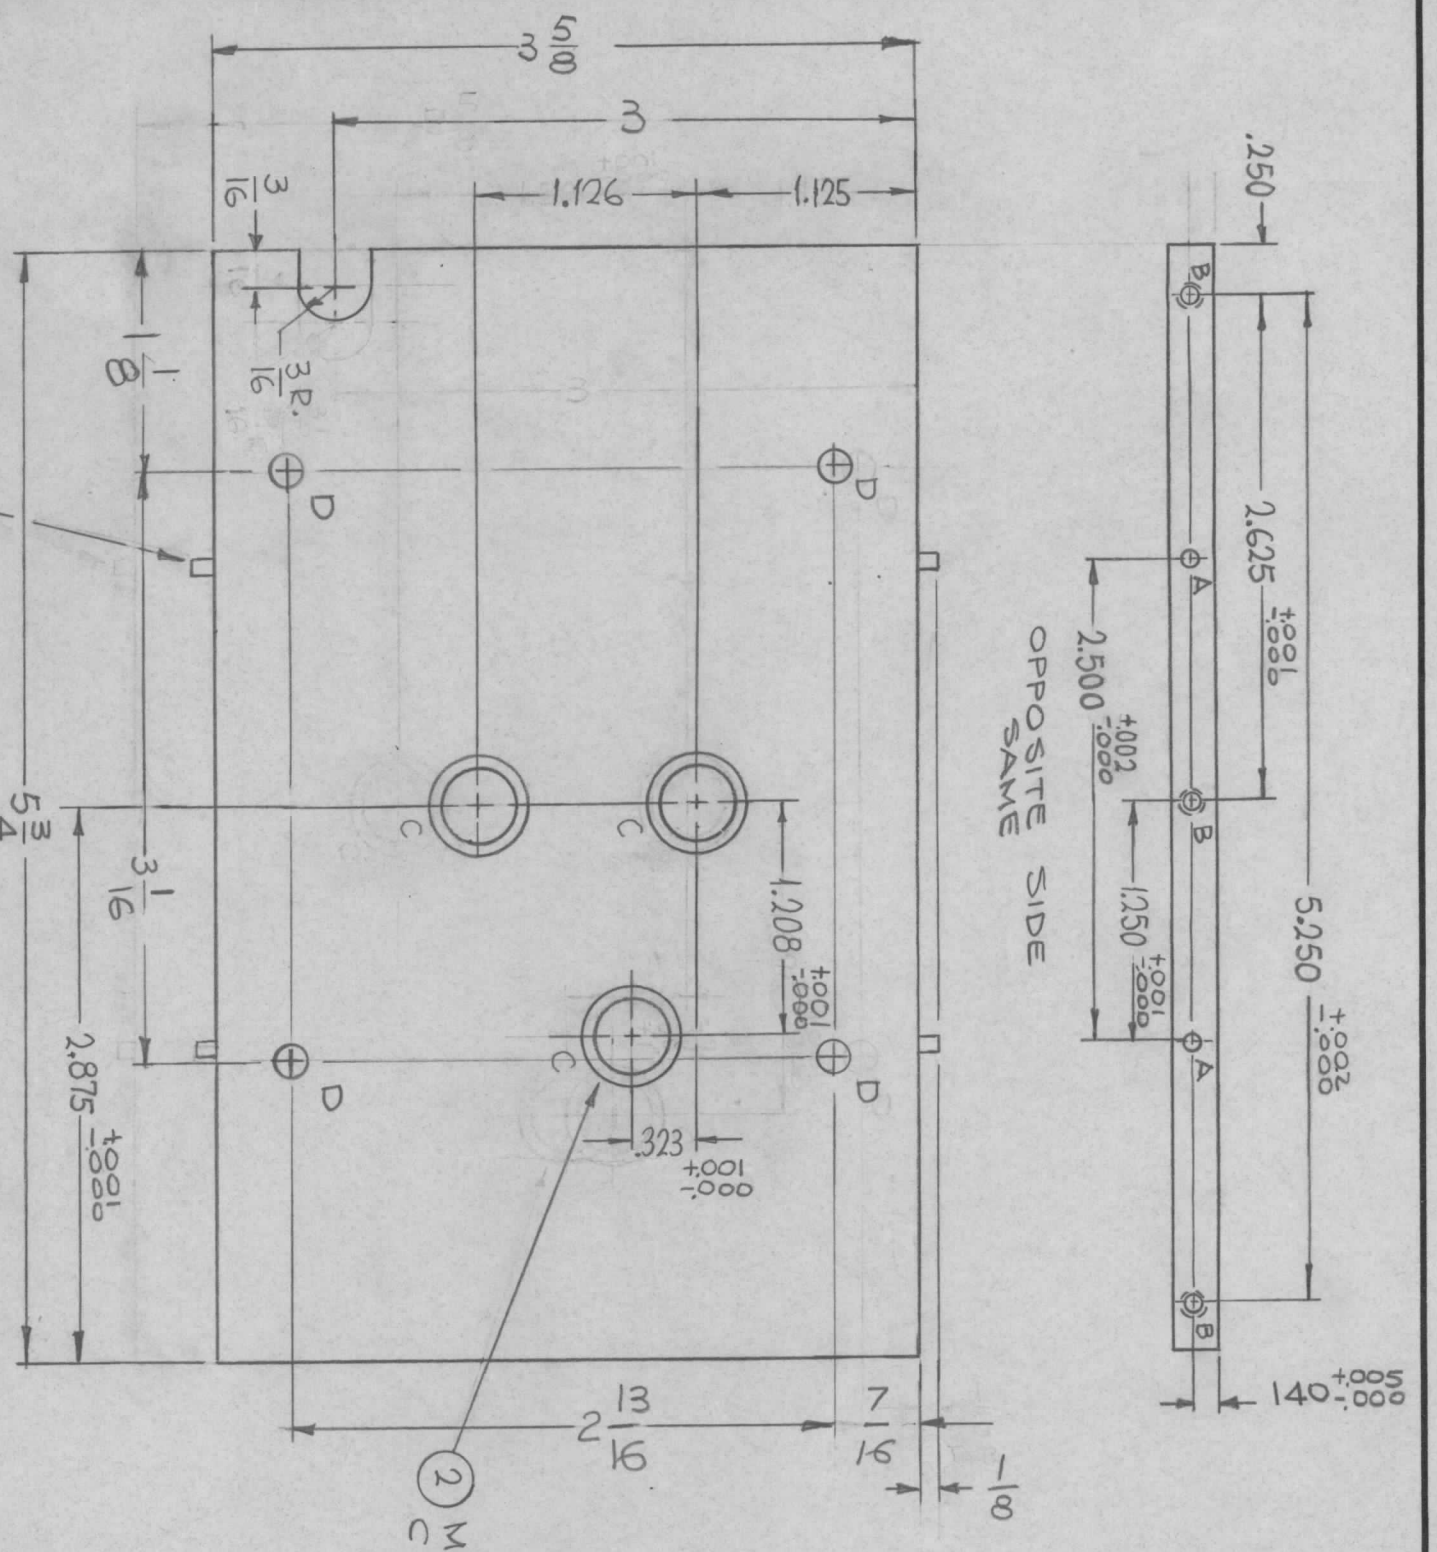

HOLES	DESCRIPTION	REQ.
A	.092 \pm .008 DIA. X 1/4 DR	4
B	DR. #TAP FOR G-32 X 1/2 DP.	6
C	DR. 3/8 DIA. C'BORE 4990 DIA X .125 \pm .005 DR 4995	3
D	11/64 DIA	4

REQD.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
3	2	BB126-15	BEARING, RACE	C
4	1	PN116-M-3-S	PIN, DOWEL	A

F. BUDETTI		LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP.	
.250THICK ALUMINUM		MAMARONECK, NEW YORK	
2024-T3		TITLE	
S404 YEL. IRIDITE		PLATE, GEAR, REAR	

QTY./UNIT	1	TSTE-10R	ASSY. NO.	AS16S
SCALE	1:1	MODEL USED ON	CODE	A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		TOLERANCES	
DECIMALS	.X \pm .05	FRACTIONS	\pm 1/64
	.XX \pm .01	ANGLES	\pm 0° 30'
	.XXX \pm .005		

NOTES

1 MOUNT IN ALL A HOLES

2 MOUNT IN ALL C HOLES

OPPOSITE SIDE SAME