
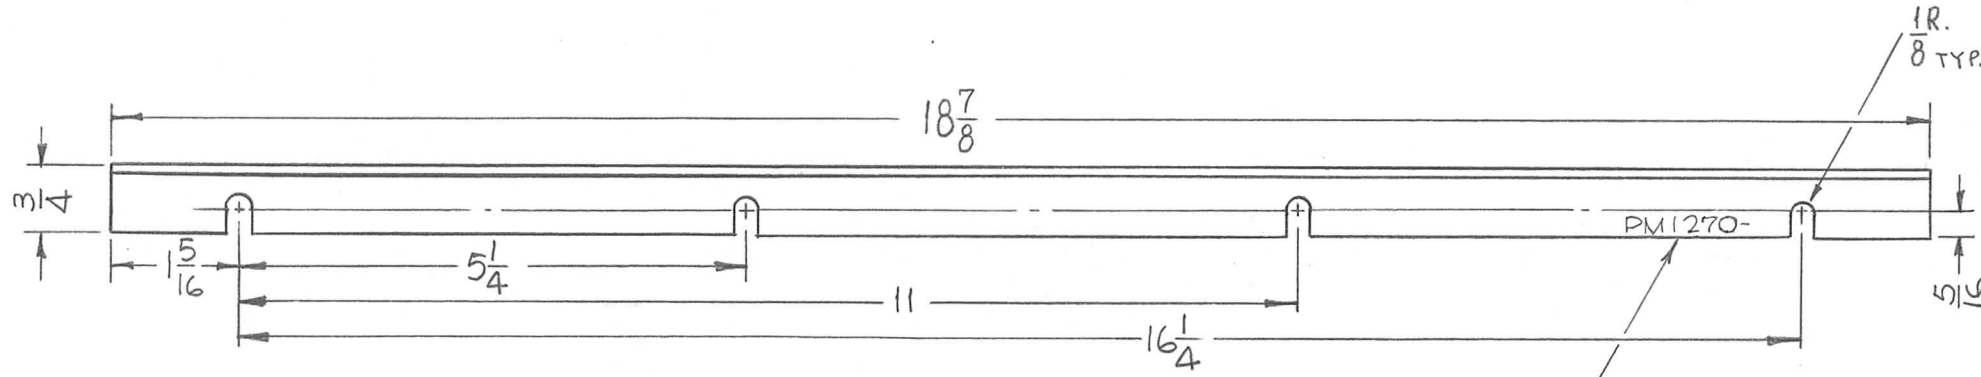


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			PM1270	A
	MODEL	ASS'Y. NO.	DATE		
2	DDRR-506	A5108	7-20-65		

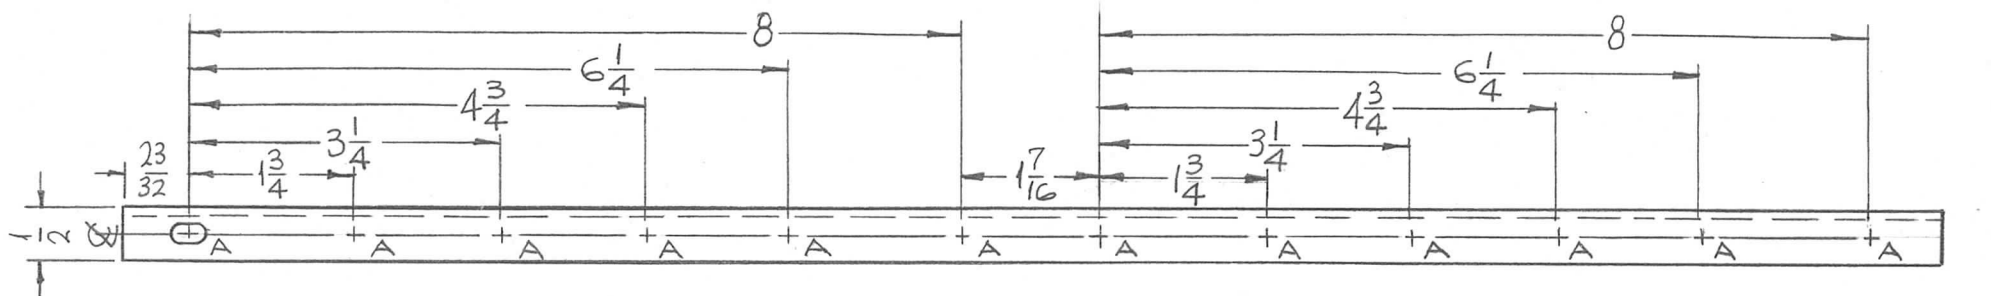

HOLES:
A ~ 11/32 X 11/64 SLOTS - 12 REQ.

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		3/4 X 1/2 X 1/8 ϕ	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		STEEL	BRACKET, MTG. CHASSIS				
		MATERIAL					
		HOT ROLLED					
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
		S105 CAD. PLATE					
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE				
			1/2:1				
DECIMALS	TOLERANCES		FRACTIONS	CODE			
.X \pm .05			\pm 1/64	A			
.XX \pm .01			ANGLES				
.XXX \pm .005			\pm 0° 30'				

MP 8-9-65 PM1270 A