


TMC P/N	MATERIAL	KEYWAY	A	B	REQ. PER UNIT	USED ON			PM1315	B
						MODEL	ASSY. NO.	DATE		
PM1315-1	G7 SILICONE GLASS	.125 WIDE .128 DEEP	5 3/16	11/16	1	TLAA-2.5K	AS128	8-22-66		
-2	G10-EPOXY	3/32 WIDE & DEEP	8 1/4	7						

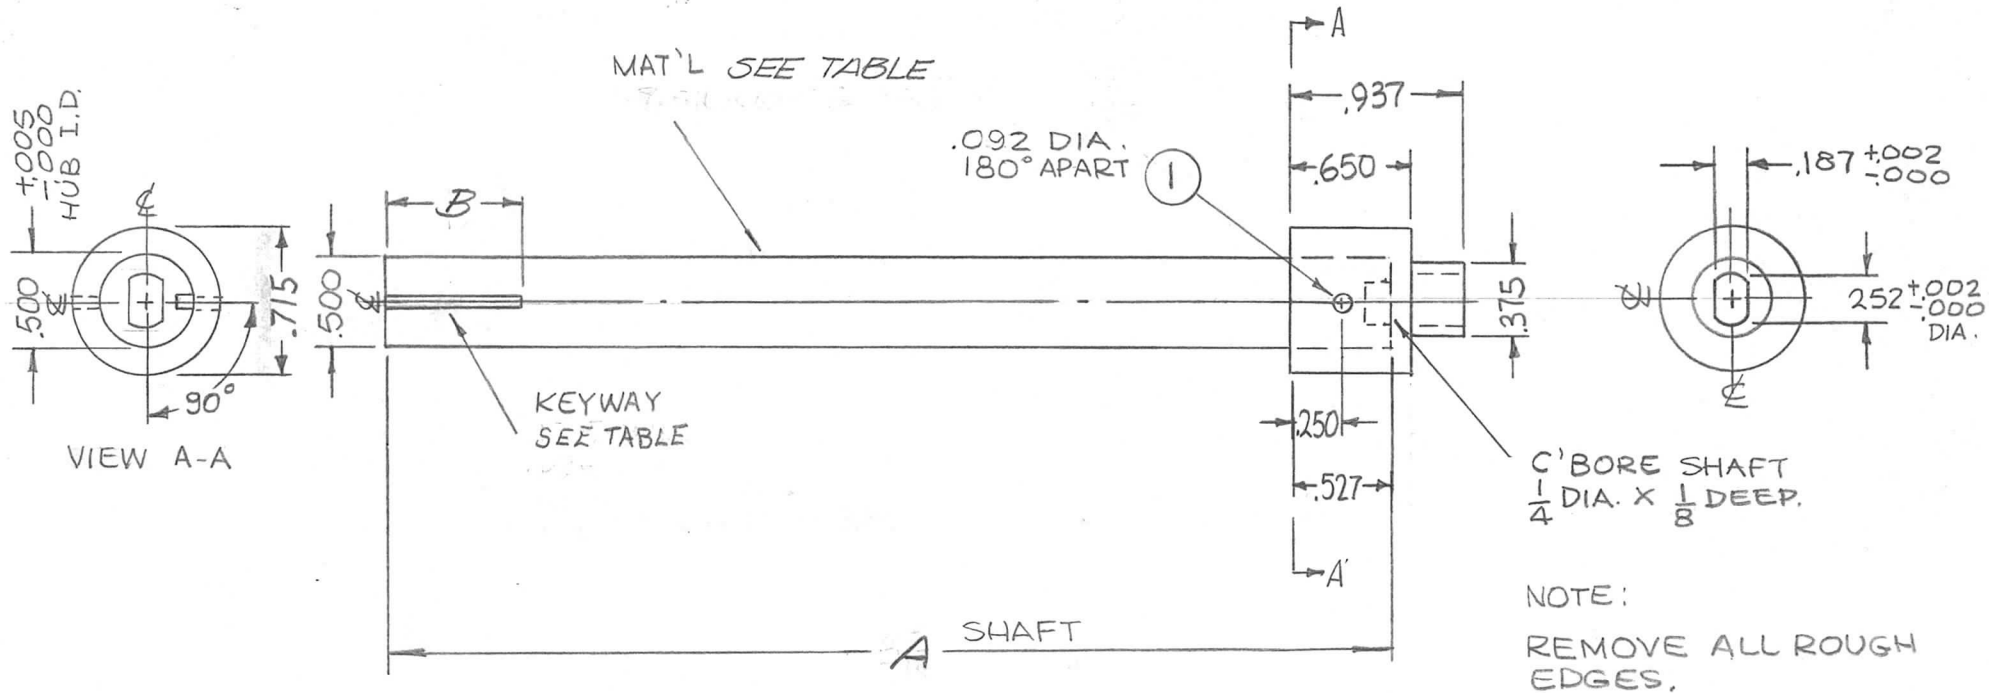

B	ADD TMC P/N CHART	1-13-72	20471	GE	ES	ES									
A	ADDED DIM. 90° FOR KEYWAY. IN LINE WITH PIN WITHIN .301 DEL.	5-31-67	18256	L.A.K.	MS	FB		1	PN 116-M-6-S	PIN, DOWEL					
Ø	ORIGINAL RELEASE FOR PRODUCTION	11-18-66	Ø	RME			REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL				
X3	5-3/16 WAS 4-1/8	10-21-66	X2	MS	MS	MS	AS SHOWN		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK						
X2	.715 WAS .750 MAT'L W/G10	8-25-66	X1	MS		MS	STOCK SIZE		HUB & SHAFT, BANDSWITCH						
X1	REDRAWN & REVISED	8-22-66	X	MS	MS	MS	MATERIAL								
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	#303		MS	MS	MS				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE	1:1								
DECIMALS		FRACTIONS		CODE		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
.X ± .05		± 1/64		A		S104-PASSIVATE				MS		MS		PM1315 B	
.XX ± .01		ANGLES				FINISH & SPEC. NO.				ELEC. DES. APP.		MECH. DES. APP.			
.XXX ± .005		± 0° 30'													