



REQ. PER. UNIT	USED ON			PM-708	A
	MODEL	ASS'Y. NO.	DATE		
1			8-21-61		

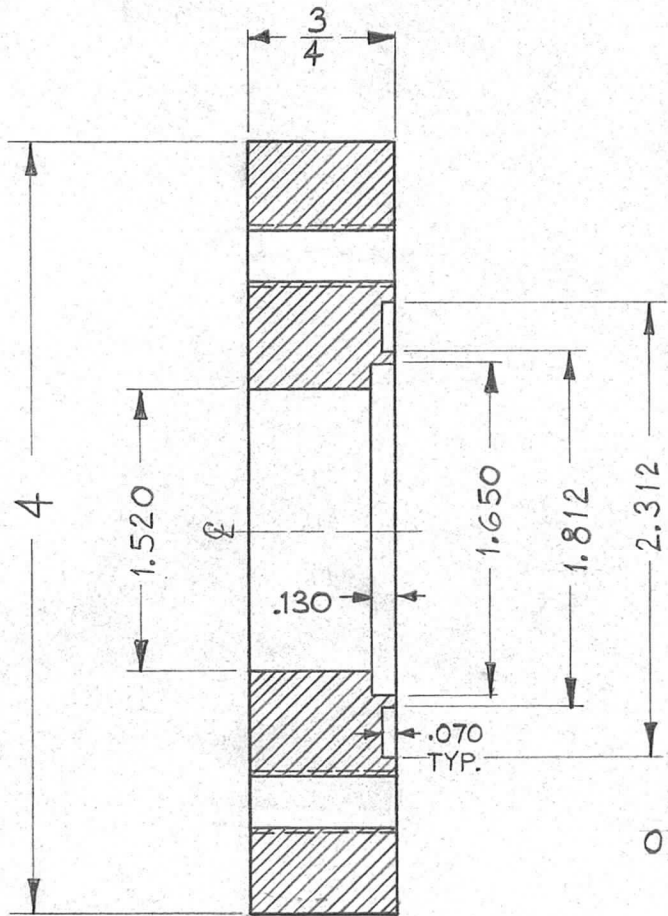

SECTION "A-A"

DRILL $\frac{5}{16}$ DIA. C'BORE $\frac{9}{16} \times \frac{3}{8}$ DEEP, EQUALLY SPACED ON 3" DIA. 4 REQ.

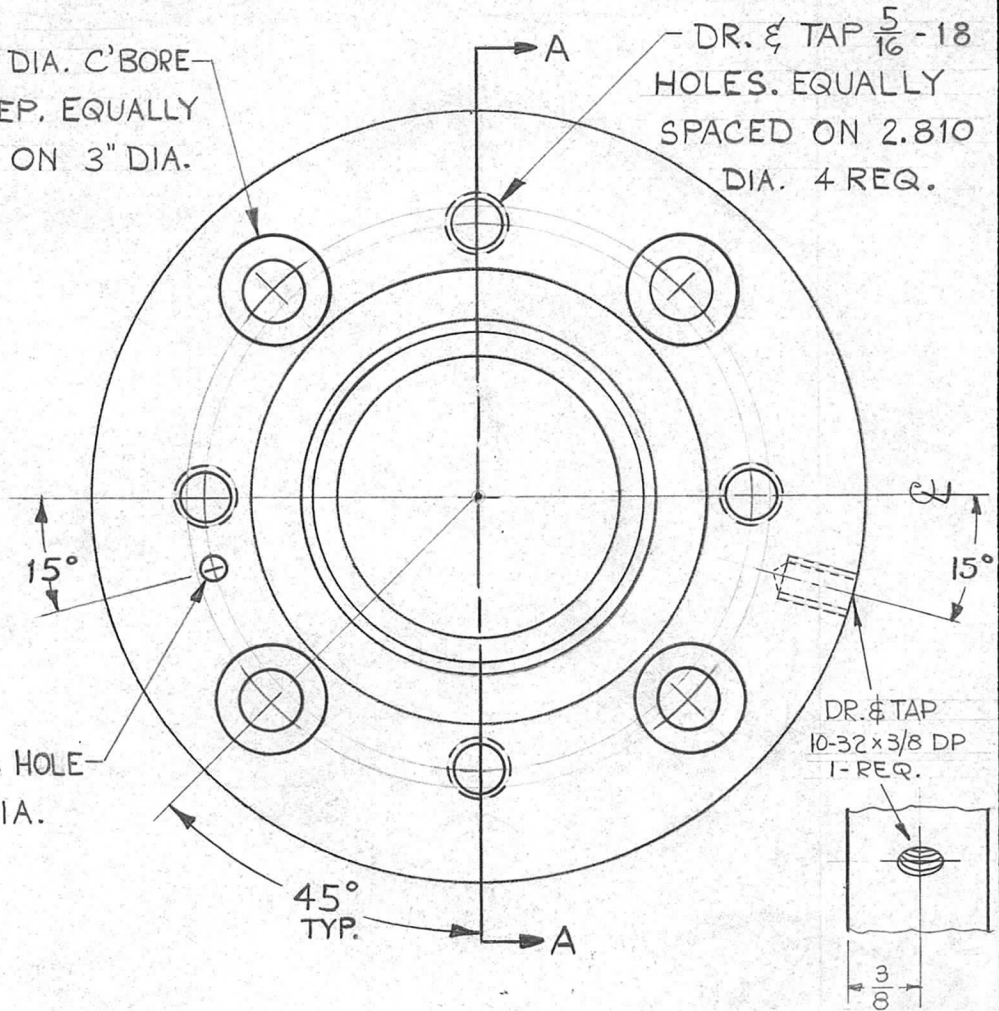

.125 DIA. HOLE ON 2.810 DIA.

DR. & TAP $\frac{5}{16}$ -18 HOLES. EQUALLY SPACED ON 2.810 DIA. 4 REQ.

DR. & TAP 10-32 x 3/8 DP 1-REQ.

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL	
		3/4	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
		BRASS	PLATE, ADAPTOR				
		MATERIAL	1 5/8 E.I.A.				
		1/2 HARD	W.A.F.	J.H.L.	J.O.B.		
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
		S-245 SILVER PLATE, BRIGHT					
		S-423 IRIDITE 18-P SILVER-KOTE					
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			
A	1	DR & TAP 10-32 x 3/8 DP, 1 REQ. ADDED	8-14-62	7032	95	J.H.L.	
ISSUE		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: FULL (DO NOT SCALE)				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±							
			PM-708			A	