


3/16 DIA. HOLES, EQUALLY SPACED  
45° APART ON A 1.257 RADIUS.  
(8 REQ.) ±.002

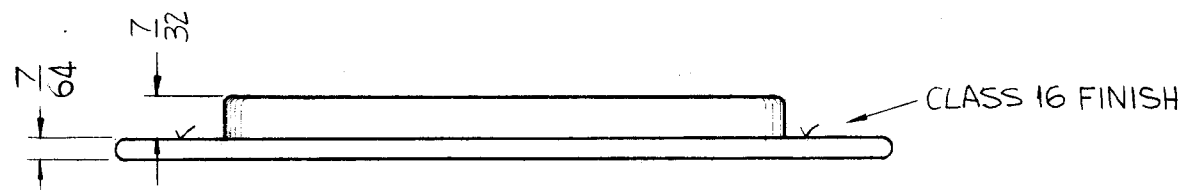

**FINISH NOTE:**

- POLISH BEFORE PLATING
- S-245 SILVER PLATE, BRIGHT.
- S-423 IRIDITE 18-D SILVER KOTE.
- SEMI-BUFF (AFTER PLATING).
- ALL DIMENSIONS APPLY AFTER PLATING.
- 1/32 R. ON ALL EDGES

**NOTES**

2	GPT-200K(AS-124)	AX-443
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
DO NOT SCALE		
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

PM-838 0

**REVISIONS**

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
0	ORIGINAL RELEASE FOR PRODUCTION	5-18-64		SRG		

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. BUDETTI LIST OF MATERIAL				
MATERIAL BRASS HALF HARD			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH SEE NOTE			TITLE RING RETAINING, BANDSWITCH	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN SRG	DATE 11-20-61	FINAL APPROVAL RDC
		CHECKED aa	DATE	
DECIMALS .X ± .08 .XX ± .01 .XXX ± .005		ELECT. DES. COP 7B		DATE 11-27-64
TOLERANCES		MECH. DES. LW		DATE 2/1/64
FRACTIONS ± 1/64 ANGLES ± 0° 30'		SHEET		REV. LTR. 0