


REQ. PER UNIT	USED ON			PM-980
	MODEL	ASS'Y. NO.	DATE	
10	GPT-200K AS-124	AX-442	9-3-63	

HOLES REQ  
A-13/64 DIA. 3

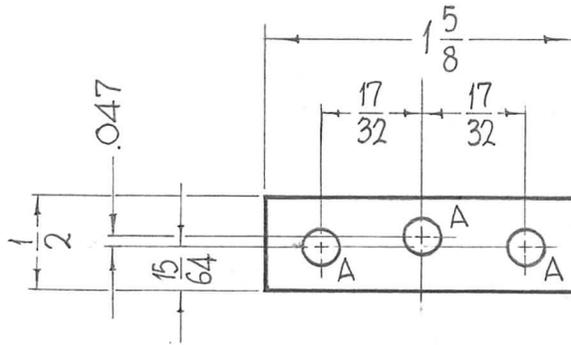

NOTES

- 1- ROUND ALL EDGES.
- 2- POLISH BEFORE PLATING.
- 3- FINISH- S245- SILVER PLATE, BRIGHT.  
S423- IRIDITE, 18P SILVER KOTE.

							REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
								1/8 THICK	THE TECHNICAL MATERIEL CORP.			
								STOCK SIZE	MAMARONECK, NEW YORK			
								BRASS	CONTACT HOLDER			
								MATERIAL				
0	ORIG. RELEASE FOR PROD.	5-16-64		SAG				HALF HARD	John C. Biele	aa	Roc	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE	1" = 1"					
DECIMALS	TOLERANCES		FRACTIONS	CODE								
.X ± .05			± 1/64									
.XX ± .01			ANGLES									
.XXX ± .005			± 0° 30'									
							SEE NOTES			DBB	2/4/64	PM-980
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			