REQ. PER UNIT	USED ON			P0313	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RFTA-1		9-30-65		

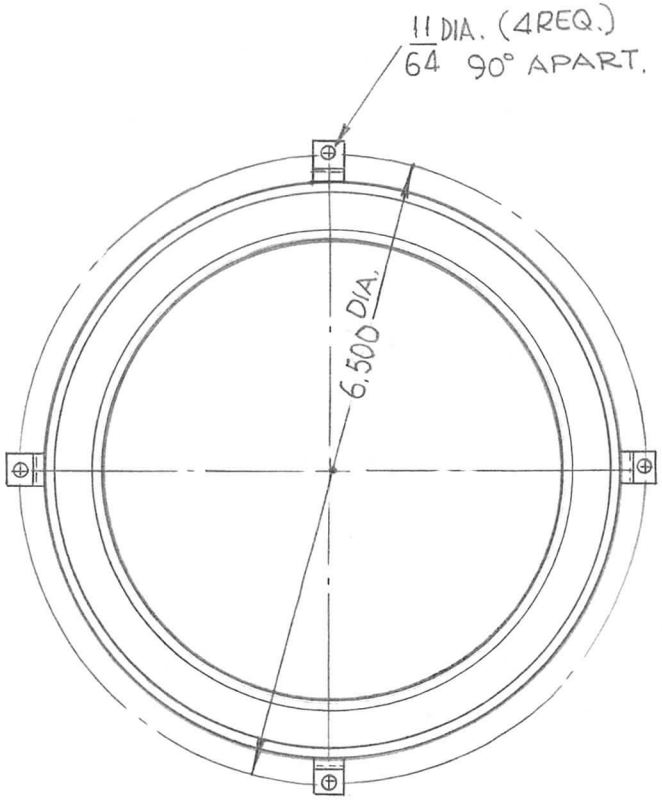

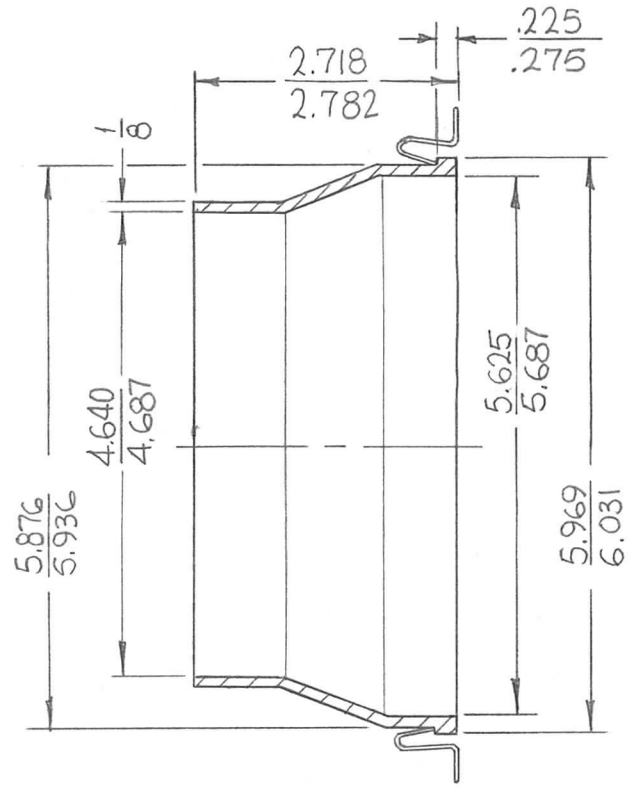

SPECIFICATIONS:

MATERIAL:
CHIMNEY: POLYESTER PREMIX COMPOUND (RED), FIBERGLASS PER MIL-G -1140C, RESIN PER MIL-R - 7575.
MAX. OPERATING TEMP 125°C.
CHIMNEY CLIPS: BERYL. COPPER, HEAT TREATED AND CADMIUM PLATED.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIG. RELEASE	11-13-68	Ø	R.G.		
X2	COMPLETELY REVISED	9-30-65	X2			
X1	ADDED MFG. CAT. NO	8-26-65	X1			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1/2:1

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE C

S401-23 (SK-1426)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			F. BUDETTI	

STOCK SIZE: SEE SPECS.

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CHIMNEY, TUBE

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP.	MECH. DES. APP.	
		P0313 Ø