


REQ. PER UNIT	USED ON			PX-515	B
	MODEL	ASS'Y. NO.	DATE		
1	GPT-40K	AX-209	2-12-60		

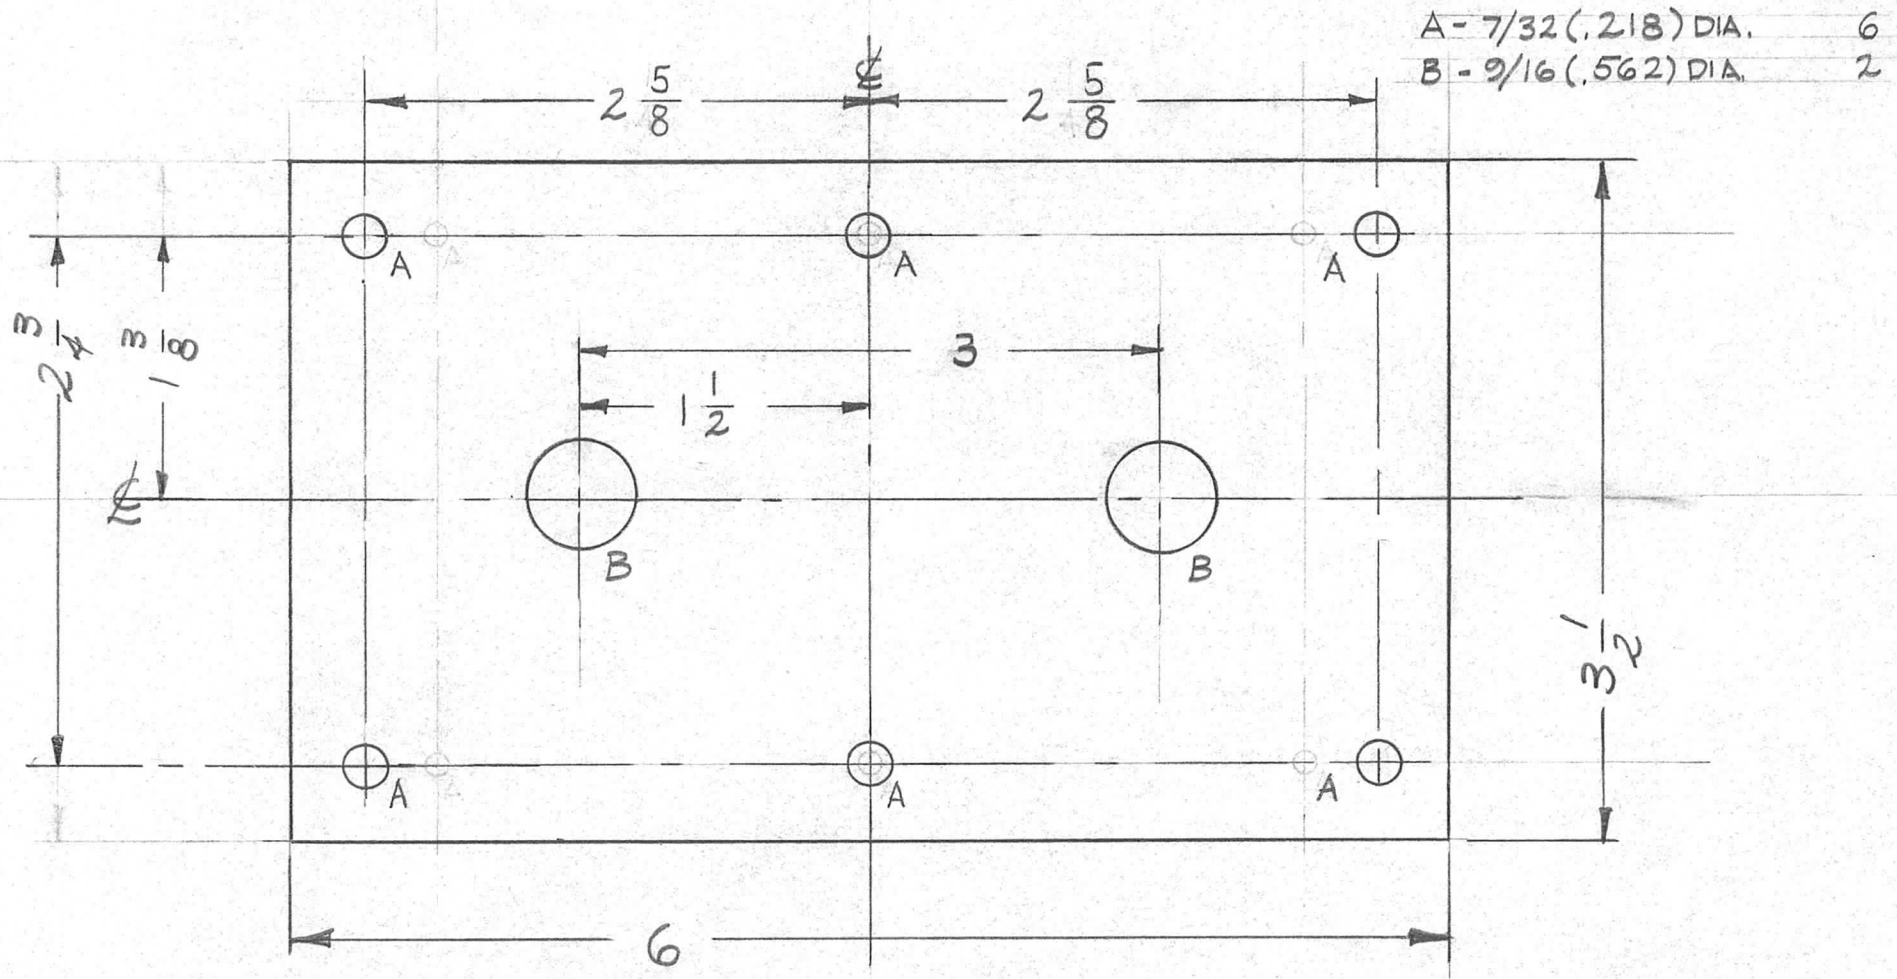

A - 7/32 (.218) DIA. 6
 B - 9/16 (.562) DIA. 2

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
									1/4 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK PLATE, FEED-THRU P.A. SECTION		
									STOCK SIZE			
									SILICONE GLASS			
									MATERIAL			
									G7			
									TYPE & TEMPER	HEAT TREAT. SPEC.		
									FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	

B	1	DIMS. 2 5/8 WAS 2 1/4	4-20-60	2150			
A	1	MAT. WAS EPOXY	3-28-60	1952			

TOLERANCES: DEC. DIM. ±, FRAC. DIM. ± 1/64, ANGULAR DIM. ±

SCALE: $\frac{1}{4}$

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

10RILLIS 2-11-60

20R

FINAL APPROVAL: PX-515 B