


REQ. PER UNIT	USED ON			PX-556	B
	MODEL	ASS'Y. NO.	DATE		
1	GPT-40K	AX-209	4-26-60		

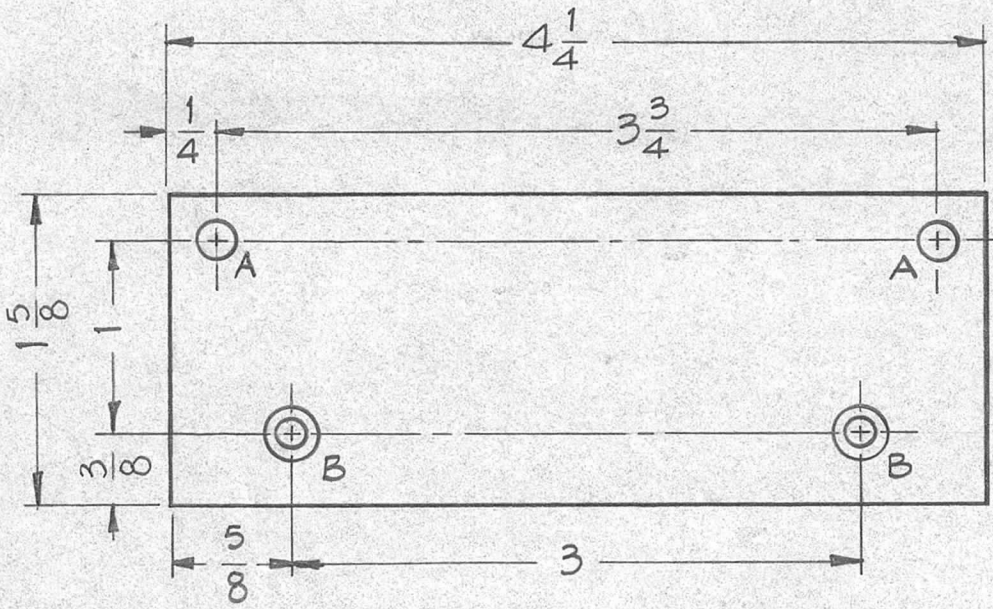

HOLES REQ'D

A ~ 13/64 (.203) DIA. 2

B ~ C5ink for 8-32 F.H.S. 2

* FUNGUS PROOFING PER TMC SPECIFICATION S-113

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
									1/8		THE TECHNICAL MATERIEL CORP.		
									STOCK SIZE		MAMARONECK, NEW YORK		
B		SI13 ADDED	4/13/64	11186	AM	Jde	DD				CAPACITOR MOUNT		
A	1	MAT. WAS SILICONE GLASS TYPE 6 TEMPER 67	10-17-60	3203	RN		DD		PHENOLIC		(WRAP-A-ROUND)		
									MATERIAL				
									XXXXP		DJ Mar JCSiele	DD	
									TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
									*				PX-556 B
									FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	

TOLERANCES

DEC. DIM. ±

FRAC. DIM. ±

ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES