REQ. PER UNIT	USED ON			PX-833	A
	MODEL	ASS'Y. NO.	DATE		
1	TTRA-4	A-3210	10-17-63		

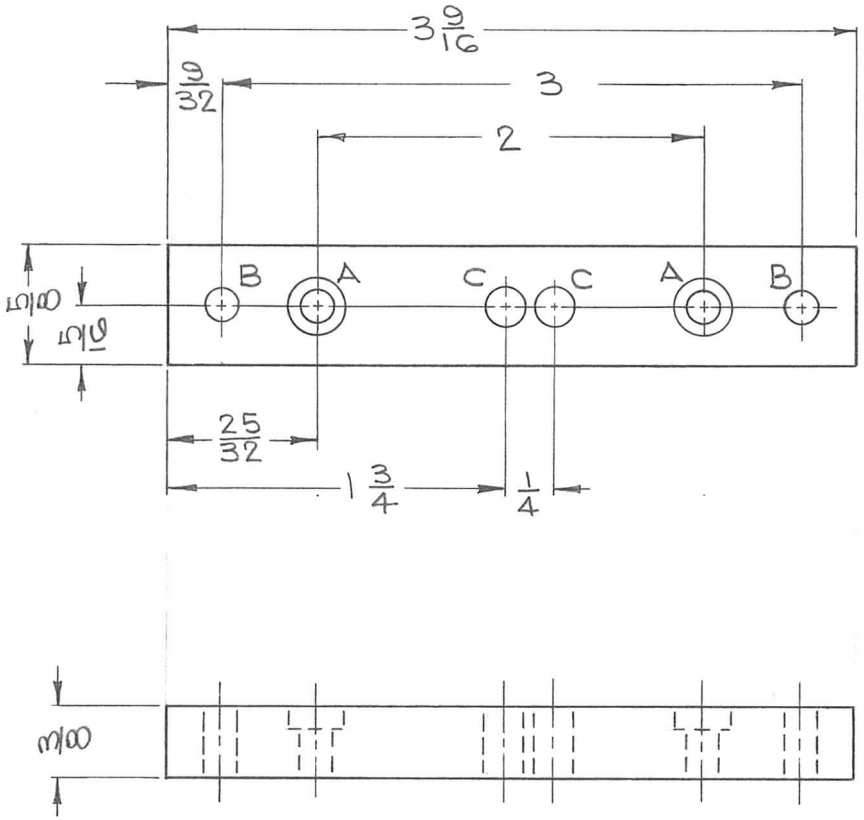

HOLE	DESCRIPTION	REQ
A	5/32 DIA. C'BORE 5/16 DIA. x 1/8 DP.	2
B	5/32 DIA.	2
C	3/16 DIA	2

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	"A" WAS 5/32 DIA C'BORE 9/32 DIA x 1/8 DP.	11.18.64	12953	bb		TH

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			KOHN	

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

STOCK SIZE: GLASS BONDED MICA

SUPPORT, COIL

MATERIAL: GRADE-L432 MIL-I-10A

TYPE & TEMPER | HEAT TREAT. SPEC.: NONE

FINISH & SPEC. NO.

DRAWN	CHECKED	FINAL APPROVAL
10-17-63	11/4/63	
R KOHN 11/4/63	R KOHN 11/4/63	PX-833 A
ELEC. DES. APP.	MECH. DES. APP.	