


REQ. PER UNIT	USED ON			PX935	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TSTE-10K	AX580	4-26-65		

HOLES:
.175 DIA. (4 REQ.)

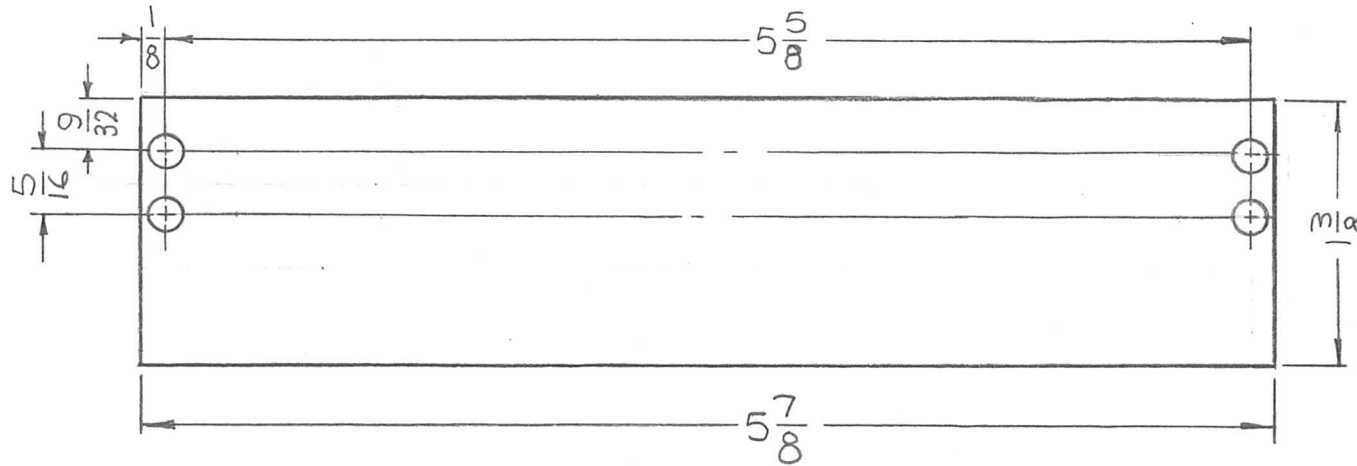

REF; LD1883-

REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION				SYMBOL
	1/8 THICK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
Ø	PHENOLIC	INSULATOR, TERM. STRIP				
	MATERIAL					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	ORIGINAL RELEASE FOR PRODUCTION	4-29-66	Ø	WFO		WFO
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			
	XXXXP	—	SRG	QCB	M. H. King	
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
	5113			WFO	PX935 Ø	
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			