


REQ. PER UNIT	USED ON			PX967	Ø
	MODEL	ASS'Y. NO.	DATE		
1	HVRB-2		11-22-65		

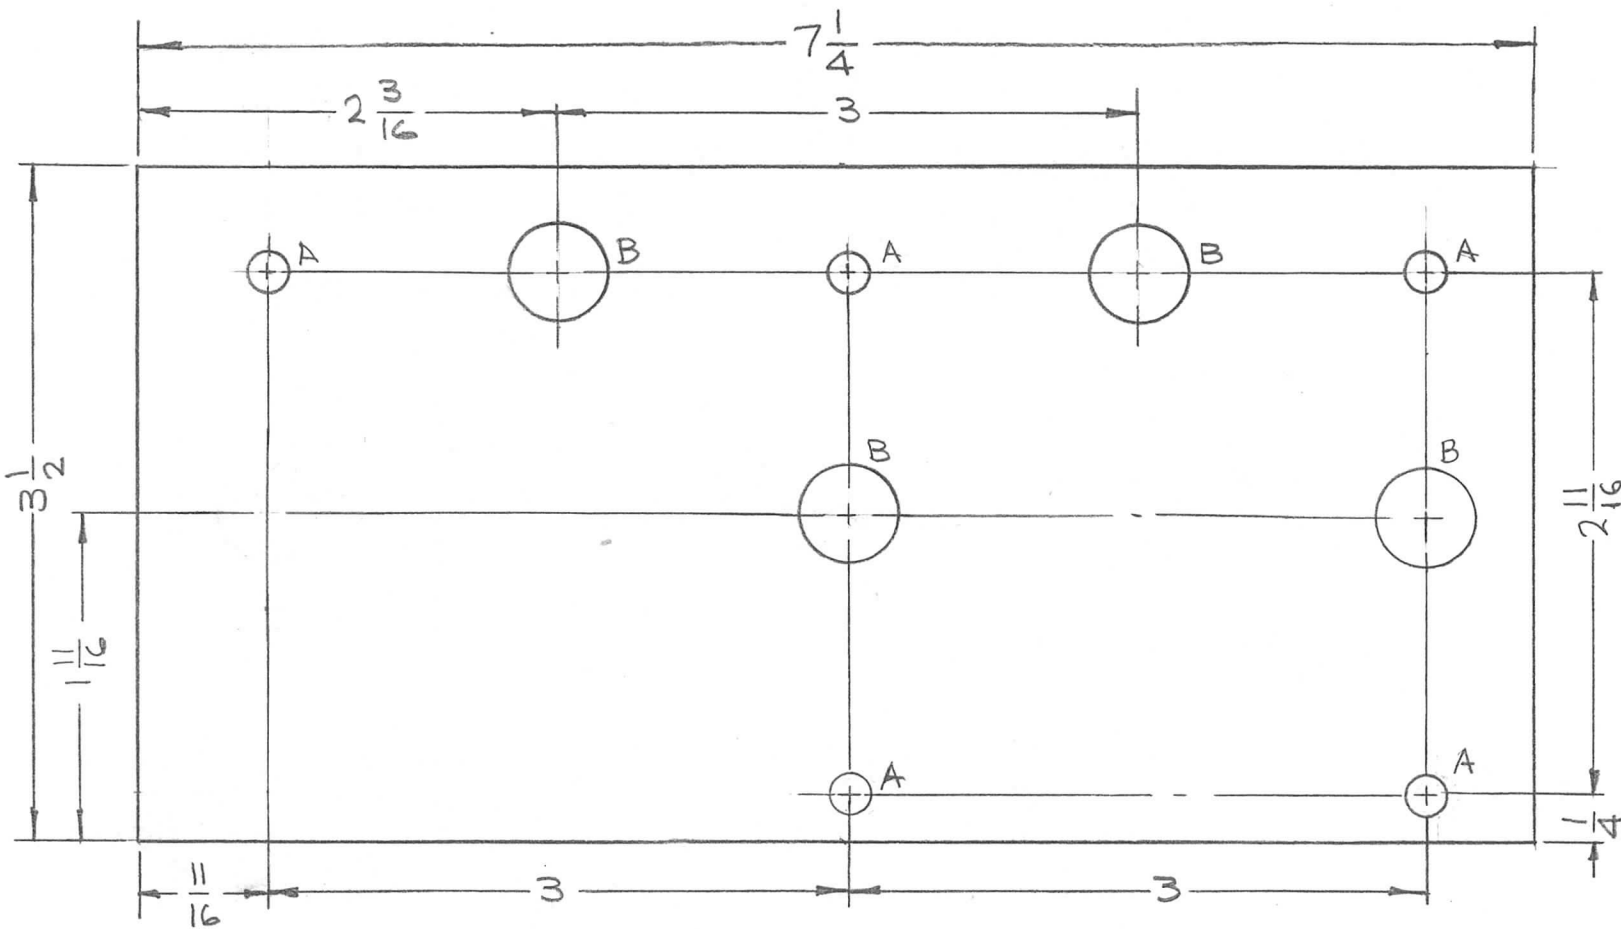

HOLES:
 A ~ 13/64 DIA. (5 REQ)
 B ~ 1/2 DIA (4 REQ)

REF: LD2025

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL							
	3/32 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK								
Ø	ORIGINAL RELEASE FOR PRODUCTION	6/14/66	Ø CV	<i>[Signature]</i>							
X1	THICKNESS WAS 1/8	11-23-65	X1	<i>[Signature]</i>							
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			G10		<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	PX967	Ø