
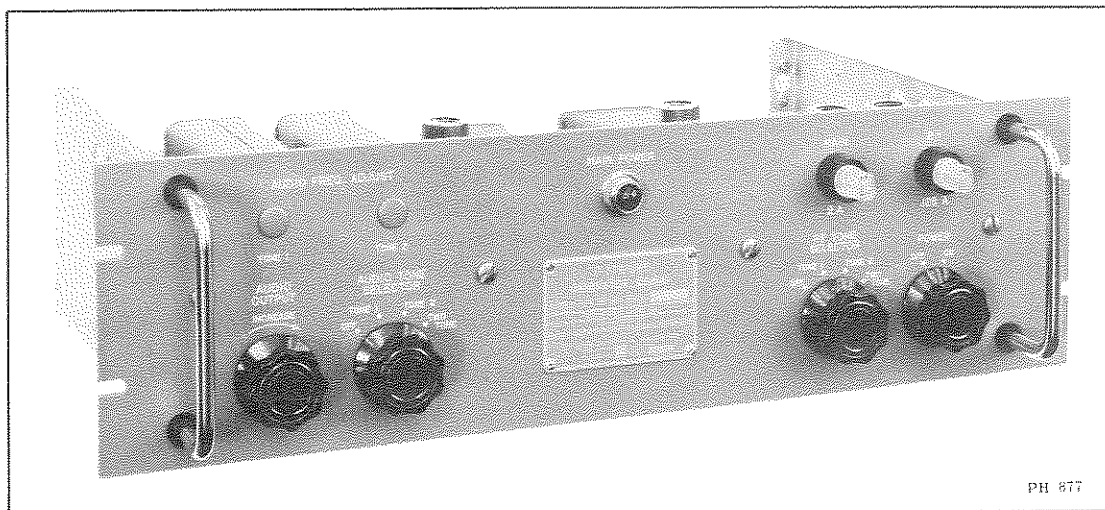


## SALES SERVICE BULLETIN NUMBER 230

Two Tone Generator, Model TTG  
C-579/URT Generator, Signal



TMC Model TTG (C-579/URT) is a two-tone generator designed to be used with distortion analyzing equipment in the testing of single sideband exciters and transmitters.

The TTG is unique for two important reasons:

1. The spacing of the two audio tones is such that the third, fifth and seventh order products may be presented.
2. Two RF tones are generated for the specific purpose of checking the proper operation of spectrum analyzing equipment.

The TTG is supplied with the necessary cables and connectors for quick installation. All controls are on the front panel with AF and RF output on the rear apron.

### TECHNICAL SPECIFICATIONS:


#### AUDIO FREQUENCY OSCILLATOR

OUTPUT FREQUENCIES:	935 cps 2805 cps Either or both selectable from the front panel
HARMONIC DISTORTION:	More than 65 db down
INTERMODULATION DISTORTION:	More than 55 db down
OUTPUT IMPEDANCE:	600 ohms unbalanced
OUTPUT LEVEL:	0 to 0.5 volts continuously variable from front panel.
OUTPUT CONNECTION:	Barrier Terminal Strip

## RADIO FREQUENCY OSCILLATOR

OUTPUT FREQUENCIES:	1999 kc crystal controlled 2001 kc crystal controlled Either or both selectable from the front panel
DISTORTION:	More than 60 db down
OUTPUT IMPEDANCE:	70 ohms unbalanced
OUTPUT LEVEL:	1.0 volt
OUTPUT CONNECTOR:	BNC
CONTROLS:	Power Switch AF Tone Selector RF Tone Selector Audio Output Control
PRIMARY POWER:	115/230 volts, 50/60 cps approximately 35 watts.
SIZE:	19" W x 5 1/4" H x 13 1/2" deep
SHIPPING WEIGHT:	50 lbs.
COMPONENTS AND CONSTRUCTION:	Equipment manufactured in accordance with JAN/MIL specifications wherever practicable.

## TYPICAL INSTALLATION

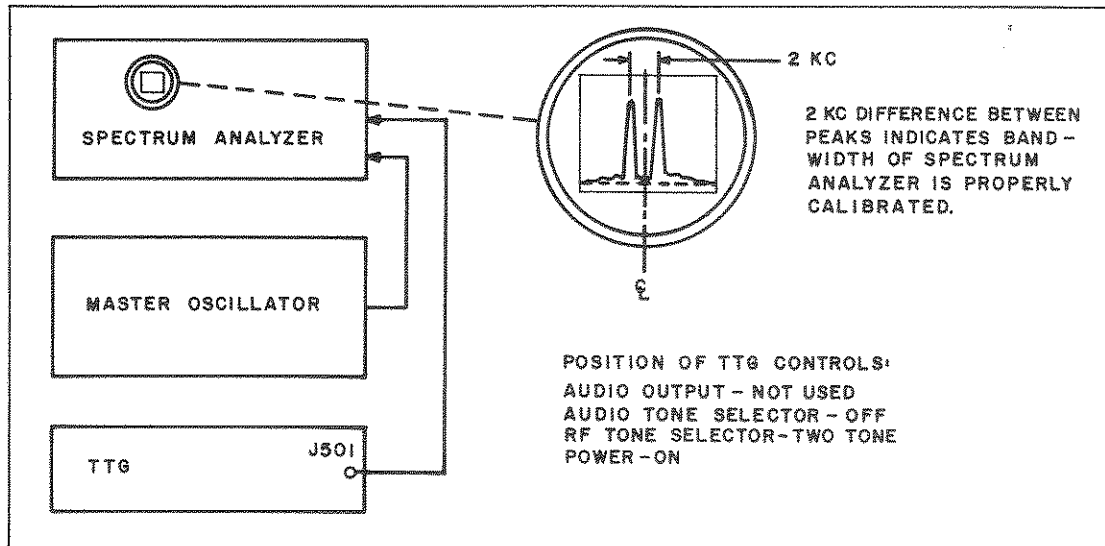


COPYRIGHT, 1959  
THE TECHNICAL MATERIEL CORPORATION

# THE TECHNICAL MATERIEL CORPORATION

700 FENIMORE ROAD

MAMARONECK, NEW YORK

CABLE  
TEPEI  
MAMARONECK, N.Y.



COMMUNICATION ENGINEERS

IN CANADA:  
TMC (CANADA) LTD.  
OTTAWA, ONTARIO