


JJ-241

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

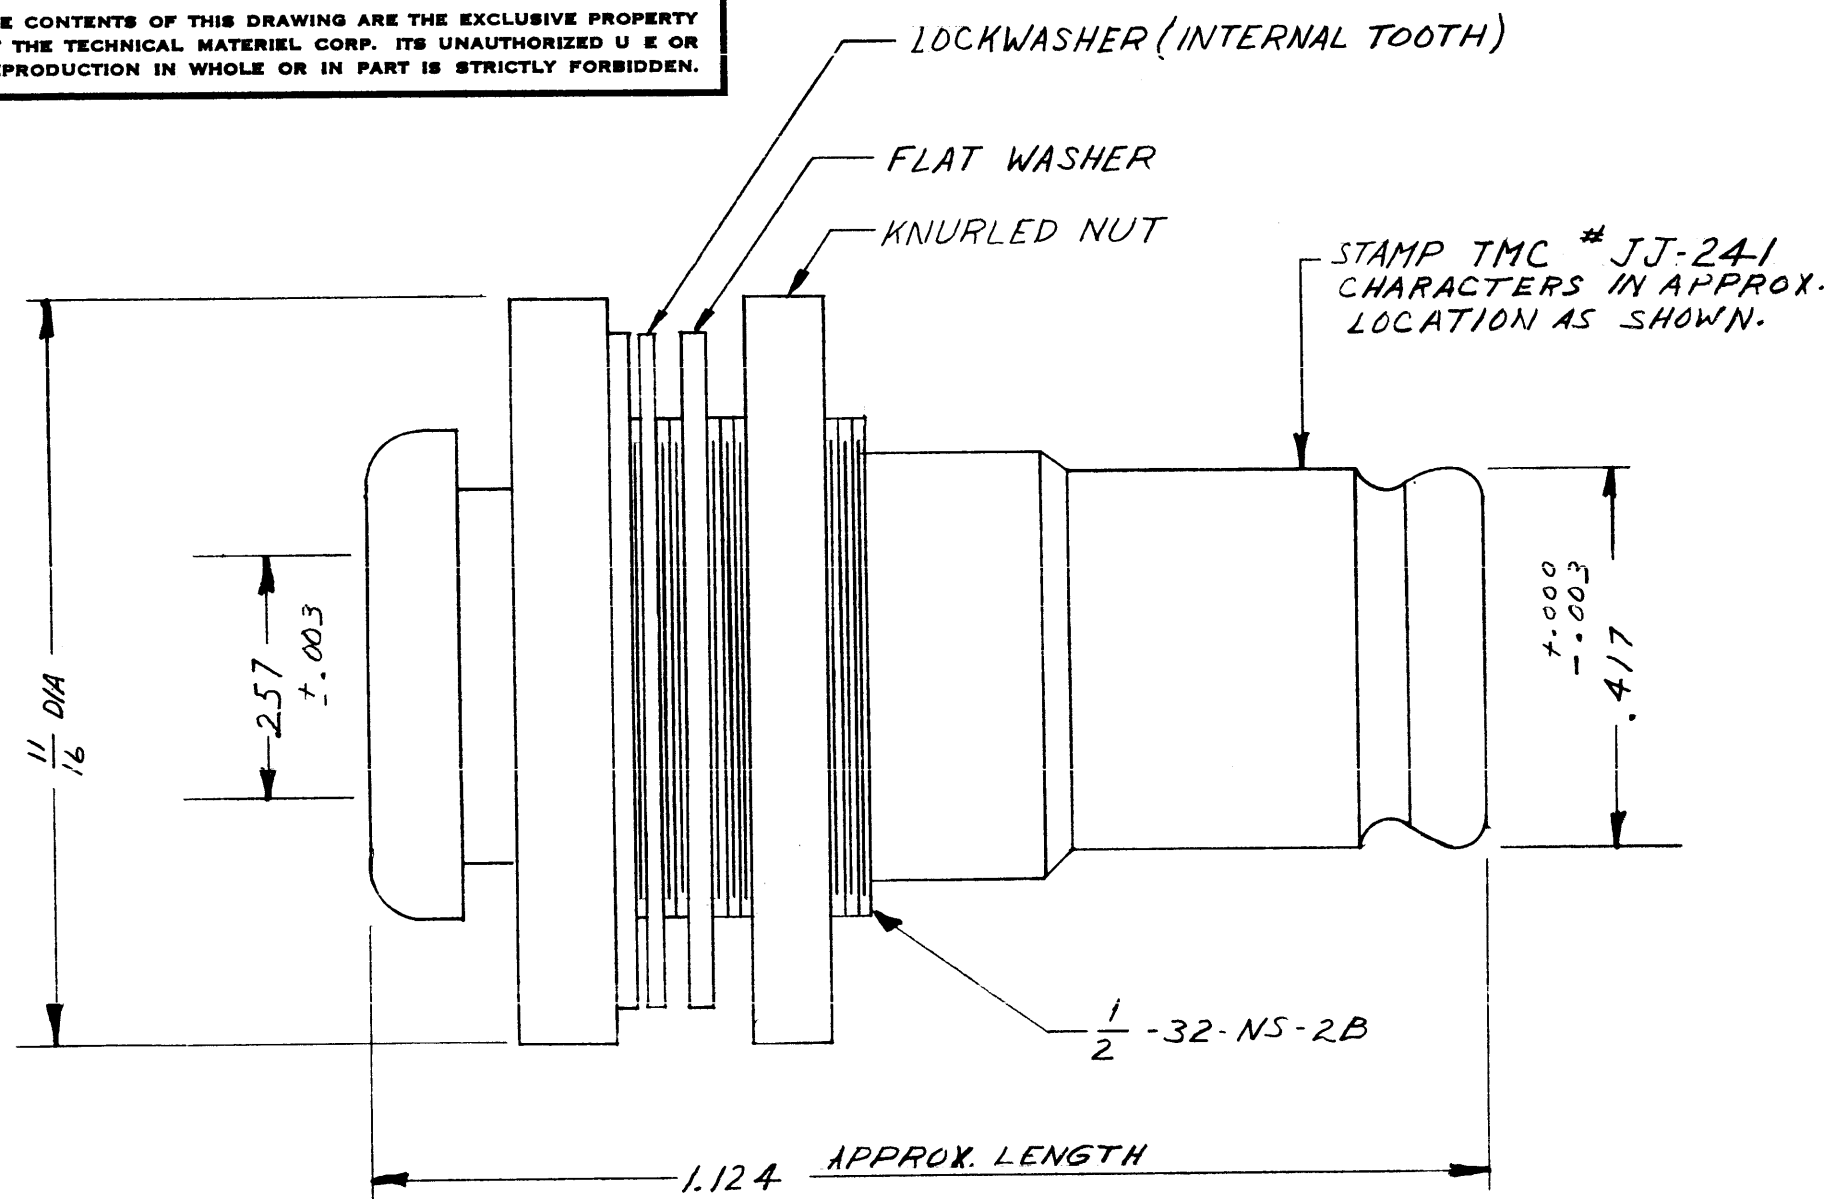

SPECIFICATIONS

SERIES - QDM
 NO. OF CONTACTS - ONE (1)
 DIELECTRIC - TEFLON

ELECTRICAL DATA

MAX. PEAK VOLTAGE - 500V
 FREQ. LIMIT - 10,000
 NOM. IMPEDANCE - 70 Ω

CABLE ACCOMMODATIONS

TYPE - RG-59/U AND RG-62/U
 MAX. O.D. - .242
 IMPEDANCE - 75 ± 3 OHMS

MATERIAL

EXTERNAL PARTS - BRASS
 CONTACTS - BERYLLIUM COPPER

FINISH

EXTERNAL PARTS - SILVER PLATE & RHODIUM FLASH
 CONTACTS - SILVER PLATE & GOLD FLASH

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE: 3/401-70 (3015)				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°		REMOVE ALL BURRS AND SHARP EDGES				

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
				11-26-65

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
		STOCK SIZE		
		SEE NOTE		
		CONNECTOR, RECEPTACLE, ELECTRICAL		
		MATERIAL		
		G. SENCEN	AD	BP
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
		SEE NOTE		CHECKED
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
				JJ-241